



dimming and CCT



Features:

- . European AC input (220-240VAC).
- . DALI 2.0 DT6/DT8 dimming and CCT
- . Built-in press dimming function
- . Dimming scope 1-10%
- . Protections: Short circuit / Over temperature / Over voltage.
- . Adopt plastic case and internal glue potting.
- . Built-in lightning protection device, can meet the difference mode 1kV.
- . Comply with the world lighting equipment safety standards.
- . High efficiency power supply: >93%
- . 3 years warranty.

Description:

The SDL150 series is an indoor constant voltage LED DALI power supply with an input voltage range of 198-264Vac, whose efficiency is up to 93%, adopt fanless design, it's working in the temperature range of - 20 ° C to + 45° C under free air convection. It has a high power factor, ultra-low total harmonic distortion, low standby power consumption, lightning protection and other comprehensive protection functions, which not only greatly improve the reliability of the product, but also guarantee the product life cycle. This series of products is designed for LED lighting and is used in indoor lighting applications. They are suitable for a wide range of applications in almost any environment where LED luminaires can be installed. Comply with DALI2.0 standard (IEC 62386-101, 102, 207, 209), Innovative thermal management technology, intelligent protection of power supply life.

Model:

Model	Output voltage	Output current	Max. Output power	Output voltage precision	Total harmonic distortion (Typ.)	Power factor (Typ.)	Efficiency (Typ.)
SDL150-12VF6	12V	0-11A	132W	±5%	5%	0.98	92%
SDL150-24VF6/8	24V	0-6.25A	150W	±5%	5%	0.98	93%

Remark: All the parameters are measured at 230VAC input, full load and 25 °C of ambient temperature if they are not specially mentioned.

PUSH Dimming/CCT

Dimming: Press long time

Switch: Press short time

Dimming Memory: When the light is turned off and switched on again, the light will return to the previously adjusted brightness level

Brightness and color temperature are adjusted in opposite directions with each long press

Long press for more than 15s is the synchronization function, and all devices are adjusted to 50%. Long press again to adjust the dimming brightness downward (the color temperature will be unified to 4500k, and long press again to adjust the color

temperature downward)


Input:

Parameter	Min. value	Typical value	Max. value	Note
Rated input voltage	220 Vac		240Vac	Derating curve is shown in figure
Input voltage	198 Vac		264Vac	
Input frequency	47Hz		63Hz	
Max. Input current			0.9A	
Input inrush current			75A	230Vac/50Hz, Cold Start
Power factor	0.95	0.98		230Vac, Full Load
Total harmonic input		5%	8%	230Vac, Full Load
Leakage current			0.7mA	230Vac/50Hz, Full Load
Stand-by power consumption		0.45W	0.5W	230Vac/50Hz, No Load

Output:

Parameter	SDL150-12VF6	SDL150-24VF6/8	Note
Output voltage	12.0VDC	24.0VDC	
Rated output current	11A	6.25A	
Output current	1.1-11A	0.625-6.25A	
Rated output power	132W	150W	
Rated output efficiency	92%	93%	230Vac
Output voltage precision	±5%		
Output voltage ripple (PK-PK)	±3%		Full load (Test under 20M bandwidth)
Output current ripple (PK-PK)	---		Full load (Test under 20M bandwidth)
Rise time	100mS		230Vac
Startup time	500mS		230Vac
Line regulation	±1%		full load
Load regulation	±1%		

Characteristic Curve:

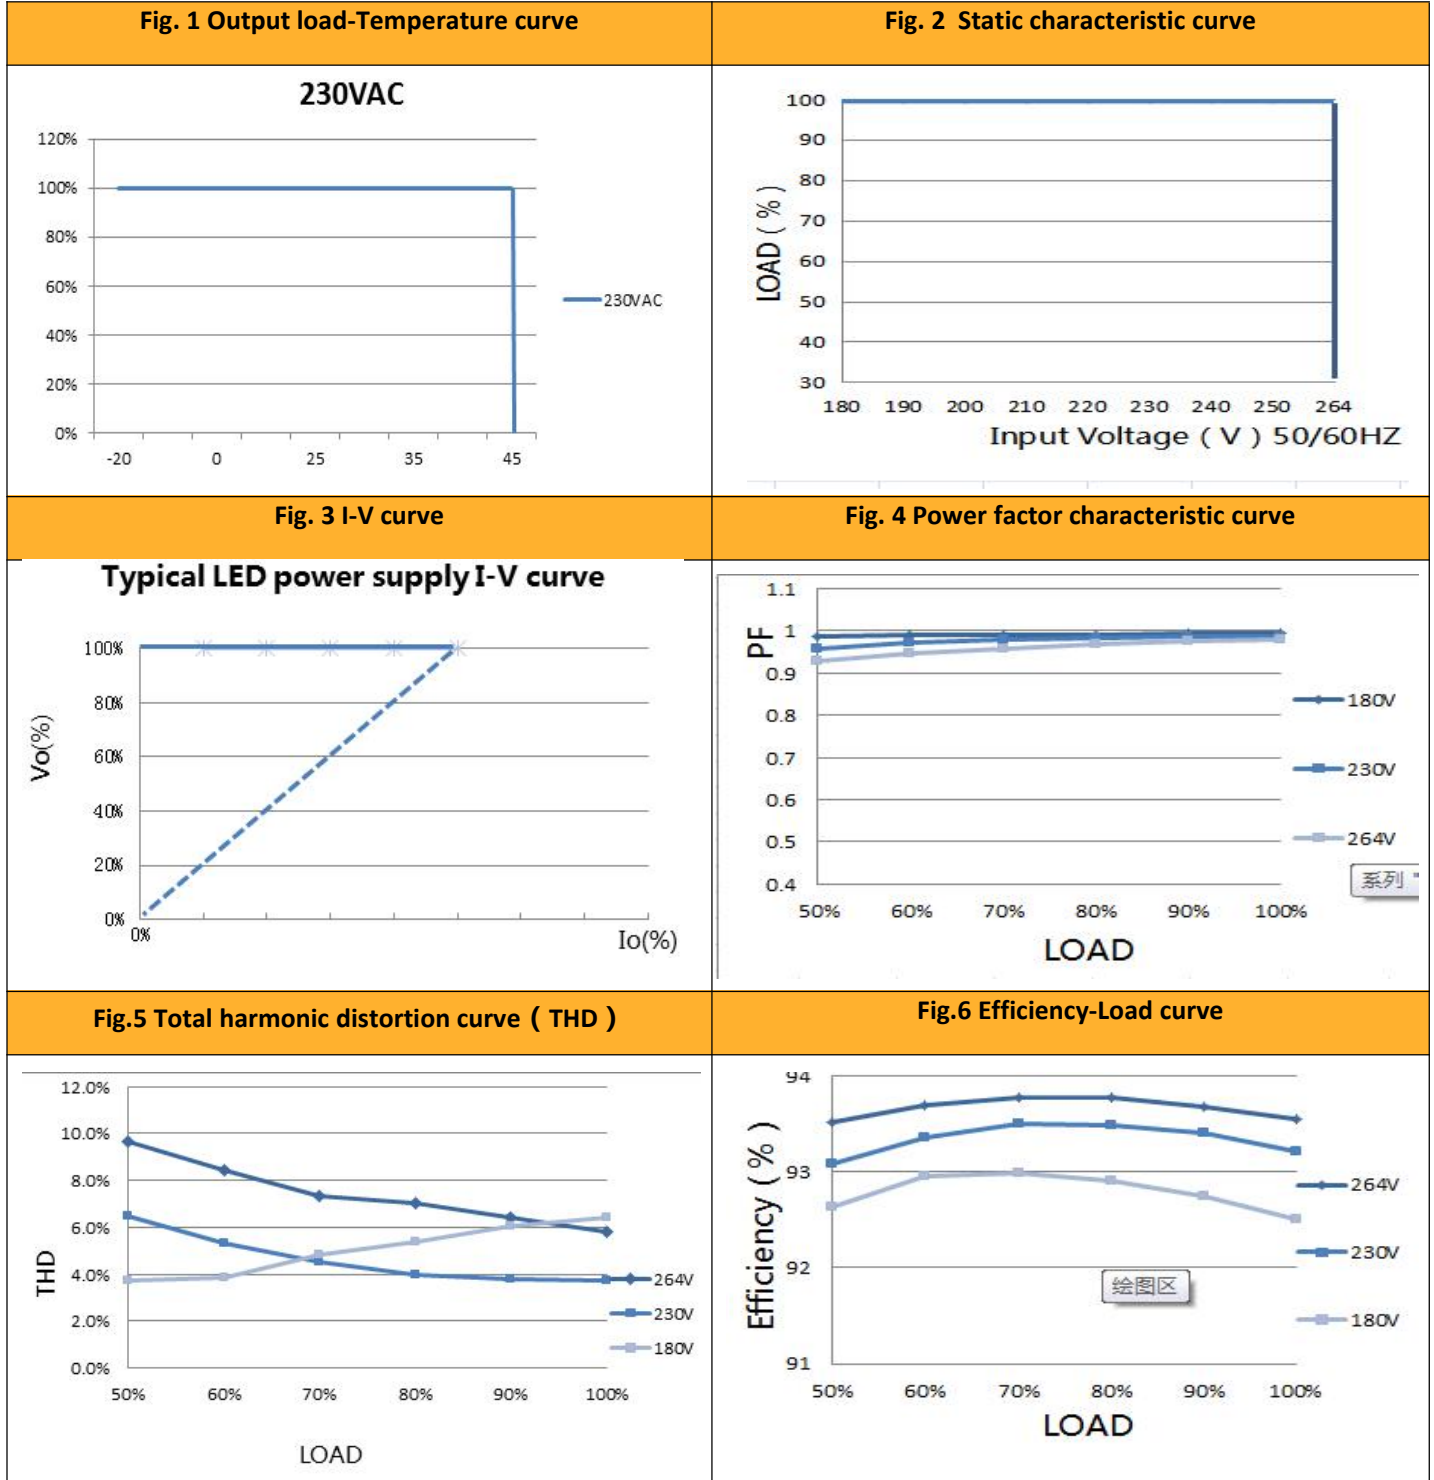

Protection:

Parameter		Conditions	Note
Protection	Over load	1.1-1.6 times rated load	Auto-recovery after overload removed.
	Short circuit	Short circuit power \leq 0.5W	Hiccup mode, auto-recovery after short circuit removed.
	Over voltage	1.5 times of rated output voltage	Turn off the input voltage and recover after restart.
	Over temperature	110 °C	Turn off the input voltage, the temperature can be restored after return to normal.

Environment Requirement:

Parameter	Min.	Typ.	Max.	Note
Working temp.	-20°C	25°C	+45°C	See Fig.1
Storage temp.	-40°C	25°C	+85°C	
Working humidity	10%RH		90%RH	
Storage humidity	5%RH		95%RH	
IP grade			IP20	
Cooling mode	Natural cooling			

Remark: All the parameters are measured at 25 °C of ambient temperature if they are not specially mentioned.


Safety&EMC standard:

Certificate		Safety standards	Certification	Note
UL/CUL		---		
TUV		EN61347-1:2015 EN 61347-2-13:2014+A1 EN62493:2015	√	
SAA		AS/NZS 61347.2.13		
CCC		---		
CE		EN 61347-2-13:2014 +A1 EN61347-1:2015	√	
Safety test		Qualification	Note	
Dielectric compressive strength	Input to output	3750Vac/5mA Max/60s	Reinforced insulation, no breakdown, no flashover	
	Primary to ground	---	Basic insulation, no breakdown, no flashover	
	Secondary to ground	---	Functional insulation, no breakdown, no flashover	
Insulation resistance	Input to output	≥10MΩ	Test voltage : 500Vdc	
Grounding resistance		---	25A/1min	
Leakage current		≤0.75mA	264Vac	
EMI/EMS item		Standard/Level	Data	
Conduction CE		EN55015		
Radiation RE		EN55015		
Harmonics		EN IEC 61000-3-2	Class C	


Others:

Parameters	Condition	note
Lifetime	30,000 hours	230Vac,full load, case Temp. 75℃
MTBF	200,000 hours	230Vac,full load, environment Temp. 25℃ (MIL-HDBK-217F)
TC	85℃	
Warranty	3 years	
Weight	300 g	
Dimensions	336.6mm * 30mm * 18.2mm	L x W x H

Mechanical Specification (Unit : mm)

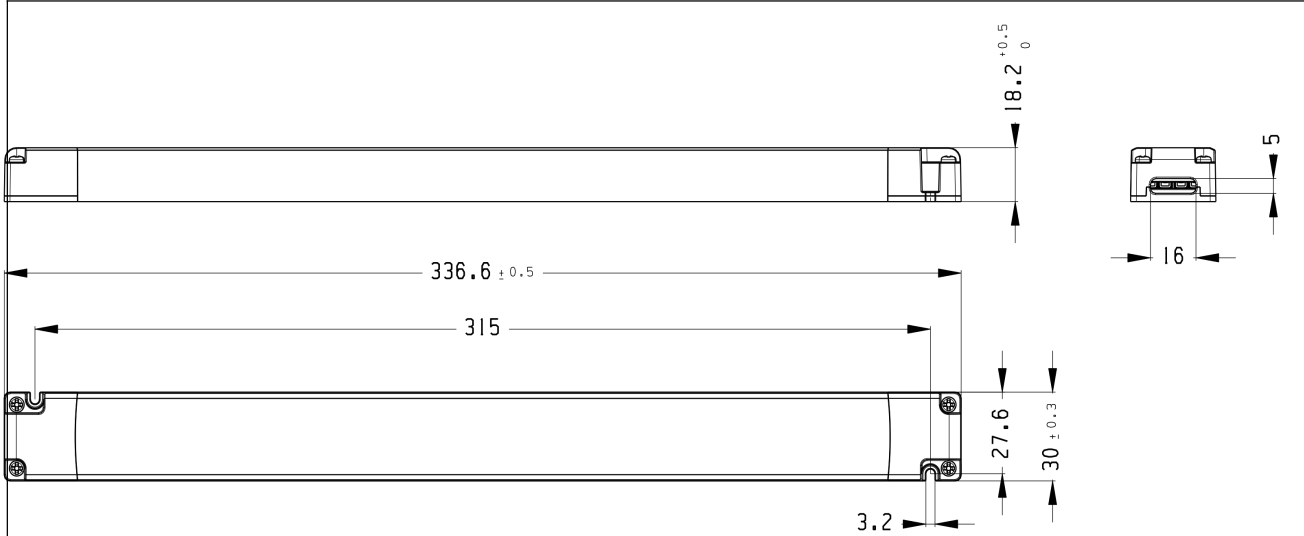

PUSH dimming connection diagram

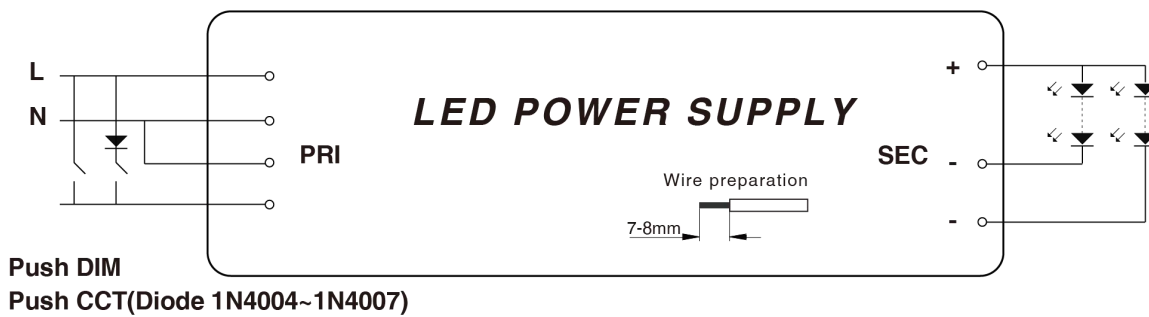

Remark :

AC input cable	Terminal block,H05VVH2-F 2×1.0mm ²
DC output cable	Terminal block,H03VVH2-F 2×1.0 mm ² *