



# RB24V100

Voltage: 25.6V | Capacity: 100 Ah | Energy: 2560 Wh | Group: 8D

LITHIUM IRON PHOSPHATE BATTERY **LiFePO<sub>4</sub>**

## ELECTRICAL SPECIFICATIONS

|                           |                  |
|---------------------------|------------------|
| Nominal Voltage           | 25.6 V           |
| Nominal Capacity          | 100 Ah           |
| Capacity @ 25A            | 240 min          |
| Resistance                | ≤30 mΩ @ 50% SOC |
| Efficiency                | 99%              |
| Self Discharge            | <3% per Month    |
| Maximum Modules in Series | 1 (Single Use)   |

## DISCHARGE SPECIFICATIONS

|                                      |                                 |
|--------------------------------------|---------------------------------|
| Maximum Continuous Discharge Current | 100 A                           |
| Peak Discharge Current               | 200 A (7.5 s ±2.5 s)            |
| BMS Discharge Current Cut-Off        | 280 A ±50 A (9 ±4 ms)           |
| Recommended Low Voltage Disconnect   | 22 V                            |
| BMS Discharge Voltage Cut-Off        | 16 V (2.0 ±0.08 vpc) (20 ±6 ms) |
| Reconnect Voltage                    | 20 V (2.5 ±0.05 vpc)            |
| Short Circuit Protection             | 200-600 μs                      |

## TEMPERATURE SPECIFICATIONS

|                              |                             |
|------------------------------|-----------------------------|
| Discharge Temperature        | -4 to 140 °F (-20 to 60 °C) |
| Charge Temperature*          | -4 to 113 °F (-20 to 45 °C) |
| Storage Temperature          | 23 to 95 °F (-5 to 35 °C)   |
| BMS High Temperature Cut-Off | 176 °F (80 °C)              |
| Reconnect Temperature        | 122 °F (50 °C)              |

\*Refer to charge currents below 32°F (0°C)

## MECHANICAL SPECIFICATIONS

|                        |  |
|------------------------|--|
| Dimensions (L x W x H) | 20.5 x 10.5 x 9.0"<br>520 x 267 x 228 mm |
| Weight                 | 61.1 lbs (27.7 kg)                       |
| Terminal Type          | M8 x 1.25 x 12mm                         |
| Terminal Torque        | 80 - 100 in-lbs (9 - 11 N-m)             |
| Case Material          | ABS                                      |
| Enclosure Protection   | IP66                                     |
| Cell Type - Chemistry  | Cylindrical - LiFePO <sub>4</sub>        |


## CHARGE SPECIFICATIONS

|  |                                      |
|--|--------------------------------------|
| Recommended Charge Current                 | 5 A - 50 A                           |
| Maximum Charge Current                     | 100 A                                |
| Charge Current 14 to 32 °F (-10 to 0 °C)   | ≤0.1 C                               |
| Charge Current -4 to 14 °F (-20 to -10 °C) | ≤0.05 C                              |
| Recommended Charge Voltage                 | 28.4 V - 29.2 V                      |
| BMS Charge Voltage Cut-Off                 | 31.2 V (3.9 ±0.025 vpc) (1.1 ±0.4 s) |
| Reconnect Voltage                          | 28.8 V (3.8 ±0.05 vpc)               |
| Balancing Voltage                          | 28.8 V (3.6 vpc)                     |

## COMPLIANCE SPECIFICATIONS

|                         |   |
|-------------------------|---|
| Certifications          | CE (battery)<br>UL1642 & IEC62133 (cells) |
| Shipping Classification | UN 3480, CLASS 9                          |

## DIMENSIONAL SPECIFICATIONS

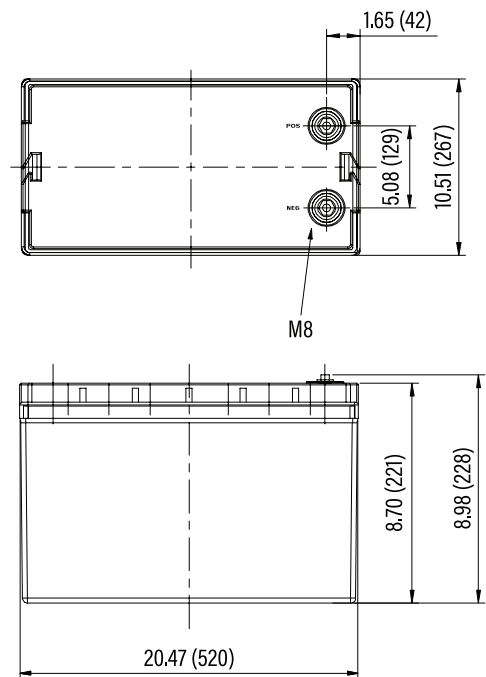



# RB24V100

Voltage: 25.6V | Capacity: 100 Ah | Energy: 2560 Wh | Group: 8D

LITHIUM IRON PHOSPHATE BATTERY **LiFePO4**

## PERFORMANCE CHARACTERISTICS

