



RB60

Voltage: 12.8V | Capacity: 60 Ah | Energy: 768 Wh | Group: 24

LITHIUM IRON PHOSPHATE BATTERY **LiFePO4**

ELECTRICAL SPECIFICATIONS

Nominal Voltage	12.8V
Nominal Capacity	60 Ah
Capacity @ 25A	144 min
Resistance	≤40 mΩ @ 50% SOC
Efficiency	99%
Self Discharge	<3% per Month
Maximum Modules in Series	3

DISCHARGE SPECIFICATIONS

Maximum Continuous Discharge Current	60 A
Peak Discharge Current	140 A (1.5 s ±0.5 s)
BMS Discharge Current Cut-Off	160 A (9 ms ±4 ms)
Recommended Low Voltage Disconnect	10V
BMS Discharge Voltage Cut-Off	8 V (2.0 ±0.1 vpc) (144 ms ±30 ms)
Reconnect Voltage	8.64 V (2.16 ±0.24 vpc)
Short Circuit Protection	100-800uS

TEMPERATURE SPECIFICATIONS

Discharge Temperature	-4 to 140 °F (-20 to 60 °C)
Charge Temperature	32 to 113 °F (0 to 45 °C)
Storage Temperature	23 to 95 °F (-5 to 35°C)
BMS High Temperature Cut-Off	167 °F (75 °C)
Reconnect Temperature	122°F (50 °C)

MECHANICAL SPECIFICATIONS

Dimensions (L x W x H)	10.2 x 6.6 x 8.2" 260 x 168 x 218 mm
Weight	15.9 lbs (7.20 kg)
Terminal Type	M8 x 1.25
Terminal Torque	80 - 100 in-lbs (9 - 11 N-m)
Case Material	ABS
Enclosure Protection	IP66
Cell Type - Chemistry	Cylindrical - LiFePO4



CHARGE SPECIFICATIONS

Recommended Charge Current	12 A
Maximum Charge Current	60 A
Charge Current 14 to 32°F (-10 to 0°C)	≤0.1 C
Charge Current -4 to 14°F (-20 to -10°C)	≤0.05 C
Recommended Charge Voltage	14.2 V - 14.6 V
BMS Charge Voltage Cut-Off	15.6 V (3.9 ±0.025 vpc) (1.2 s ±0.3 s)
Reconnect Voltage	15.2 V (3.8 ±0.05 vpc)
Balancing Voltage	14.4 V (3.6 ±0.025 vpc)

COMPLIANCE SPECIFICATIONS

Certifications	UN38.3 (battery) CE (battery) UL1642 & IEC62133 (cells)
Shipping Classification	UN 3480, CLASS 9

DIMENSIONAL SPECIFICATIONS

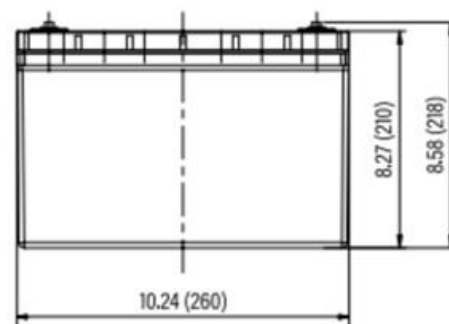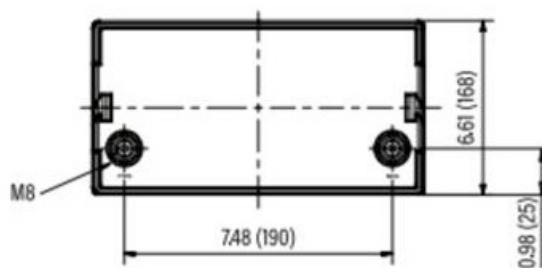



RB60

Voltage: 12.8V | Capacity: 60 Ah | Energy: 768 Wh | Group: 24

LITHIUM IRON PHOSPHATE BATTERY **LiFePO4**

PERFORMANCE CHARACTERISTICS

