

## PRODUCT DESCRIPTION

BF PRINTGLOW is a printable polyurethane film with a photoluminescent finishing designed to make the graphics details bright in the dark. Thanks to its self-adhesive PET film carrier even very small letters and logos can be easily cut by all current cutting plotters after the printing process.

We recommend using BF MYLAR as a transfer tape and as a protection during the heat transfer.

## APPLICATION STEPS

- Print - do not mirror
- Cut - 45° blade
- Weed excess material
- Apply BF MYLAR - remove air bubbles
- Remove from liner
- Turn on your heat press - heat to 145°C/295°F
- Place your graphic on the shirt
- Press it - 145°C/295°F for 12 seconds
- Wait 6/7 seconds
- Remove BF MYLAR - semi-hot

## SIZES

**H 50 cm** L 25 mt / 12,5mt / 5 mt

**H 75 cm** /

**H 100 cm** /

**H 150 cm** /

Comply with  
regulation **REACH**  
n°1907/2006/EU

## SAFETY NOTICE

The values reported in this document are average values as tested under normal conditions in our lab. We cannot provide a guarantee regarding the information above mentioned in this page. Due to possible variations in the production of garments, B-FLEX recommends testing the material prior to all applications. Rev\_2021/03

## TECHNICAL DATA



Film: PU/polyurethane



Thickness: 140μ (±5%)



Liner: adhesive PET



Finish: matte



Inks: solvent, eco-solvent, latex

## PLOTTER SETTING



Cut settings: do not mirror



Blade: 45°



Minimum cut: 2 cm

## APPLICATION



Temperature: 145°C - 295°F



Time: 12''



Liner removal: semi-hot,  
wait 6/7 seconds



Pressure: medium - 3,5 bar - 50 PSI



Textile: organic, synthetic, mixed

## WASH RESISTANCE

First wash after application wait 12 hours

Max wash temperature\* 40°C - 104°F

Dry clean ✗


Dryer ✗

\*Temperatures related on heat transfer vinyl; for the inks features, refer to the data sheet inks producer's.

follow us

**BF PRINTGLOW**

PRINT&CUT

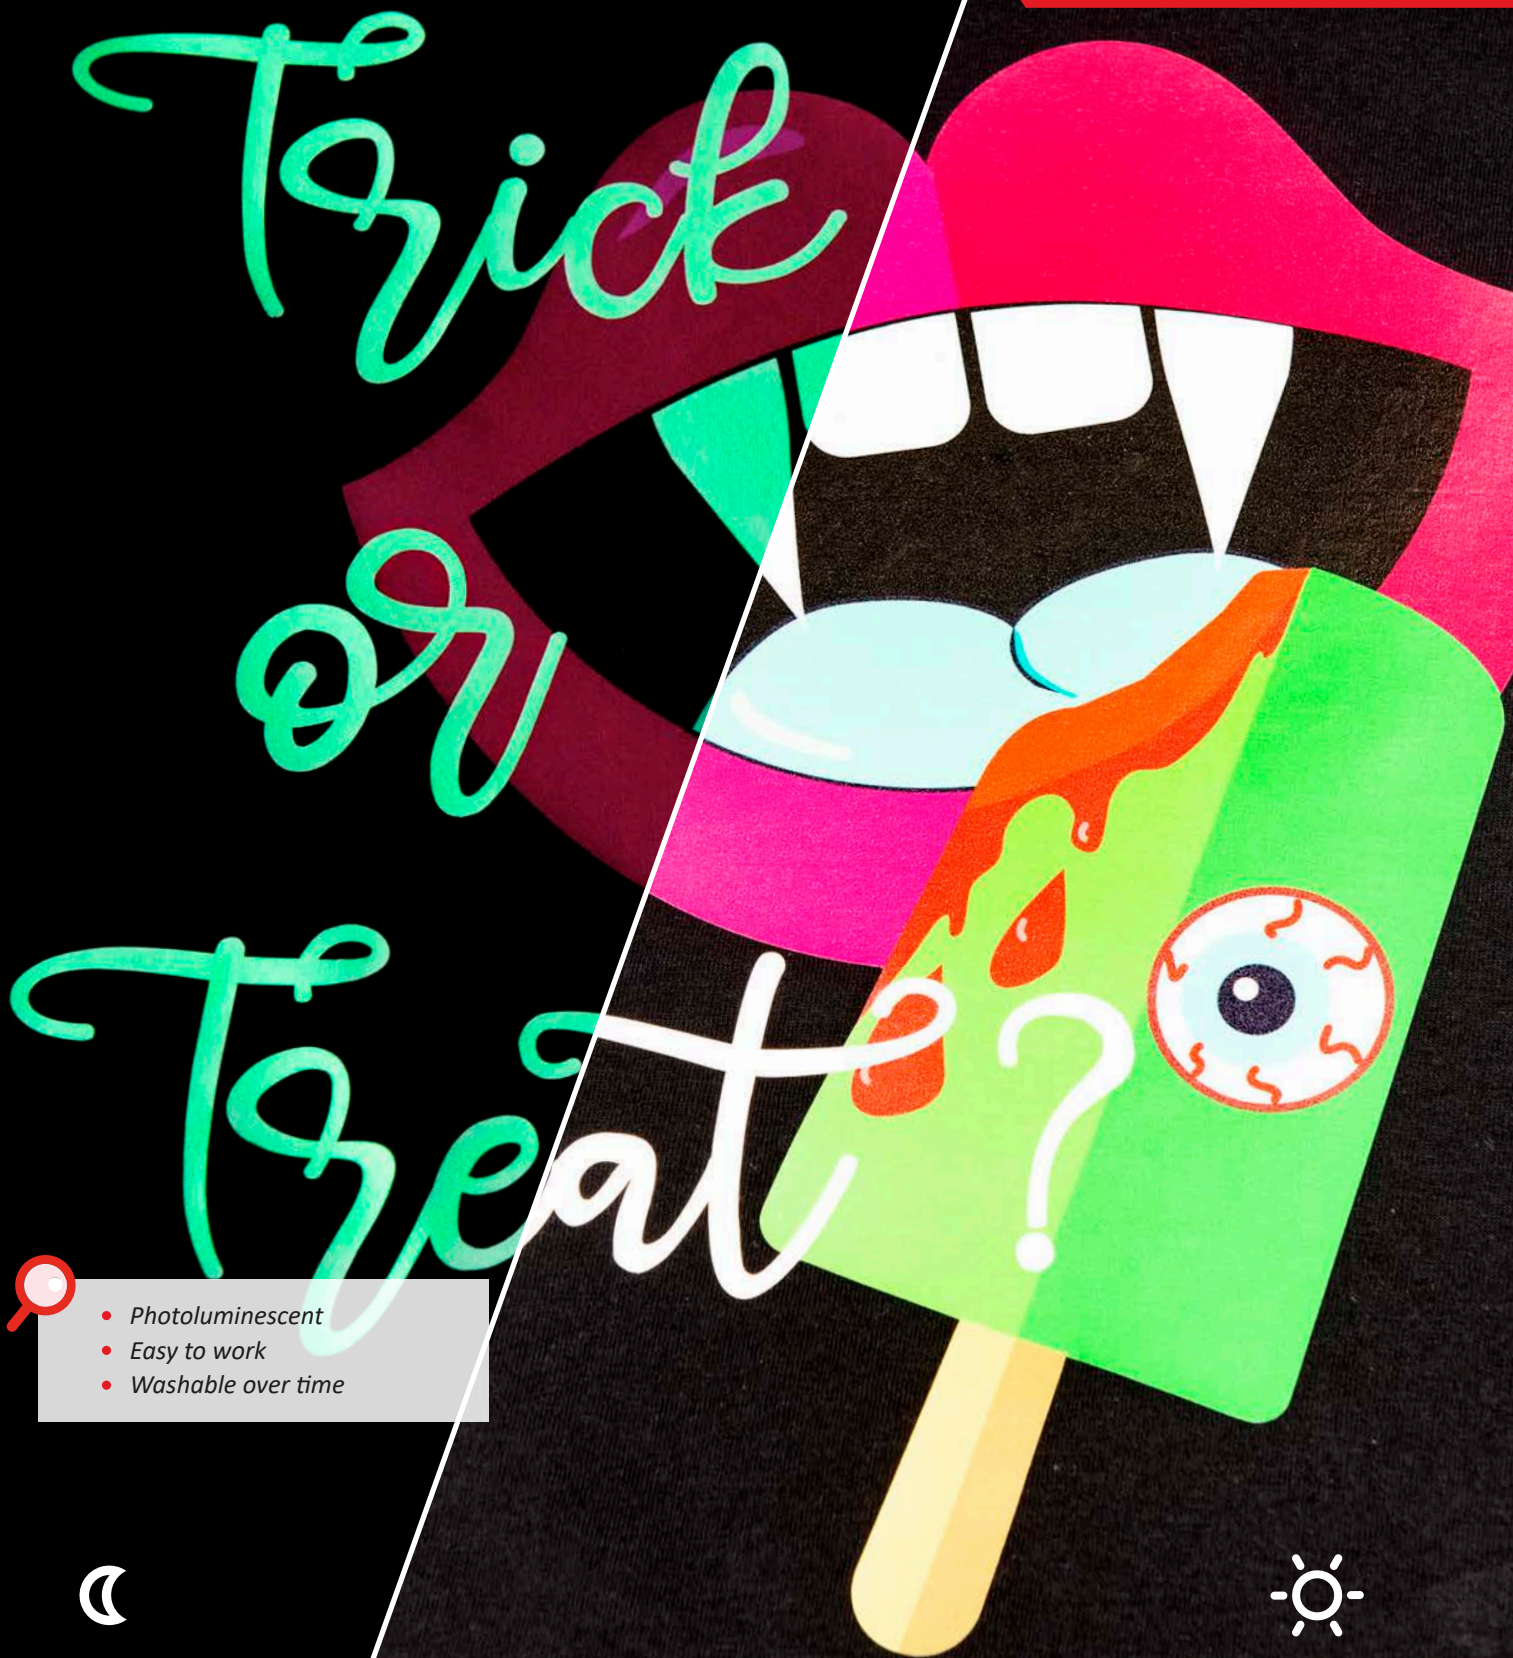

- *Photoluminescent*
- *Easy to work*
- *Washable over time*

