

Snappy King Second Burner Instructions

Included in package:

1x New burner (1)
1x Quick connect hose (3)


What you'll need:

1x Existing Snappy King burner (2)

1x Existing hose and regulator (4)

1x Phillips head screwdriver

1x Shifting spanner

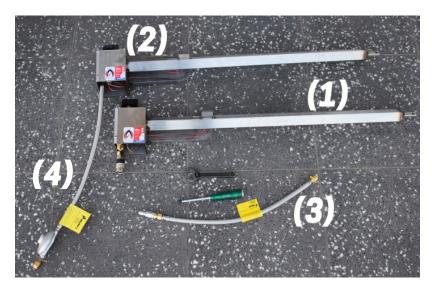


1. Remove your hose and regulator (4) from your gas bottle and existing burner (2). Remove the side plate from the control box with a screwdriver to access the hose fittings.





2. Attach quick connect hose (3) to existing burner (2).





3. Attach hose and regulator (4) to the new burner (1).






4. Place new burner (1) into rear burner slot of Snappy King, followed by the existing burner (2) in the front burner slot.





5. Attach the two burners together via quick connect fitting (3). Pull the silver gripped part back while inserting the fitting. Release this, then twist the black gripped ring to lock in place.

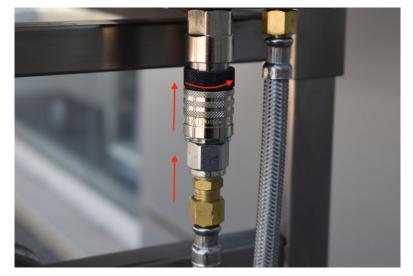



6. Reattach hose and regulator (4) to gas bottle and enjoy!