



Oase

EXCLUSIVELY REPRESENTED BY AQUATEC EQUIPMENT
AUSTRALIAN INDOOR AQUATICS DISTRIBUTORS

AQUATEC

EQUIPMENT

Inside

INDOOR AQUATICS RANGE

Our Vision - We create the right flow.

IT'S EXACTLY WHAT WE WANT.

Based on this approach, we act in accordance with fixed values and guidelines in cooperation with our customers, suppliers and each other - consistently focusing on the needs of our customers.

In contrast, we have the same requirements as our system and product solutions: we expect perfect fit and precision.

Water is our element.

We shape water, create living spaces with a life-giving element and improve its quality - we are constantly creating, developing, manufacturing, testing, selling and improving our portfolio with great solutions for our customers.

We never stop, as does the water around which our entire activity is built: we always look for the right flow.

For more useful and up-to-date information on OASE aquarium products and offers, call our sales team on 08 6260 1000 or email oase@aquatecequipment.com.

ScaperLine aquarium sets

An aquascape as a living work of art – we provide the framework that is coordinated down to the finest detail

+ DETAILED DESIGN

Aquascapers have given it a lot of thought and have incorporated practical details into the ScaperLine aquarium combination that are second to none

+ FOR VIRTUALLY ANY ENVIRONMENT

The aquascape will fit into any interior as it's available in three sizes with two cabinet options - black and grey

+ PULL-OUT FILTER CRAWLER

The external filter can be easily cleaned with the convenient pull-out filter drawer



+ CLEAN LOOK

The cable duct on the cabinet and the specially polished glass edges ensure clear contours and give your artwork an aesthetic frame

+ EASY TO MAINTAIN

The practical magnetic tool holder in the base cabinet keeps aquascaping tools or a towel in easy reach - for easier setup and care

+ CO-ORDINATED

The aquarium and base cabinet complement each other perfectly and the tank joins seamlessly with the cabinet - with no unsightly edges

+ CONVERSION TO A ROOM DIVIDER

The optional room divider plate, which can be mounted on the back of the cabinet, makes it possible to turn the ScaperLine into a room divider

+ CABLE & HOSE FEED THROUGH

The cable and hose feed-throughs on both sides, either of which can be closed up as required, ensure an organised aquarium, depending on the number of cables and hoses



Grey option



1. Immaculately luminous:

Mitred glass walls create a stylish frame for your artwork

2. Function and design:

Push-to-open function and the absence of external handles ensure that the base unit and aquarium share a common, flush line.

3. Functional features:

The cable feed-through in the base unit can be optionally closed and is almost invisible.

4. Intelligent convenience:

Specially embedded magnetic points hold the scaper tools in place.

TECHNICAL DATA

	60	90	100
Model	60	90	100
Volume in litres	75	180	250
Aquarium dimensions (L x W x H)	60 x 35 x 35	90 x 45 x 45	100 x 50 x 50
Glass thickness	6	8	10
Dimensions (L x W x H)	60 x 35 x 116	90 x 45 x 126	100 x 50 x 131
Net weight	48.50	68.50	87.90
Guarantee *	Years	2	
Bulb type		-	
Number of lights	Units	0	
Product Code Grey	08OA200	08OA202	08OA204
Product Code Black	08OA201	08OA203	08OA205

*Guarantee valid under the guarantee conditions from OASE.

StyleLine aquarium sets

Individual aquatic style. Now for everyone



CLASSIC CHIC

Available in black and white



SOPHISTICATED DESIGN

The water and substrate line are covered to stylishly frame the view of the aquarium inhabitants and plants



CONVENIENT

There are one or two cut-outs on the back for cables and hoses to facilitate installation



Black option



CLEAN & WELL-TEMPERED

Includes BioPlus Thermo 100 or Thermo 200 internal filter with integrated heater



MADE IN GERMANY

Base cabinet with modern push-to-open function on the handle-free designer doors with aluminium-look feet




SPACIOUS

Plenty of storage space in the cabinet - shelf included



WELL-PROTECTED

The opaque sliding glass cover is stylish, practical and easy to care for

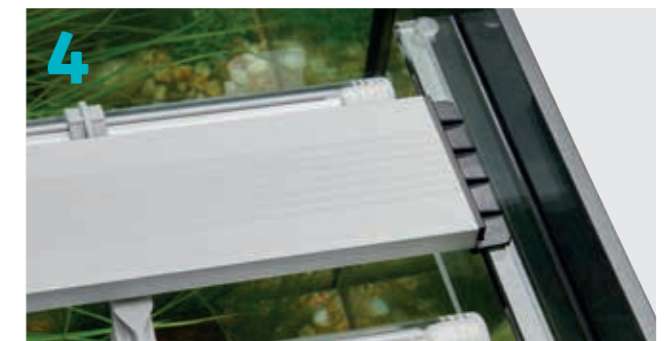

1. Stylish and modern:

The StyleLine aquarium can be integrated into a modern living room as desired.

2. Keep it clean:

The practical sliding glass cover is completely removable and easy to clean.

3. Easy cleaning:

The BioPlus Thermo 100/Thermo 200 corner internal filter provides a clear view of the underwater world without any disruptive equipment. Only the filter unit needs to be removed for cleaning, which makes for straightforward, time-saving aquarium care.

4. Lighting:

Modern, contemporary lighting: A classic LED lighting kit is already included. The optimally coordinated light spectrum (6500 Kelvin) ensures good plant growth and beautifully sets the scene for your aquarium inhabitants.

TECHNICAL DATA

Model		85	125	175
Volume in litres	l	75	115	160
Aquarium dimensions (L x W x H)	cm	50 x 36 x 42	70 x 36 x 50	80 x 40 x 55
Glass thickness	mm		6	8
Dimensions (L x W x H)	cm	50 x 36 x 140.5	70 x 36 x 122	80 x 40 x 132
Net weight	kg	41.20	55.50	70.70
Guarantee *	Years		2	
Bulb type			LED daylight	
Number of lights	Units		2	
Product Code White		08OA100	08OA102	08OA104
Product Code Black		08OA101	08OA103	08OA105

*Guarantee valid under the guarantee conditions from OASE.

BioMaster

For the highest demands - designed in Germany

**+ EASYCLEAN
PRE-FILTER MODULE**

No more annoying filter openings as the pre-filter is easily removed, cleaned and replaced

+ ADJUSTABLE

Control the flow on the filter or via the adapter set

**+ OPTIMUM
FILTRATION**

The 45 ppi sponge in the pre-filter provides effective mechanical filtration of coarse dirt and increases the life of the biological material

**+ ECONOMICAL &
QUIET**

Runs quietly and efficiently



+ PRACTICAL



Venting button for effective water suction - to get started quickly and easily during installation and after cleaning

+ OPTIONAL

Includes HeatUp integrated adjustable heater with BioMaster Thermo - can also be retrofitted

+ SAFE

The shut-off mechanism and safety lock prevent unwanted water leaks during filter cleaning

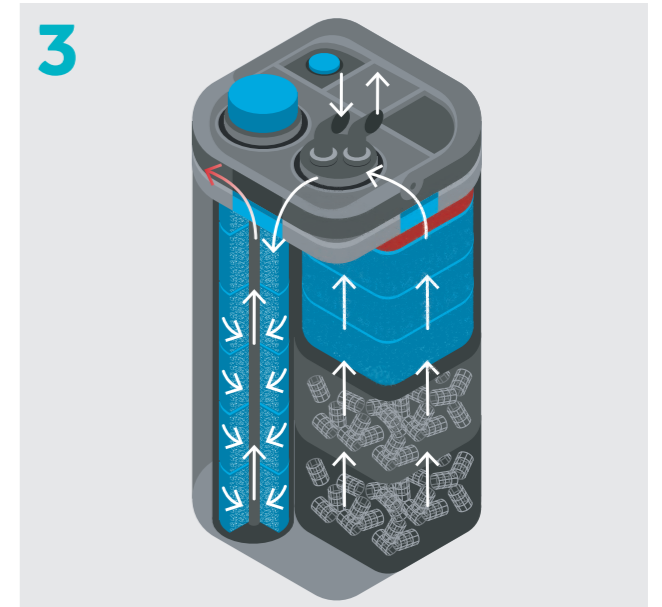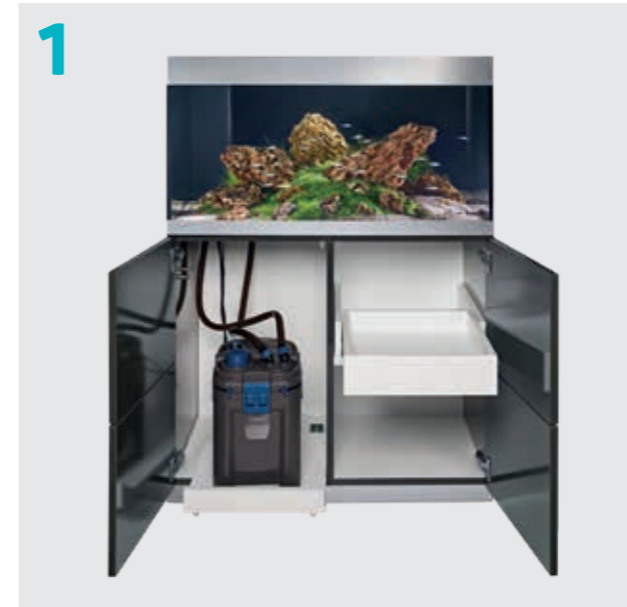

1. Pull-out filter drawer:

The external filter can be easily cleaned with the cleverly designed pull-out filter drawer.

2. Complete set for a quick start:

Including filter media, hoses, adapter, flow regulator, suction and discharge pipe as well as water diffuser.

3. High filter volume:

The combination of highly effective biological filtering with Hel-X and mechanical/biological cleaning with filter sponges is ideally coordinated to ensure healthy and clear aquarium water. The water flows through the pre-filter first, ensuring an extra long service life.

4. Top view:

BioMaster filter.

TECHNICAL DATA

Rated voltage	230 V / 50 Hz	
Power cable length	m 1.50	
Guarantee (+ request guarantee) *	Years	3 + 1
Hose (quantity/length)	1 UNIT/4 m	
Connection for hoses ø (inner/outer)	16 / 22 mm	
Suitable for freshwater	Yes	
Suitable for saltwater		

Product	Suitable for aquariums up to max.	Dimensions (L x W x H)	Power consumption	Power consumption heater	Net weight	Max. flow rate	Max. head height, metres	Product Code
	l	mm	W	W	kg	l/h	m	
BioMaster 250	250	240 x 240 x 370	15	-	5.10	900	1.30	08OA020
BioMaster 350	350	240 x 240 x 425	18		5.40	1100	1.40	08OA021
BioMaster 600	600	240 x 240 x 480	22		6.40	1250	1.80	08OA022
BioMaster 850	850	240 x 240 x 535	32		5.40	1550	2.20	08OA023
BioMaster Thermo 250	250	240 x 240 x 370	15	150	5.20	900	1.30	08OA024
BioMaster Thermo 350	350	240 x 240 x 425	18	200	5.60	1100	1.40	08OA025
BioMaster Thermo 600	600	240 x 240 x 480	22	300	6.20	1250	1.80	08OA026
BioMaster Thermo 850	850	240 x 240 x 535	32	400	7.70	1550	2.20	08OA027

*Guarantee valid under the guarantee conditions from OASE.

FiltoSmart 60

Clever for small aquariums



PRACTICAL

Self-venting function for easy operation



SMART

External filter for smaller aquariums of up to 600 litres



SPACE SAVING

Can be positioned next to or behind the aquarium. Can also be attached to the aquarium wall using the optional bracket



UP AND RUNNING IN NO TIME

Complete set including filter media, hoses, adapters, suction and discharge pipe as well as water diffuser

TECHNICAL DATA

Product	FiltoSmart 60	Product Code
Suitable for aquariums up to max.	l 60	080A010
Dimensions (L x W x H)	mm 150 x 90 x 164	
Rated voltage	230 V / 50 Hz	
Power consumption	W 5	
Power cable length	m 1.50	
Net weight	kg 0.85	
Guarantee*	Years 3	
Max. flow rate	l/h 300	
Max. head height, metres	m 0.70	
Hose (quantity/length)	1 UNIT/1 m	
Connection for hoses ø (inner/outer)	8 / 12 mm	
Filter volume	l 0.5	
Pre-filter volume	l 0.28	
Suitable for freshwater	Yes	
Suitable for saltwater		

*Guarantee valid under the guarantee conditions from OASE. Can be viewed at www.OASE.com/guarantee

ACCESSORIES

Description	Product details	Product Code
Bracket FiltoSmart 60	The FiltoSmart 60 bracket complements the FiltoSmart 60 external filter for small aquariums. The holder makes it easy to attach the space-saving filter to the outside wall of the aquarium.	080A016



FiltoSmart

Convenience and flexibility for medium-sized aquariums

+ EASY TO OPEN
Easy-click opening mechanism

+ ECONOMICAL & QUIET
Runs quietly and efficiently

+ TEMPERATURE CONTROL
HeatUp adjustable heater for individual temperatures available on request



+ EFFECTIVE
Large filter surface despite the compact size, crystal-clear water thanks to multi-stage mechanical/biological filtration

+ COMPLETE SET
Ready for installation: includes a connection set and comes with practical self-venting function

+ STABLE
Safe and stable base

+ SAFE
The shut-off mechanism and safety lock prevent water leaks during filter cleaning




FiltoSmart 100

FiltoSmart 200

FiltoSmart 300

ACCESSORIES

Description	Product details	Product Code
ThermoFit FiltoSmart 100	The ThermoFit makes it possible to retrofit the FiltoSmart external filter with a HeatUp control heater. The HeatUp control heater is not included in the scope of delivery of the FiltoSmart.	08OA014
ThermoFit FiltoSmart 200		08OA017
ThermoFit FiltoSmart 300		08OA015

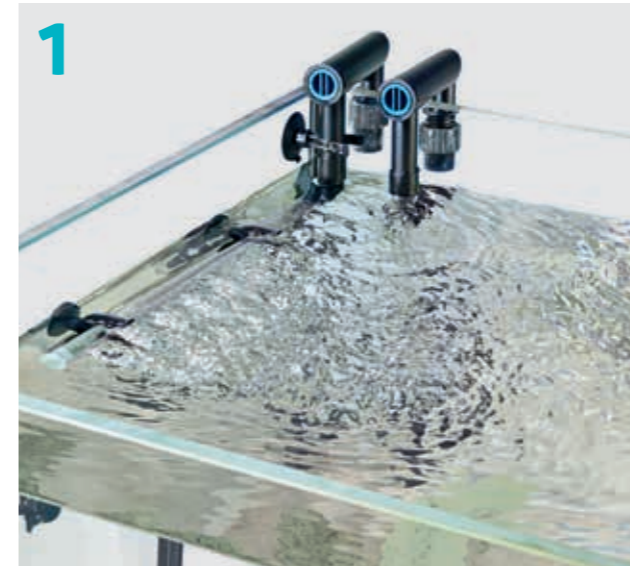

1. Complete quick start set:
Includes filter media, hoses, adapters, flow regulator, suction and discharge pipe as well as water diffuser




2. FiltoSmart 200/300:
Convenient carrying handle.

TECHNICAL DATA

Rated voltage	230 V / 50 Hz
Power cable length	m 1.50
Guarantee	Years 3
Hose (quantity/length)	1 UNIT/2.5 m
Suitable for freshwater	Yes
Suitable for saltwater	

Product	Suitable for aquariums up to max.	Dimensions (L x W x H)	Power consumption	Optional Heater	Net weight	Max. flow rate	Max. head height, metres	Product Code
	l	mm	W	W	kg	l/h	m	
FiltoSmart 100	100	205 x 139 x 260	11	100	2.00	600	1.10	08OA011
FiltoSmart 200	200	288 x 179 x 337	17	200	4.13	800		08OA012
FiltoSmart 300	300	288 x 179 x 428	23	300	4.85	1000	1.30	08OA013

*Guarantee valid under the guarantee conditions from OASE.

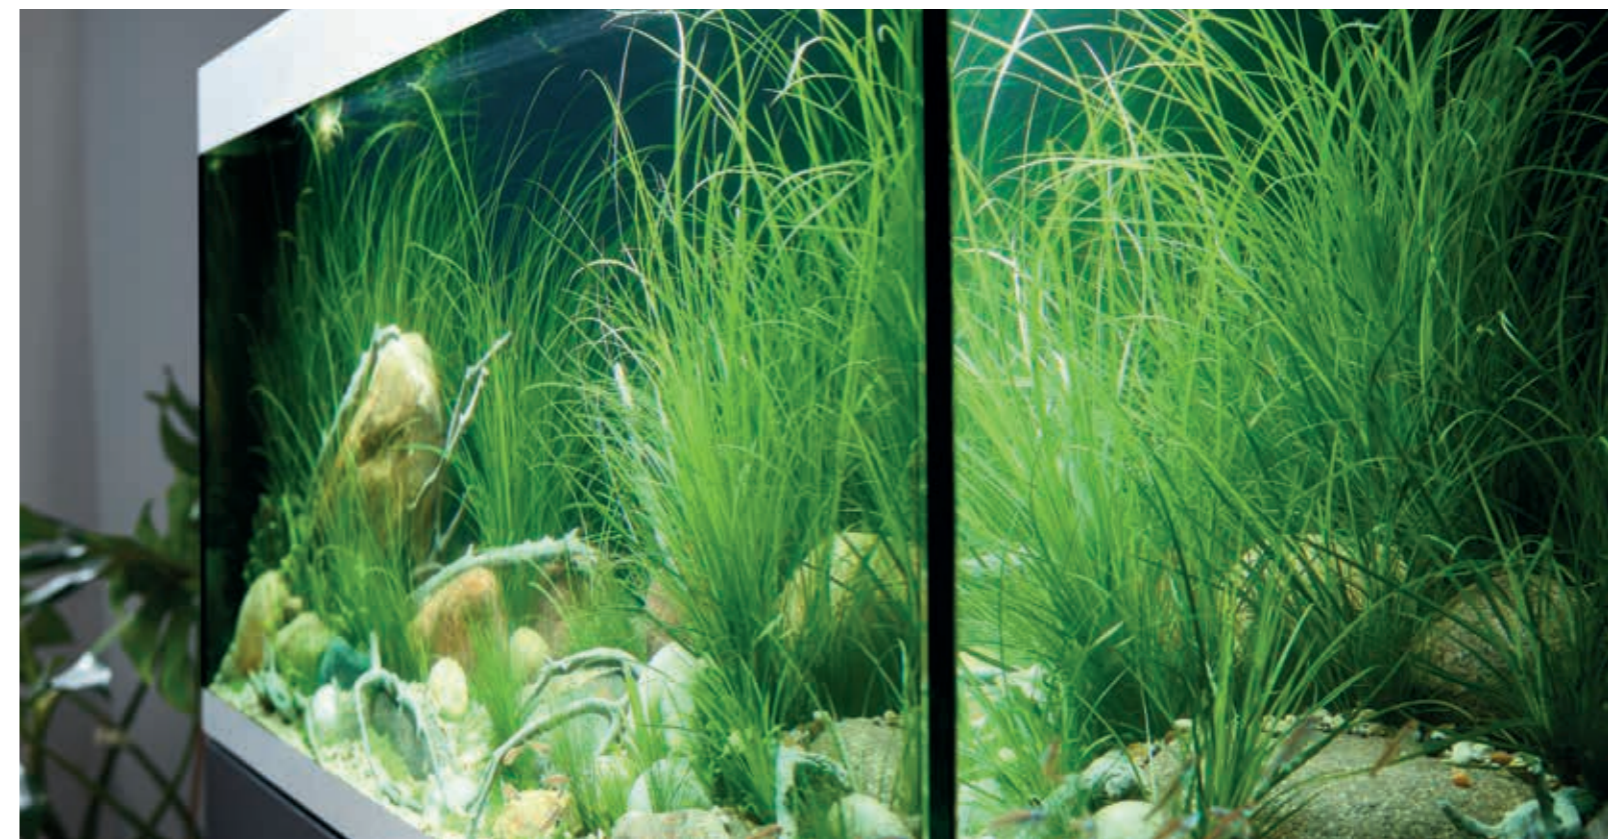

BioStyle

Modern design meets power



TWO-STAGE FILTRATION

Mechanical & biological cleaning



ADAPTABLE

Easy to install thanks to the flexible alignable spacer



QUIET

Pleasantly quiet in operation.



MAINTENANCE MADE EASY

An Indicator shows when it is time to clean or replace the filter cartridge



VARIABLE SPEEDS

Infinitely variable water flow rate



FLEXIBLE

Telescopic suction pipe



BioStyle 75



BioStyle 115




BioStyle 180

1



2

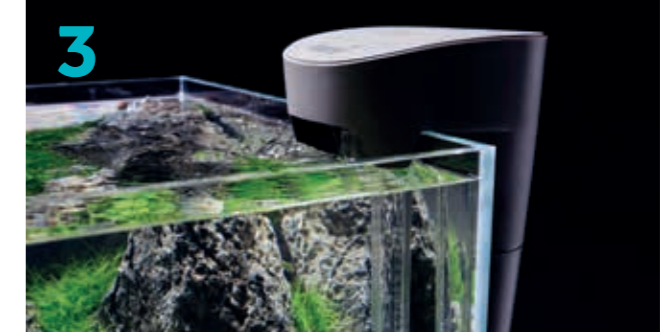

3

1. Two filter stages for optimal cleaning:

Biological and mechanical cleaning plus features that make maintenance so much easier, like the removable filter cartridge – these are just some of the benefits of the BioStyle hang-on filter.

2. Perfect fit:

The adjustable spacers ensure that the BioStyle hang-on filter fits perfectly into the aquarium. Furthermore, the transparent intake pipe is telescopic.

3. Perfect fit: Space-saving:

The BioStyle can be hung on aquariums up to glass thickness of 15 mm.

TECHNICAL DATA

Rated voltage	230 V / 50 Hz	
Power cable length	m	1.50
Guarantee *	Years	3
Suitable for freshwater	Yes	
Suitable for saltwater		

Product	Suitable for aquariums up to max. l	Dimensions (L x W x H) mm	Power consumption W	Net weight kg	Max. flow rate l/h	Filter volume l	Product Code
BioStyle 75 grey	70	154 x 156 x 212	3.5	0.80	350	1.1	08OA300
BioStyle 115 grey	115	154 x 230 x 212	4	1.02	550	1.9	08OA301
BioStyle 180 grey	180	154 x 304 x 212	4.5	1.27	900	2.7	08OA302

*Guarantee valid under the guarantee conditions from OASE.

BioPlus

Well concealed and convenient to clean



FULL POWER

The extra-high volume filter sponges ensure effective mechanical and biological filtration. For crystal-clear water, a fine, optional filter fleece also removes any remaining particles



ECONOMICAL & QUIET

Extremely quiet and energy-saving pump



OPTIONAL

Includes HeatUp integrated adjustable heater with BioPlus Thermo - can also be retrofitted with BioPlus



EASYCLEAN MECHANISM

Extra-easy cleaning: The compact filter unit can be removed easily while the pump unit remains in place



SPACE SAVING

Can be installed discreetly in a corner



DISCREET

Integrated outlet nozzles instead of an impractical outlet pipe. The nozzles produce a uniform surface movement and ensure optimal oxygen enrichment



1. Flexible:

Enjoy the flexibility of switching between outlet nozzles and a water outlet for an optimally coordinated surface movement.

2. Filter media:

Filter foam can be removed on a modular basis – ideal for time-delayed, bacteria-friendly cleaning.

3. Additional filter chamber:

E.g. for a fine filter (included in the scope of delivery).

TECHNICAL DATA

Rated voltage	230 V / 50 Hz	
Guarantee (+ request guarantee) *	Years	3 + 1
Suitable for freshwater	Yes	
Suitable for saltwater		

Product	Suitable for aquariums up to max. l	Dimensions (L x W x H) mm	Power consumption W	Optional Heater W	Power cable length m	Net weight kg	Max. flow rate l/h	Product Code
BioPlus 50	50	120 x 110 x 210	5	50	1.50	0.57	350	08OA030
BioPlus 100	100	120 x 110 x 270	6	100		0.65	500	08OA031
BioPlus 200	200	120 x 110 x 330	7	200		0.72	650	08OA032

*Guarantee valid under the guarantee conditions from OASE.

CrystalSkim

For a clean aquarium surface – removing biofilm, plant debris and other floating substances



IMPROVED GAS EXCHANGE

A thick biofilm makes gas exchange more difficult - with the CrystalSkim, this situation can be significantly improved for the good of all aquarium inhabitants



INNOVATIVE SURFACE SKIMMING

Our skimmer quickly and effectively frees the aquarium surface of the aquarium from floating substances such as plant remains and biofilm



LONG SERVICE INTERVALS

The floating ring ensures a long service life without having to refill water



HIGH SAFETY

A integrated collection basket ensures the safety of the aquarium inhabitants by making sure they can never get into the skimmer. This can also be removed if desired



CrystalSkim 350

CrystalSkim 600



AFTER PLANT TRIMMING

After aquarium plants are trimmed, the skimmer conveniently catches even the finest plant fragments, which are easy to miss with a net



ADJUSTABLE

The powerful motor is individually adjustable and ensures a crystal clear water surface at just the right output



COMPACT & DISCREET

The discreet, compact and modern design of the skimmer lets it fade into the background



1. Less refilling:

The floating ring adjusts to the water level. For more safety and cleanliness over a long period of time.

2. Firm hold:

Two practical suction holders fix the CrystalSkim securely to the pane and at the same time allow it to be removed quickly for maintenance. The fastening system is largely transparent and unobtrusive.

3. Variable currents:

The stepless adjustment of the water flow enables different flow strengths, which you can intuitively vary directly on the swim ring.

4. No way through:

Do you have particularly small inhabitants in your aquarium? The protective grille can simply be installed in the skimmer to protect smaller animals.

TECHNICAL DATA

Rated voltage	230 V / 50 Hz	
Power cable length	m	2.00
Guarantee *	Years	3
Suitable for freshwater	Yes	
Suitable for saltwater		

Product	Dimensions (Ø x H)	Power consumption	Net weight	Possible water level difference	Min. flow rate	Max. flow rate	Suitable for aquariums up to max.	Product Code
	mm	W	kg	cm	l/h	l/h	l	
CrystalSkim 350	36 x 116	4.5	0.29	2.5 cm	200	300	350	08OA070
CrystalSkim 600	49 x 170		0.34	3.5 cm	400	600	600	08OA071

*Guarantee valid under the guarantee conditions from OASE. Can be viewed at www.oase.com/guarantee

Cleaning Accessories

TECHNICAL DATA

Product	Product Code
Magnetic glass cleaner 5 mm	08OA074
Magnetic glass cleaner 10 mm	08OA075



TECHNICAL DATA

Product	Length mm	Net weight kg	Product Code
Aquarium glass cleaner	290	0.20	08OA076



TECHNICAL DATA

Product	Length mm	Net weight kg	Product details	Product Code
Gravel Cleaner E	48	0.47	The GravelCleaner E for cleaning the bottom of medium and large aquariums can be extended easily. The extra-long cleaning head has a triangular attachment for effective cleaning of large areas. A protective grid keeps aquarium animals from being sucked in and protects the 2 m long hose from blockages. With the stopcock, you can regulate the flow continuously and flexibly adjust the suction power of the bell.	08OA073
Gravel Cleaner R	-	0.30	The GravelCleaner R for cleaning the bottom of smaller aquariums can be extended. The round attachment with extension is optimal for spaces in between. A protective grid keeps the aquarium animals from being sucked in and protects the 2 m long hose from blockages. With the stopcock, you can regulate the flow continuously and flexibly adjust the suction power of the bell.	08OA072



TECHNICAL DATA

Product	Brush dimensions (L x D) mm	Length mm	Net weight kg	Product Code
Spiral brush	50 x 30	1500	0.06	08OA083



TECHNICAL DATA

Product	Length mm	Net weight kg	Product Code
Plant tweezers	165	0.05	08OA082
Plant scissors	255	0.10	08OA081



TECHNICAL DATA

Product	Dimensions (L x W) mm	Max. handle length cm	Net weight kg	Mesh size	Product Code
Fish net 8 cm	80 x 65	21	0.04	0.9 mm	08OA077
Fish net 10 cm	105 x 90	24	0.05		08OA078
Fish net 15 cm	160 x 130	32	0.09		08OA079
Fish net 20 cm	210 x 160	33	0.10		08OA080



Filter Accessories

FILTER SPONGES/FILTERMEDIA BIOMASTER

Product	Suitable for	Product Code	
Foam BioMaster 20ppi Blue	BioMaster 250, BioMaster 350, BioMaster 600, BioMaster 850, BioMaster Thermo 250, BioMaster Thermo 350, BioMaster Thermo 600, BioMaster Thermo 850	11OA009	
Foam BioMaster 30ppi Orange		11OA010	
Prefilterfoam set 4 BioMaster 30ppi		11OA011	
Prefilterfoam set 4 BioMaster 45ppi		11OA005	
Prefilterfoam set 4 BioMaster 60ppi		11OA006	
Prefilterfoam set 6 BioMaster 30ppi		11OA012	
Prefilterfoam set 6 BioMaster 45ppi		11OA007	
Prefilterfoam set 6 BioMaster 60ppi		11OA008	
Hel-X 13 Biomedica 800ml		11OA019	
Carbon prefilter foam set 4 BioMaster		11OA013	
Carbon prefilter foam set 6 BioMaster		11OA014	

FILTER SPONGES/FILTERMEDIA FILTOSMART

Product	Suitable for	Product Code	
Filter foam set FiltoSmart 60	FiltoSmart 60	11OA001	
Filter foam set FiltoSmart 100	FiltoSmart 100, FiltoSmart Thermo 100	11OA002	
Filter foam set FiltoSmart 200	FiltoSmart 200, FiltoSmart Thermo 200	11OA003	
Filter foam set FiltoSmart 300	FiltoSmart 300, FiltoSmart Thermo 300	11OA004	
Ceramic filter media 420 g	FiltoSmart 60, FiltoSmart 100, FiltoSmart 200, FiltoSmart 300, FiltoSmart Thermo 100, FiltoSmart Thermo 200, FiltoSmart Thermo 300	11OA020	
Carbon filter media 2 x 130 g	BioCompact 25, FiltoSmart 100, FiltoSmart 200, FiltoSmart 300, FiltoSmart Thermo 100, FiltoSmart Thermo 200, FiltoSmart Thermo 300	11OA021	

Filter Accessories

FILTER SPONGES BIOPLUS

Product	Suitable for	Product Code	
Filter foam BioPlus 30 ppi	BioPlus 50, BioPlus 100, BioPlus 200, BioPlus Thermo 50, BioPlus Thermo 100, BioPlus Thermo 200	11OA017	
Filter fleece set BioPlus white		11OA016	
Filter foam BioPlus 20ppi blue		11OA015	
Carbon filter foam Set 4 BioPlus		11OA018	

FILTER SPONGES/FILTERMEDIA BIOSTYLE

Product	Suitable for	Product Code	
Filter foam Set 2 BioStyle 30 ppi	BioStyle 75, BioStyle 115, BioStyle 180	08OA063	
Filter foam Set 4 BioStyle 30 ppi		08OA064	
Disposable cartridge Set 2 BioStyle		08OA065	
Disposable cartridge Set 4 BioStyle		08OA066	
Carbon cartridge Booster BioStyle		08OA067	
Phosphate-binder cartridge Booster BioStyle		08OA068	
Cartridge Booster BioStyle		08OA069	



We create the
right flow.



HighLine Classic LED

Presented in the right light



ENERGY EFFICIENT

Modern LED technology with energy efficiency class E



NATURAL AMBIENCE

Daylight spectrum adapted to animals and plants with natural-looking colour rendering



OPTIMAL LIGHTING

A colour spectrum for natural-looking sunlight simulation creates the best conditions for healthy plant growth (6500 kelvin)




PRACTICAL

Switch on and off via toggle switch on cable



DURABLE & SAFE


Extremely high quality 100% waterproof installation in a glass tube (IP68) to protect the LEDs

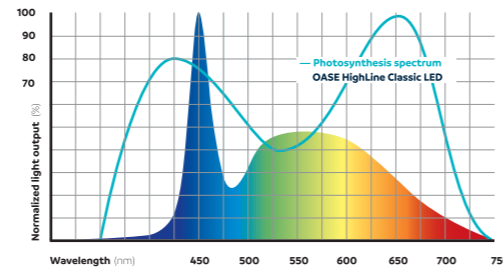

TECHNICAL DATA

Energy efficiency class light fixture ¹⁾	E
Protection class	IP 68
Rated voltage	220 – 240 V / 50/60 Hz
Power cable length	m 1.80
Guarantee ²⁾	Years 2
Bulb type	LED
Light colour	Daylight white
Colour temperature	K 6500
Beam angle	60 degrees

ACCESSORIES

Description	Product details	Product Code
Adaptor for HighLine Classic Light	Universal adapter for T5 and T8 LED lamps For integrating Classic LEDs into covers with fluorescent tube technology Can be used for all conventional LEDs	110A067 

Product	Lamp power consumption	Weighted energy consumption per lamp	Dimensions (Ø x H)	Net weight	Suitable for	Number of individual LEDs	Luminous flux	Product Code
	W	kWh/1000h	mm	kg		Units	lm	
HighLine Classic LED daylight 40	8	8	24 x 400	0.30	HighLine 125, HighLine optiwhite 125	42	900	080A087
HighLine Classic LED daylight 60	12	12	24 x 600	0.40	HighLine 175, HighLine optiwhite 175		1300	080A088
HighLine Classic LED daylight 70	16	16	24 x 700		HighLine 200, HighLine optiwhite 200	45	1650	080A084
HighLine Classic LED daylight 100	18	18	24 x 1015	0.60	HighLine 300, HighLine optiwhite 300		1820	080A085
HighLine Classic LED daylight 120	28	28	24 x 1200	0.70	HighLine 400, HighLine optiwhite 400	90	2950	080A086

¹⁾Guarantee valid under the guarantee conditions from OASE.
²⁾This lamp contains built-in LED bulbs. The bulbs in the lamp cannot be replaced.



HeatUp

Reliable temperature

+ **PRECISE**
The patented** control system allows precise temperature adjustment (+/-3°C)

+ **SENSITIVE**
Consistent temperature level thanks to patented bi-metal technology

+ **INSTALLATION SITE**
Ideal for submerged use

+ **QUARTZ GLASS**
Especially temperature resistant



+ **ADJUSTABLE**
Practical heating function indicated by activated indicator light

+ **EASY INSTALLATION**
Bracket included

+ **ROBUST**
High-quality workmanship for continuous use



TECHNICAL DATA

Rated voltage	230 V / 50 Hz
Power cable length	m 1.50
Guarantee	Years 3
Suitable for freshwater	Yes
Suitable for saltwater	

Product	Dimensions (Ø x H) mm	Power consumption W	Net weight kg	Product Code
HeatUp 50	23 x 205	50	0.20	080A050
HeatUp 100	23 x 245	100	0.22	080A051
HeatUp 150	23 x 315	150	0.25	080A052
HeatUp 200		200	0.25	080A053
HeatUp 300	23 x 370	300	0.28	080A054
HeatUp 400	23 x 440	400	0.34	080A055

**Patent granted in Germany, France, Great Britain, Italy and USA

Digital Thermometer

Ideal temperature at all times



FEATURES

With the digital thermometer, the temperature in the aquarium can be conveniently read at any time. The 6 cm wide thermometer can simply be glued to the outside of the aquarium wall.

It measures the water temperature very accurately and is easy to read thanks to the large digital display.

TECHNICAL DATA

Product	Dimensions (L x W x H) mm	Net weight kg	Product Code
Digital thermometer	60 x 18 x 48	0.03	080A060



Water is
our element.



OptiMax

Strong above and below water

+ POWERFUL & ECONOMICAL

Excellent energy balance: low power consumption with high pump output



+ INSTALLATION SITE

For installation under water within the aquarium or in dry conditions

+ RELIABLE

Extremely powerful and reliable in continuous use

+ ADJUSTABLE

The water flow rate can be easily and continuously adjusted

+ EASY TO MOUNT

Two practical suction holders for mounting at the desired location

TECHNICAL DATA

Rated voltage	230 V / 50 Hz
Power cable length	m 1.50
Guarantee	Years 3
Pressure-side connection	-
Pressure-side connection	mm 17
Suitable for freshwater	Yes
Suitable for saltwater	
Setup type	Can be set up underwater & dry installed

Product	Dimensions (L x W x H)	Power consumption	Net weight	Max. flow rate	Max. head height, metres	Suction-side connection	Suction-side connection	Product Code
	mm	W	kg	l/h	m		mm	
OptiMax 1000	77 x 52 x 80	12	0.37	1000	1.30	-	19	080A002
OptiMax 3000	140 x 95 x 136	55	1.23	2800	3.00	G 1"	17	080A003
OptiMax 5000		82	1.22	5000				080A004

*Guarantee valid under the guarantee conditions from OASE.

OptiMax

Small but powerful

+ COMPACT

The OptiMax 300 is particularly space-saving and easy to conceal

+ EFFICIENT

High pump capacity in a compact size

+ MOVEMENT

Perfect for efficient water circulation or for the operation of an aquarium filter



+ INSTALLATION SITE

For installation under water, within the aquarium

+ EASY TO MOUNT

Two practical suction holders for mounting at the desired location

+ EASY TO ADJUST

The water flow rate can be easily adjusted

TECHNICAL DATA

Dimensions (L x W x H)	mm 55 x 42 x 60
Rated voltage	230 V / 50 Hz
Power consumption	W 5
Power cable length	m 1.50
Net weight	kg 0.18 / 0.21
Guarantee	Years 3
Pressure-side connection	mm 13
Suction-side connection	mm -
Suitable for freshwater	Yes
Suitable for saltwater	
Setup type	Underwater installation only

Product	Max. flow rate	Max. head height, metres	Product Code
	l/h	m	
OptiMax 300	300	0.60	080A001
OptiMax 500	500	0.80	080A007

*Guarantee valid under the guarantee conditions from OASE.



OxyMax

Oxygen for aquarium inhabitants and plants



INDIVIDUALITY

The pattern of bubbles can be adjusted on the air vent



FLEXIBLE

Standing or hanging installation possible, especially space-saving and easy to control



QUIET

Pleasantly low level of operating noise



OxyMax 200



INFINITELY ADJUSTABLE

The amount of air released can be easily adjusted



RELIABLE

Constant oxygen supply



UP AND RUNNING IN NO TIME

Complete set for quick connection, including hose and air vent

TECHNICAL DATA

Dimensions (L x W x H)	mm	150 x 90 x 70
Rated voltage		230 V / 50 Hz
Power cable length	m	1.60
Guarantee	Years	3
Connection for hoses ø (inner/outer)		4 / 6 mm
Protection class		IP X4
Suitable for freshwater		Yes
Suitable for saltwater		



OxyMax 100



OxyMax 400

Product	Power consumption W	Power cable length m	Net weight kg	Max. flow rate l/h	Hose (quantity/ length)	Product Code
OxyMax 100	3.5	1.60	0.66	100	1 UNIT/2 m	08OA040
OxyMax 200			0.74	200	2 UNITS/2 m	08OA041
OxyMax 400	4			360		08OA042

*Guarantee valid under the guarantee conditions from OASE.



FishGuard

Optimum supply 24 hours a day



SUITABLE FOR ALL

Suitable for freshwater and saltwater tanks and terrariums



OPTIMUM PROTECTION

A sophisticated mechanism with a special seal protects the food against moisture



12 PROGRAMMABLE FEED LOADS

Perfect for large aquariums with lots of fish. Programme up to four feeds a day with a maximum of three doses per feed



STRAIGHT FORWARD

Especially easy to program thanks to clear LCD display




FLEXIBLE MOUNTING

Optional bracket available for mounting on the glass edge for open aquariums or terrariums

ACCESSORIES

Description	Product details	Product Code
Bracket FishGuard	The FishGuard bracket is an optional addition to the automatic feeder. In open aquariums or terrariums, the feeder can be easily attached to the outside wall.	080A062

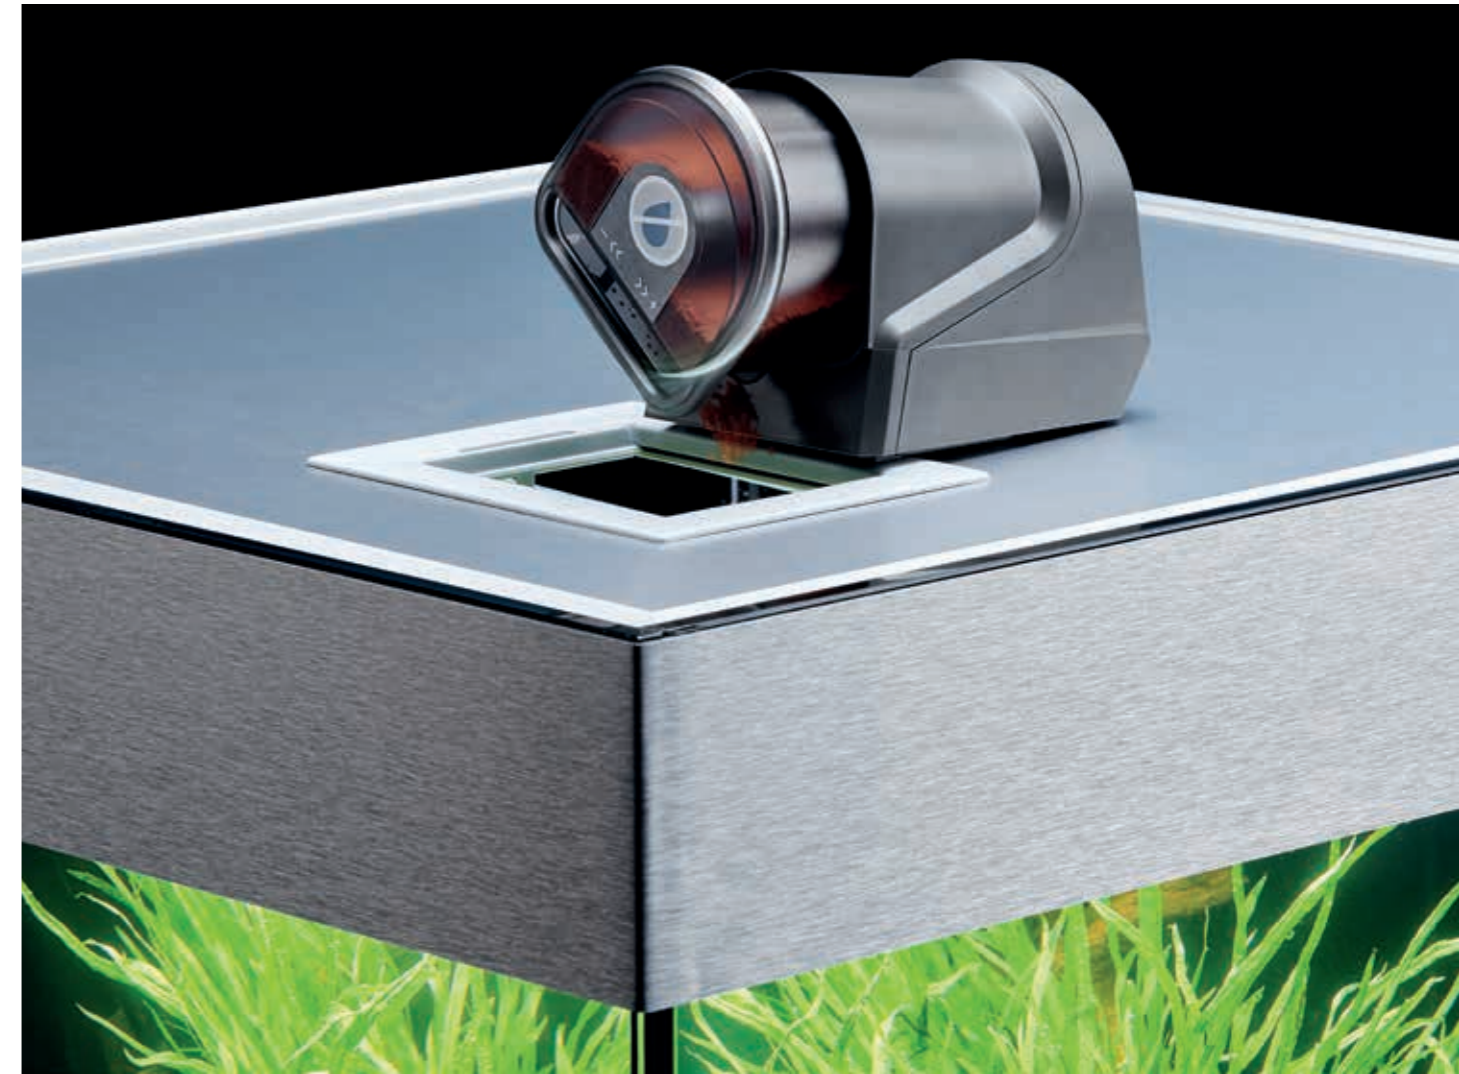


TECHNICAL DATA

Product	FishGuard	Product Code
Dimensions (L x W x H)	mm 120 x 78 x 93	080A061
Battery (not included)	4 x 1.5 V AA	
Net weight	kg 0.20	
Guarantee *	Years 3	
Suitable for food content up to max.	cm ³ 125	
Suitable for freshwater	Yes	
Suitable for saltwater		


*Guarantee valid under the guarantee conditions from OASE.

CRITERIA FOR SELECTING THE RIGHT AQUARIUM

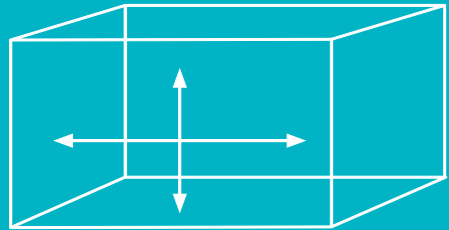

Size

In general, the larger the better, because larger aquariums create better living conditions for aquarium inhabitants and plants. This makes it easier to maintain the biological balance in the aquarium.

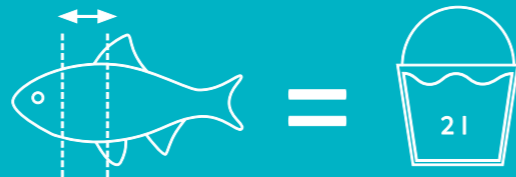

Fish Stock

The following general guideline applies: provide two litres of water for every one centimetre of fish length. Be sure to ask your specialist dealer for advice when choosing the size of your aquarium, inhabitants and plants – you can only create a well-functioning habitat with healthy inhabitants that you can enjoy for a long time to come if all factors are perfectly coordinated.



Weight

Do not underestimate the weight of a filled, planted aquarium. The load-bearing capacity of the floor is the most important aspect when choosing the location. You can calculate the weight of the water in the aquarium as follows: height x width x depth in cm/1000. You must also add the weight of the glass aquarium, the furnishings and the technology.



Location

It is important to avoid direct sunlight as this promotes the growth of algae in the aquarium. In addition, the less the aquarium inhabitants are exposed to vibrations and disturbances caused by doors opening and closing or people walking past, the better. The best location is a corner of the room where you have a good view of your underwater world. You should also keep the aquarium away from heat sources to prevent the aquarium from being exposed to fluctuating temperatures.

