



Aquadis+ Hot Water

Accurate billing for sub metering application

Aquadis+ volumetric water meter is especially designed to provide reliable and accurate measurement in hot water up to 90 C.

The most typical application is in collective housing where the accurate individual billing with Aquadis+ allow to properly control and account the global building consumption.

FEATURES AND BENEFITS

- » Accurate and Efficient
- » Any installation position
- » Compact and Silent
- » Pre-equipped for Communication

Accurate



Aquadis+ has starting flow value < 3 l/h allowing the detection of drop to drop condition, representing 25 m³ of not invoiced water par year. It is capable to measure

at 12 l/h inside the metrology channel, reducing the not accounted water amount that could represent even 80 m³ par year in case of use of not appropriated water meters. demands are accurately monitored initially and over time.

Easy to Use


Aquadis+ can be installed in horizontal or vertical position without effect on accuracy and thanks to the magnetic transmission, it is possible to rotate the register for a better reading comfort. The clear and wide 8 rollers facilitate the reading and the visual leakages detection. An internal wiper prevent any condensation problems to always guarantee a simple reading.

Communication Device

Aquadis+ is always pre-equipped with the proven Cyble technology, making it possible to mount plug-and-play Cyble modules at any time in the field without replacing any component of the meter. This opens up to a large range of advanced and reliable AMR systems. Please refer to specific leaflet about Itron AMR complete portfolio.

Technology Highlights

- » *Innovative Hydro-dynamically balanced piston (patented, derivate from Cold Water version) enables the detection and account of extremely low flows and reduce wear effects.*



- » Extra dry register preserves the rotating wheels and rollers from water exposure reducing wear and tears.
- » Strong and stable magnetic transmission not sensitive to external tampering.
- » Special materials has been chosen for the measuring chamber to keep the excellent performance even at very high water temperature.

Approvals and Standards

Aquadis+ Hot Water is approved for Q3=1,6 and Q3=2,5 m³/h from Ratio 50 to 160 according with:

- » MID, directive 2004/22/EC
- » European Std EN 14154 - 2005
- » International Standard ISO 4064 – 2005 and complaints with OIML R49 recommendations.

Aquadis+ is compliant with regulations for products to use in contact with water intended for human consumption, granted by the following laboratories:

- » ACS (France)
- » LOCT (Italy)

Options

- » Non return-valve for outlet pipe
- » Removable cap for repairing
- » Register with optical detection principle (CC4)
- » Customer log on the cap

Technical Specifications

Nominal Diameter	mm	15	20
MID Type Approval Number		LNE 16946	
MID Dynamic Range (R) - all positions		160 (*)	
Nominal flow rate (Q3)	m ³ /h	1.6	2.5
Standard Ratio * (Q3/Q1)		100	160
Minimum Flow Rate (Q1)	l/h	16	15.6
Transitional Flow Rate (Q2)	l/h	25.6	25
Overload Flow Rate (Q4)	m ³ /h	2	3.125
Typical Starting Flow Rate	l/h	≤ 3	
Pressure Loss Class at Q3	bar	0.25	0.63
Maximum Admissible Pressure (MAP)	bar	16	
Testing Pressure	bar	25	
Max Operating Temperature (MAT)	°C	30 - 90	
Climatic Environment Range	°C	5 - 55	
Minimum Scale Interval	L	0.02	
Indication Range	m ³	99999.999	

* Other Ratios available under specific request




AnyQuest radio frequency module fitted on the meter.



Version with CC4 register

TYPICAL ACCURACY CURVE

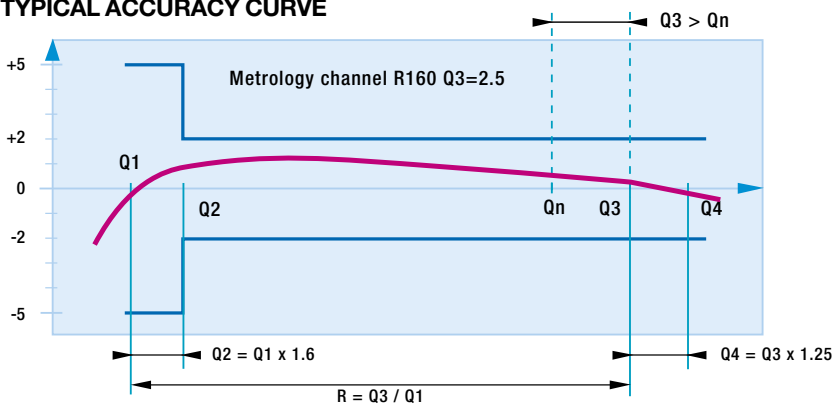


The dynamic range is defined as the Ratio (R) between the nominal and the minimum flowrate. The MID approval proves the Aquadis+ HW real capacity to withstands to higher nominal flows (Q3 > Qn).

DIMENSIONS AND WEIGHT

Nominal diameter (DN)	mm	15	20
	inches	1/2"	3/4"
Meter Thread	inches	3/4" G	1" G
	mm	20 x 27	20 x 27
Length* A	mm	105 110 170	130 190
Standard Ratio *	Kg	0.75 - 0.93	

* Other Ratios available under specific request

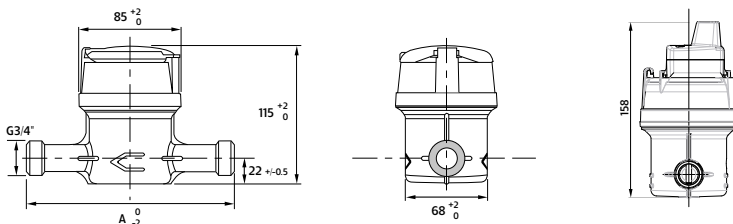

JSG Metering Solutions LTD

Unit 11, Totman Close, Brook Road Industrial Estate, Rayleigh, Essex, SS6 7UZ

Telephone: 01268 773766 - www.jsgsolutions.co.uk - sales@jsgsolutions.co.uk

While Itron strives to make the content of its marketing materials as timely and accurate as possible, Itron makes no claims, promises, or guarantees about the accuracy, completeness, or adequacy of, and expressly disclaims liability for errors and omissions in, such materials. No warranty of any kind, implied, expressed, or statutory, including but not limited to the warranties of non-infringement of third party rights, title, merchantability, and fitness for a particular purpose, is given with respect to the content of these marketing materials. © Copyright 2022 Itron. All rights reserved. **WA-0069.2-EN-04.22**



ITRON WATER METERING

9, rue Ampère
71031 Mâcon cedex
France

Phone: +33 3 85 29 39 00
Fax: +33 3 85 29 38 58