

WARRANTY

Thank You!

for purchasing this Westcott® product.

Register your purchase.

We have a simple form for registering your Westcott purchase that provides you with added assurance for your gear: fjwestcott.com/warranty

Visit fjwestcott.com

- ✔ Video Tips
- ✔ Product Support
- ✔ Knowledge Base
- ✔ Product Reviews
- ✔ Contests & More!

One year against manufacturer defect.

Westcott's warranty obligations for this product are limited to the terms set forth below: The F.J. Westcott Co. ("Westcott") warrants this Westcott branded product against defects in materials and workmanship under normal use for a period of ONE (1) YEAR from the date of retail purchase by the original end-user purchaser ("Warranty Period"). If a defect arises and a valid claim is received within the Warranty Period, at its option and to the extent permitted by law, Westcott will either (1) repair the defect at no charge, using new or refurbished replacement parts, or (2) exchange the product with a product that is new or which has been manufactured from new or serviceable used parts and is at least functionally equivalent to the original product. This Limited Warranty applies only to products manufactured by or for Westcott that can be identified by the "Westcott" trademark, trade name, or logo affixed to them.

This warranty does not apply: (a) to damage caused by accident, abuse, misuse, flood, fire, earthquake or other external causes; (b) to damage caused by operating the product outside the permitted or intended uses described by Westcott; (c) to a product or part that has been modified to alter functionality or capability without the written permission of Westcott.; or (d) to cosmetic damage, including but not limited to scratches, dents and broken plastic.

Please contact Westcott's Repair Department for a Return Authorization Number "RMA" prior to requesting warranty service. This RMA must be clearly written on the outside of the box to the left of the shipping label. Items sent in without pre-authorization or that do not fall under the ONE (1) YEAR limited warranty will be returned at the expense of the sender.

Register this product at FJWESTCOTT.COM/WARRANTY

Repair Dept.: **800-886-1689** / 419-243-7311 (International)

E-Mail: INFO@FJWESTCOTT.COM SUBJECT: ATTN: REPAIR DEPT.

Shipping: F.J. Westcott Co, 1425 Holland Rd, Maumee, OH 43537

©F.J. WESTCOTT CO. ALL RIGHTS RESERVED. AU0315

ZEPPELIN™

Mounting Arm with Built-in Grip

QUICK START GUIDE



©TERRY WHITE

 **westcott®**


SETUP & USAGE

The Zeppelin Mounting Arm includes a 42" steel mounting arm and two removable mounting blocks. Assembling this unit requires:

- Zeppelin Deep Parabolic Softbox (#3730, #3731, or #3732)
- Zeppelin Mounting Bracket (#3740, #3741, #3742, or #3743)
- Zeppelin Deflector Plate (#3730-DP)
- #3500-Series Speedring
- Light Stand
- Phillips Head Screwdriver


SETUP

To begin, locate your Zeppelin Mounting Bracket. Remove the top center screw from this bracket and place the screw in a secure location for future use.



Assemble your Zeppelin Deep Parabolic Softbox to the Zeppelin Mounting Bracket and mount the assembled unit to your preferred light stand. Refrain from placing the Zeppelin's rear collar onto the unit until arm mounting is complete.

Locate the U-shaped mounting block attached to the Zeppelin Mounting Arm. Remove the lower thumb screw from the knob holder. Place the mounting block over the open threading of the Zeppelin Mounting Bracket where the screw was removed. Place the thumb screw

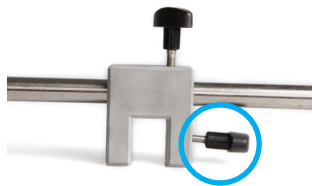

through the screw receptacle and tighten into the speedring until it's securely attached.

Please note, this thumb screw should be located toward the rear of the Zeppelin Mounting Bracket.



Remove a single screw from your 3500-series speedring. Place this screw in a secure location for future use.




Locate the remaining mounting block attached to the Zeppelin Mounting Arm. Remove the lower thumb screw attached to this block. Place this mounting block over the open threading of your 3500-series speedring where screw was removed. Place the block's thumb screw through the threading on the front of the speedring and into the mounting block. Tighten to secure.

Please note, this thumb screw should be located toward the front of the 3500-series speedring.




To complete setup, attach the Deflector Plate to the Mounting Bracket, mount your preferred light head securely to the 3500-series speedring, and attach the Zeppelin's rear collar.

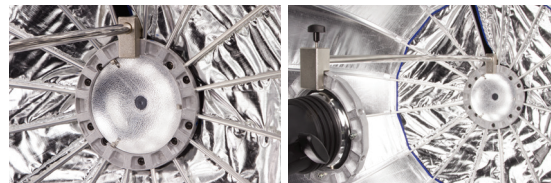

To adjust your light head's depth within the box, simply loosen the top thumb screw on the Zeppelin Arm's U-shaped bracket and use the Zeppelin Arm's rear hand grip to move unit.

Tighten the screw to secure the unit after your light head is in your desired position.

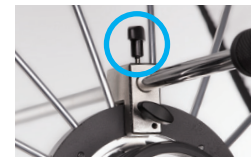

TO VIEW AN INSTRUCTIONAL VIDEO AND MORE, VISIT FJWESTCOTT.COM/ZEPPELIN-ARM



CAUTION

Failing to tightly secure screws and thumb screws during assembly could result in damage to the Zeppelin Mounting Arm, Zeppelin Deep Parabolic, speedrings, and/or your light source.