



International Filter Products

Revolutionary systems for your industry


CRT-PP Series Polypropylene Filter Cartridge

The CRT-PP Food Grade filter cartridge embodies advanced filtration technology, delivering an absolute efficiency rating of 99.98% for precise particle retention essential in food processing. Its superior chemical compatibility and robust structural design ensure prolonged durability and consistent performance in various food applications. Each cartridge is meticulously pre-flushed with food-grade water and undergoes rigorous 100% integrity testing to meet the high standards of the food industry. Crafted without animal-derived materials, the CRT-PP Food Grade cartridge presents an eco-friendly and cost-effective alternative to conventional filtration methods like lenticular filters and cellulose sheets.

Application

- Beverage Production
- Fats and Waxes
- Liquid Sweeteners
- Brewing and Wine
- Product Sterilization
- Food Grade Chemicals
- Proteins
- Water Purification
- Fermentation Broths
- Edible Oils Emulsions
- Flavor and Fragrance Extraction
- Serums

Part Number: CRT-PP-10-XXX-X6S / CRT-PP-10-XXX-X6S-5

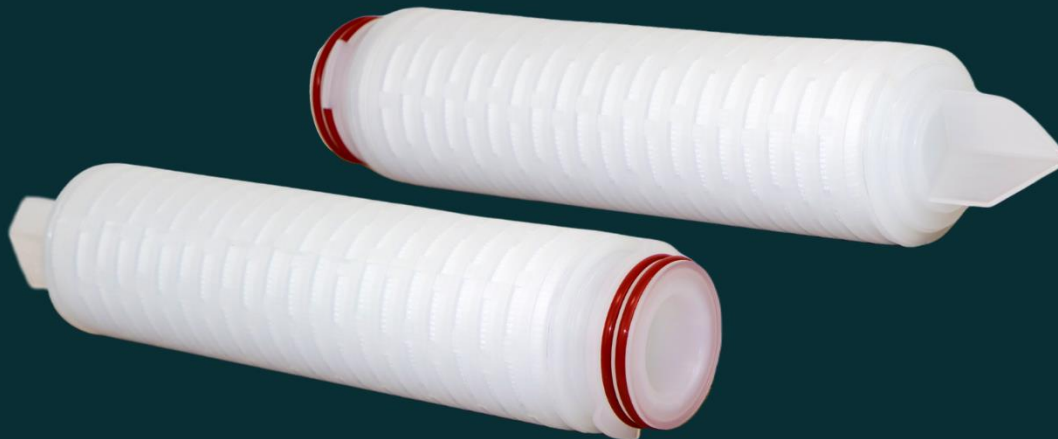

**CRT-PP Series PP Cartridge - Food Grade
226 O-Rings with Fin**



International Filter Products
Revolutionary systems for your industry



7914 Ajay Drive, Sun Valley, CA 91352
www.internationalfilterproducts.com
sales@internationalfilterproducts.com
Phone: (818) 504-8115



International Filter Products

Revolutionary systems for your industry

Technical Data Sheet

Micron Rating:

- 0.10 μm
- 0.20 μm
- 0.45 μm
- 0.65 μm
- 0.80 μm
- 1.0 μm
- 3.0 μm
- 5.0 μm
- 10.0 μm
- 15.0 μm
- 25.0 μm
- 50.0 μm

Effective Filtration Area:

- 5-Inch; 3.75 ft^2 (0.35 m^2)
- 10-Inch; 7.5 ft^2 (0.7 m^2)
- 20-Inch; 15.0 ft^2 (1.4 m^2)
- 30-Inch; 22.5 ft^2 (2.1 m^2)

Materials of Construction:

Media: Polypropylene (PP) Media Chemical Grade

Membrane Feature: Flushed with ultrapure DI water, High Flow Rate

Media Supports: Polypropylene

Shell, Cage, Core, End Caps: Polypropylene

O-Rings: Silicone (Standard)

Sealing: Thermally Bonded

Operating Conditions:

Maximum Forward Differential Pressure: **Liquid:** 5.5 bar (80psi) at 77°F/25°C

Gas: 4.1 bar (60psi) at 77°F/25°C

Minimum Burst Pressure: 8.3 bar (120psi) at 77°F/25°C

Maximum Reverse Differential Pressure: 3.0 bar (44psi) at 68°F/20°C

Maximum Operating Temperature: 176°F/80°C at 0.7 bar (10psi)

[Contact International Filter Products for high-temperature application above 122°F/50°C operating temperature]






International Filter Products


Revolutionary systems for your industry

Nominal Dimension:

Part Number: CRT-PP-05-XXX-X6X / CRT-PP-05-XXX-X6X-5

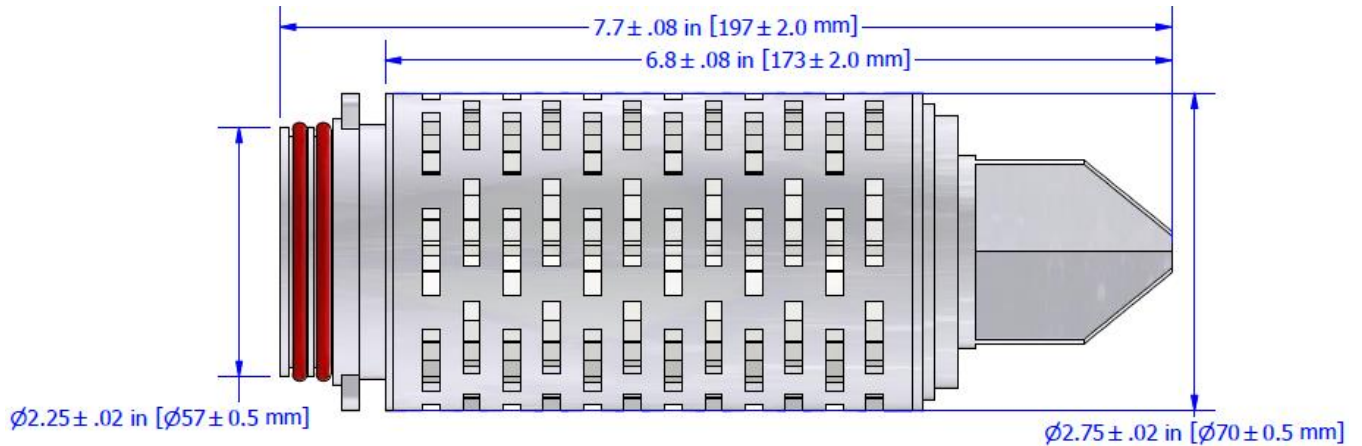

Part Number: CRT-PP-10-XXX-X6X / CRT-PP-10-XXX-X6X-5

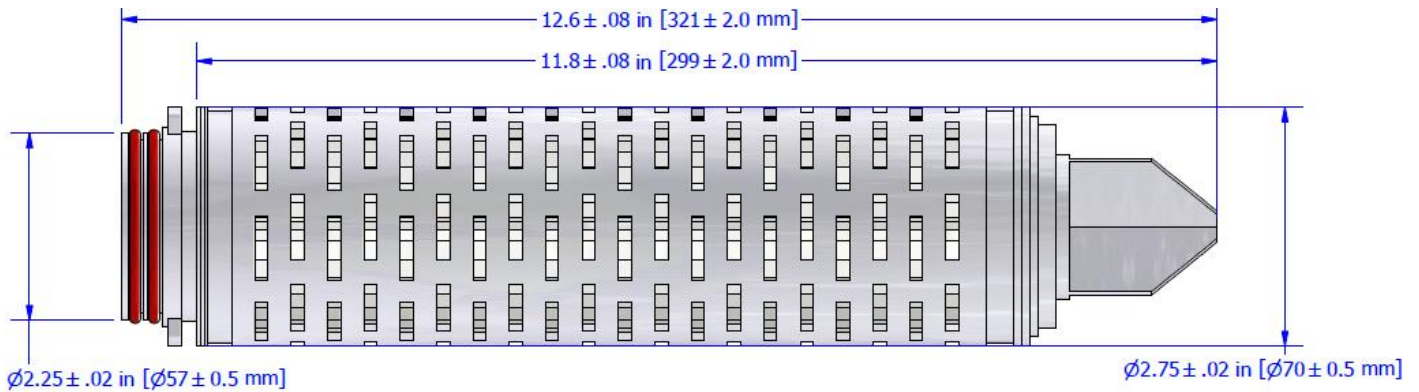

International Filter Products
Revolutionary systems for your industry




7914 Ajay Drive, Sun Valley, CA 91352
www.internationalfilterproducts.com
sales@internationalfilterproducts.com
Phone: (818) 504-8115




International Filter Products

Revolutionary systems for your industry

Part Number: CRT-PP-20-XXX-X6X / CRT-PP-20-XXX-X6X-5

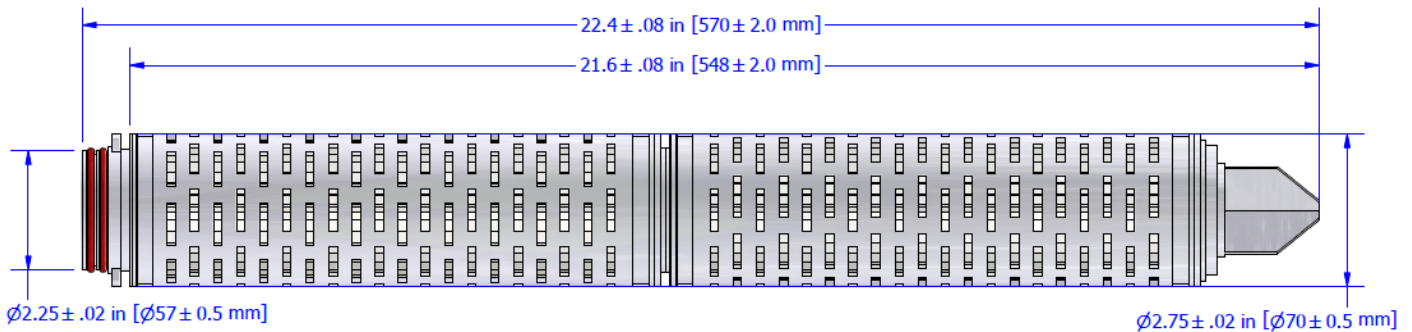

Part Number: CRT-PP-30-XXX-X6X / CRT-PP-30-XXX-X6X-5

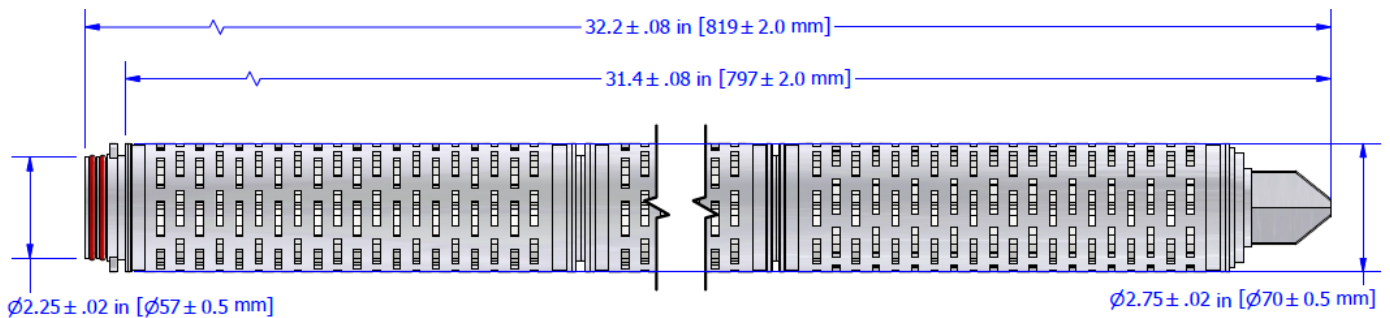

Typical Filtered Volume:

- 5-Inch; 50L-250L
- 10-Inch; 100L-500L
- 20-Inch; 200L- 1,000L
- 30-Inch; 300L-1,500L



International Filter Products
Revolutionary systems for your industry



7914 Ajay Drive, Sun Valley, CA 91352
www.internationalfilterproducts.com
sales@internationalfilterproducts.com
Phone: (818) 504-8115



International Filter Products

Revolutionary systems for your industry

Performance Attributes:

Water flow rates		
Micron rating	gpm/psid	Lpm/100mbar
0.10 µm	0.9	4.94
0.20 µm	1.85	10
0.45 µm	2.4	13
0.65 µm	4.4	28
0.80 µm	4.7	26
1.0 µm	8	45
3.0 µm	24	135
5.0 µm	40	225
10.0 µm	80	450
15.0 µm	120	675
25.0 µm	200	1,125
50.0 µm	400	2,250

Biocompatibility:

- ASTM F756-17 Hemolysis
- USP <88> (USP Class VI Plastics) Biological Reactivity Tests, In Vivo
- USP <87> / ISO 10993-5, In Vitro Cytotoxicity
- 21 CFR 177 FDA Indirect Food Additive



International Filter Products
Revolutionary systems for your industry



7914 Ajay Drive, Sun Valley, CA 91352
www.internationalfilterproducts.com
sales@internationalfilterproducts.com
Phone: (818) 504-8115



International Filter Products

Revolutionary systems for your industry

Sterilization:

Autoclave: The filters can be sterilized by autoclaving for up to 50 cycles at 125 °C (257 °F) for 30 minutes.

Steam-In-Place: The filters can also be sterilized by steam-in-place procedure up to 30 cycles at 135 °C (275 °F) for 30 minutes at less than 0.3 bar differential pressure.

Sanitization: The filters can also be sanitized by hot water or common chemicals that are compatible with filter components.

Animal-derived Components:

No animal-derived material is intentionally added or used during the manufacture of IFP CRT-PP cartridges.

Human and Veterinarian Use:

The product is safe for Human and Veterinarian use. CGMP CFR part 210 & 211, additional requirement of 21 CFR part 600 and 21 CFR part 680 are applicable to the aseptic manufacturing process.

RoHS:

Restriction of Hazardous Substances (RoHS 3) Directive 2015/863

REACH:

REACH (Registration, Evaluation, Authorization and Restriction of Chemicals) Article 57, Regulation No. 1907/2006)

Traceability:

For traceability and easy identification:

- A Certificate of Conformance is provided with each capsule.
- Each filter bag and box are labeled with the product part number, lot number, and identifying characteristics.

Each capsule is engraved and labeled with the product part number, lot number, and identifying characteristics.

Shelf Life:

The CRT-PP Food Grade cartridges have a shelf life of 5 years from the date of manufacture.



International Filter Products
Revolutionary systems for your industry



7914 Ajay Drive, Sun Valley, CA 91352
www.internationalfilterproducts.com
sales@internationalfilterproducts.com
Phone: (818) 504-8115




International Filter Products

Revolutionary systems for your industry

CRT-PP Series PP Cartridge

(Food Grade)

Ordering Guide

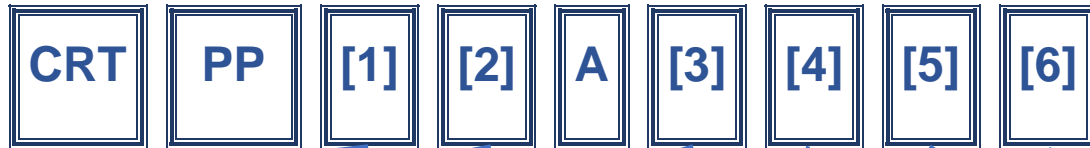

[1]	[2]	[3]	[4]	[5]	[6]
Length	Micron Rating	End Modification	O-Ring / Gasket Material	Optional	Grade
<ul style="list-style-type: none"> • 10 : 10-Inch • 20 : 20-Inch • 30 : 30-Inch • 40 : 40-Inch • 05 : 5-Inch 	<ul style="list-style-type: none"> • 001 : 0.10 µm • 002 : 0.20 µm • 004 : 0.45 µm • 006 : 0.65 µm • 008 : 0.80 µm • 010 : 1.0 µm • 030 : 3.0 µm • 050 : 5.0 µm • 100 : 10.0 µm • 150 : 15.0 µm • 250 : 25.0 µm • 500 : 50.0 µm <p>Note: All final membranes are sterilizing grade.</p>	<ul style="list-style-type: none"> • 2 : 222 O-Ring Flat • 6 : 226 O-Ring Fin • 7 : 226 O-Ring Flat • 0: DOE Flat Gasket 	<ul style="list-style-type: none"> • S : Silicone • E : EPDM • N : Buna-N • PV : Teflon Encapsulated Viton • PS : Teflon Encapsulated Silicone • V : Viton 	<ul style="list-style-type: none"> • -5 : Stainless Steel Insert 	<ul style="list-style-type: none"> • -F: Food Grade

Example:

CRTPP10002A6S-F

IFP CRT PP Cartridge, 0.2µm PP hydrophilic membrane (Food Grade), 10.0-inch Long, Filtration Area 0.7 m², 226 O-Rings with Fin, Silicone Double O-Rings.

Part Number

Description



International Filter Products
Revolutionary systems for your industry



7914 Ajay Drive, Sun Valley, CA 91352
www.internationalfilterproducts.com
sales@internationalfilterproducts.com
 Phone: (818) 504-8115



International Filter Products

Revolutionary systems for your industry

Special Configuration:

Layer Option:

- Single Layer
- Dual Layer

Micron Rating Option:

- 0.04 Micron
- 0.1 Micron
- 0.2 Micron
- 0.45 Micron
- 0.65 Micron
- 0.8 Micron
- 1.2 Micron

End Modification Option:

- 2 : 222 O-Ring Flat
- 6 : 226 O-Ring Fin
- 7 : 226 O-Ring Flat
- 0: DOE Flat Gasket

O-Ring/Gasket Material Option:

- S : Silicone
- E : EPDM
- N : Buna-N
- PV : Teflon Encapsulated Viton
- PS : Teflon Encapsulated Silicone
- V : Viton

