


# Temporary Power

09-00375  
LOCKING

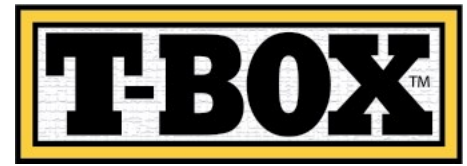

## FEATURES

- NEMA 3 R Rated for outdoor use. For use in wet & damp locations
- Highest quality components to withstand rugged environments and exposure
- Six (6) 20 Amp Outlets
- 30 Amp 250V Receptacle Circuit Breaker Protected
- 50 Amp Inlet and Outlet
- Weatherproof covers on all outlets, inlets and circuit breaker panel
- Repair parts & service available in Chino, California

## SPECIFICATIONS

- 50 AMP INLET (CS6375)
- 50 AMP OUTLET (CS6379)
- 125/250 Volt
- (1) 30A NEMA L6-30 Receptacle with dedicated 250V Circuit Breaker
- 6 NEMA L5-20R 20 amp Twist Lock receptacles with a GFCI module and Circuit Breaker for **each pair** of 20 amp receptacles.
- Yellow/Black
- cETLus Listed

## PACK QUANTITY/UPC

- Pack Quantity = 1
- UPC# 8-03058-00375-3

11½" Height

13¼" Depth

19¾" Width

NEMA 3R Rated For Outdoor Use • Wet and Damp Locations  
CETLUS Intertek Listed 5000285  
Conforms to UL STD. 508  
CERTIFIED to CSA STD. C22.2 NO. 14

**LIMITED WARRANTY** For more warranty information email [customerservice@voltec-industries.com](mailto:customerservice@voltec-industries.com)