DUKERS **Quality Commercial Refrigeration** 

PIZZA PREP TABLE DPP90-12-S3

3-Door



#### **TECHNICAL SPECIFICATIONS**

Voltage/Frequency 115V/60Hz Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel Exterior Material Stainless Steel Temperature Range °F 33 ~ 41°F Compressor Power (HP) 1/2 Nema Config. NEMA5-15P

## DUKERS

Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey

# SVEAR COMPRES

PREMIUN WARRAN⁻

TEARS PARTS

### **PRODUCT FEATURES**


- The compressor is mounted in the back and placed in the coolest possible area; this makes it easily accessible for servicing.
- **(B.B)** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- ₩ Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- Higher Resistance to dust, high quality condenser.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Self-closing doors at 60° with stay open feature.
- 🕷 Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- 5 deep 1/3 plastic plan included.
- High quality coated stainless adjustable shelves prevent peel and rust.
- 🕮 Lifetime warranty on hinges.
- Ħ 5" casters with lock for easy mobility.

**HIGH QUALITY** -STAINLESS STEEL & **ROBUST DESIGN** 

> ( 1-800-931-8628 (a) info@dukersusa.com www.DukersUSA.com

### **DETAILS & SPECIFICATIONS**

### PIZZA PREP TABLE DPP90-12-S3

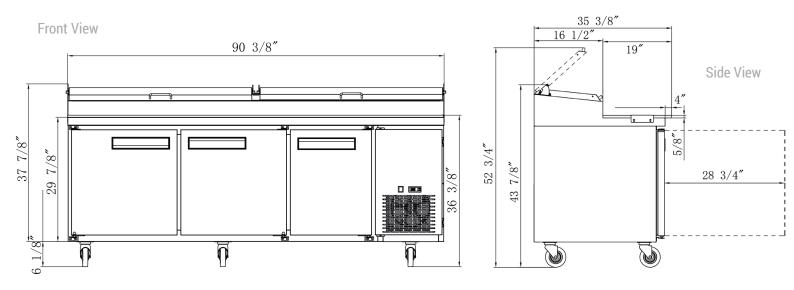

1	/3	PAN	<b>COUNT: 12</b>	
_				

1/3 PAN COUNT: 12										MODEL DPP90-12-S				
1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3		Rated Voltage Rated Frequency Total Input Power	115\ 60Hz 620\
													Total Current Total Capacity	8.5A 24.8
													Climatic Category	4-5
													Protection Type	1
												Des	sign Pressure High Side	300
												De	sign Pressure Low Side	150
													<b>Insulation Blowing Gas</b>	C-Pe
													Refrigerant	R290

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT		40HQ CONTAINER CERT.
DPP90-12-S3	90 3/8 x 31 1/2 x 43 7/8	91 3/8 x 35 7/8 x 48 3/8	423 lbs	3	26





115/60/1 NEMA-5-15P 115V 60Hz 620W 8.5A 24.89cu ft

**300 PSIG 150 PSIG C**-Pentane R290/4.93 oz



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey

 1-800-931-8628 (a) info@dukersusa.com www.DukersUSA.com