



**“WE MAKE THE KITCHEN BETTER!”**

Toll Free: 855-855-0399 Email: [info@atosausa.com](mailto:info@atosausa.com)  
www.atosa.com | www.atosausa.com  
California, Colorado, Florida, Georgia, Illinois,  
Massachusetts, New Jersey, Ohio, Texas, Washington

# Countertop Refrigerated Display Case

MODELS:
DSRC-28

## Standard Features

- Electronic digital controller
- Automatic defogging function
- Stainless steel exterior with black top and door frame
- 4 sided tempered glass
- (4) LED lights standard
- Door lock standard
- 3 stainless steel adjustable shelves
- NEMA 5-15 plug with 9' cord
- Certified for bottled beverage and packaged food



Recommended for 75 °F / 55% relative humidity operating conditions

For the best results of food preservation we recommend setting your refrigerator between 33 °F - 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



2 YEAR PARTS AND LABOR WARRANTY (US ONLY)  
5 YEAR COMPRESSOR PART WARRANTY (US ONLY)



\*For confirmation and updates on the latest energy star models, please visit [energystar.gov](http://energystar.gov)\*




**“WE MAKE THE KITCHEN BETTER!”**

Toll Free: 855-855-0399 Email: [info@atosausa.com](mailto:info@atosausa.com)  
[www.atosa.com](http://www.atosa.com) | [www.atosausa.com](http://www.atosausa.com)  
 California, Colorado, Florida, Georgia, Illinois,  
 Massachusetts, New Jersey, Ohio, Texas, Washington

## SPECIFICATIONS

Models	Door	Capacity (Cu.Ft.)	Shelves	Rated Current (A)	Voltage (V/Hz/Ph)	Power (W)	Refrigerant	Exterior Dimensions W×D×H(Inch)	Net Weight (lbs)	Gross Weight (lbs)
DSRC-28	1	2.8	3	2.2	115/60/1	195	R290	18 <sup>3/4</sup> ×16 <sup>7/8</sup> ×38 <sup>5/8</sup>	97	110

## PLAN VIEW

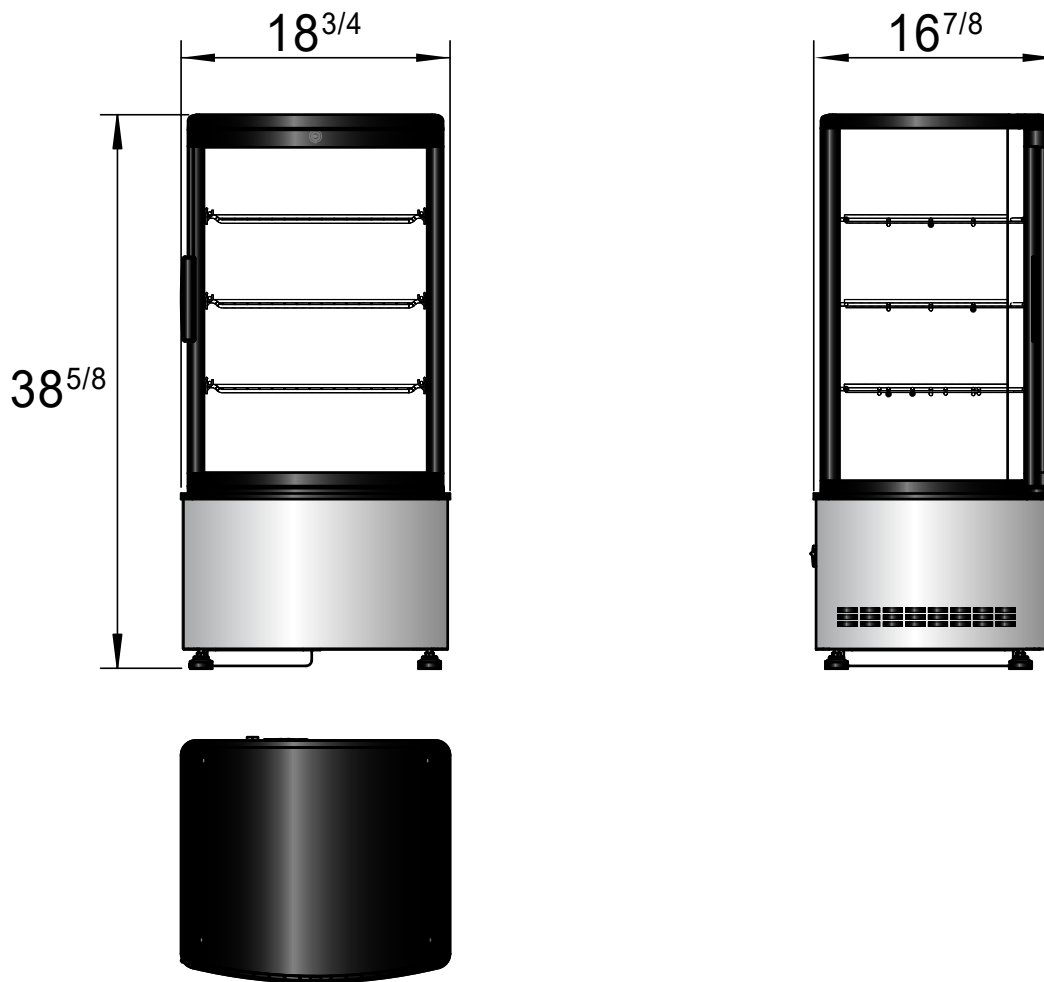


Leveling Legs




Door Lock



Hold Open Feature for Loading



NEMA 5-15P



NEMA 15A/125V