

GENERIC FAST FACTS

Retail Division



One Swing Door

GDM-06-34-HC~TSL01
GDM-06-34-HC~TSL01-EXTTOP
GDM-07-HC~TSL01
GDM-08-HC~TSL01
GDM-10-HC~TSL01
GDM-10PT-HC~TSL01
GDM-10SSL-HC~TSL01
GDM-10-58-HC~TSL01
GDM-12-HC~TSL01
GDM-15-RTO-HC-LD
GDM-19T-HC~TSL01
GDM-23-HC~TSL01
GDM-26-HC~TSL01

Two Swing Doors

GDM-10PT-HC~TSL01 (1fr/1bk)
GDM-35-HC~TSL01
GDM-35SL-RF-HC-LD
GDM-43-HC~TSL01
GDM-49-HC~TSL01
TVM-30-HC~VM01

TVM-36SL-HC~VM01
TVM-48-HC~VM01
TVM-48SL-HC~VM01
TVM-48SL-48-HC~VM01
TVM-48SL-54-HC~VM01

Three Swing Doors

GDM-72-HC~TSL01

Two Slide Doors

GDM-09-SQ-HC-LD
GDM-33-HC-LD
GDM-33SSL-56-HC-LD
GDM-37-HC-LD
GDM-41-HC-LD
GDM-41SL-HC-LD
GDM-41SL-48-HC-LD
GDM-41SL-54-HC-LD
GDM-41SL-60-HC-LD
GDM-45-HC-LD
GDM-47-HC-LD

Three Slide Doors

GDM-69-HC-LD

Four Slide Doors (2fr/2bk)

GDM-33CPT-LD
GDM-33CPT-54-HC-LD

Air Curtain Merchandisers (no doors)

TAC-14GS-LD
TOAM-30-HC/30GS-HC
TAC-36-LD
TAC-48~TSL01
TAC-72-LD



Refrigeration System

By matching and balancing compressors, evaporators and condenser coils, True engineers environmentally friendly refrigeration systems that provide users with shorter run times, lower energy consumption and the industry's coldest holding temperatures.

True's coated evaporator coils have 20-40% more surface area than the industry standard, resulting in faster pull down of product temperatures and quicker recovery times.


By utilizing the largest condensers in the industry, with more standard passes, True units will ensure better food preservation.

RCU Technology


Reverse Condensing Fan Motor Technology (RCU) allows for the reversal of the condensing fan motor, helping to keep the condensing coil clean and reduce the negative effects of a dirty coil. A clean condensing coil can help reduce energy consumption by as much as 20%.

Ecomate® Foam

True continues its commitment to sustainability by pioneering the use of Ecomate, a foamed in place, CFC-free, high-density polyurethane insulation. Ecomate provides unparalleled strength, rigidity, and an increase to an already industry-exceeding insulation factor, with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

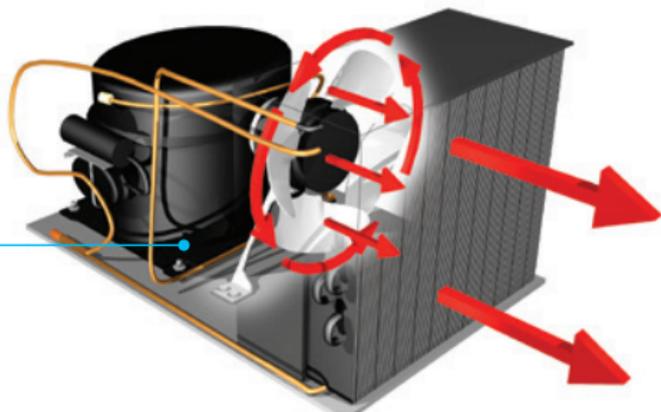

ecomate[®]
BY FOAM SUPPLIES, INC.

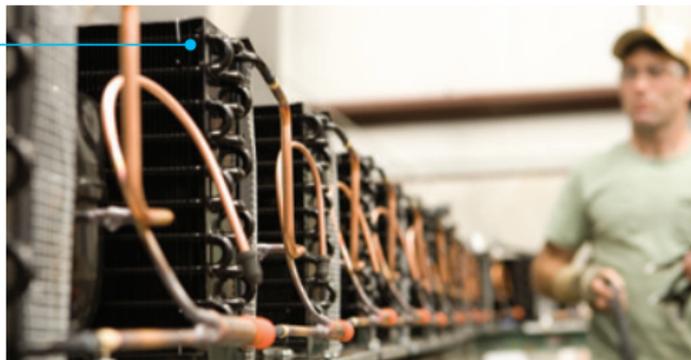

Energy Efficient Glass

All True glass door units utilize the best available technology for energy efficiency. For medium temperature applications (refrigerators), True uses double pane "Low-E" glass assemblies, providing greater insulation values, resulting in decreased compressor run time and reduced energy costs.

100% Run Testing


True run tests every single model that is manufactured as a part of the final quality inspection before releasing the unit into finished goods inventory. Every refrigerator is run tested for 4-6 hours.

Shelving

True manufactures its own heavy-duty wire shelves, utilizing larger diameter steel for strength. Shelving is bonded with powdered PVC to prevent chipping and peeling which is prevalent in standard epoxy coated shelves.

TrueFlex Gravity Feed Organizers

Easy to install and load, TrueFlex Gravity Feed Organizers maximize cooler pack-out. A new silicon "slip" agent improves slide performance. The open track design does not restrict air flow or inhibit cabinet pull down and single glides snap on to our wire shelves; no tie downs! Solid side walls, dual front bars and back bar ensure product stability. Just three sizes fit over 30 models.

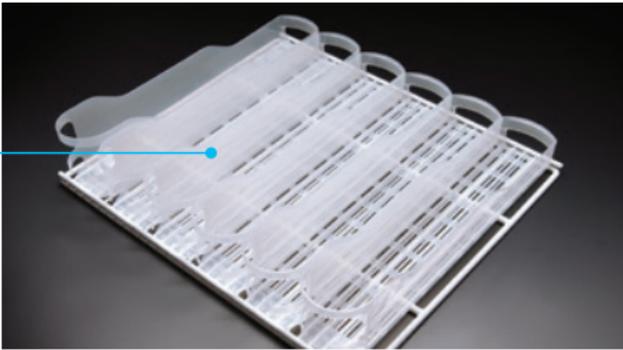

Warranty

True's exclusive 5-year compressor/condensing unit warranty is the envy of the industry. At no additional cost, our customers enjoy the option of having the entire condensing unit replaced. This consists of a new compressor, condenser, start components, and fan motor, all of which are pre-assembled and shipped from the factory. True also includes a 3-year parts and labor warranty and has an extensive parts inventory ready for immediate shipment.

Availability

True builds for inventory, which allows for a near 100% fill rate on standard items within a 2-3 day turn around from the time the purchase order is received and processed.

Energy Star®

True is committed to eco-friendly manufacturing by meeting and surpassing energy standards, without sacrificing performance. By using higher capacity, balanced refrigeration systems, True's run time exceeds industry energy efficiency expectations.



Made in the USA

True has manufactured its products in the United States for over 70 years, using an industry leading combination of high quality materials and components designed to optimize cabinet performance and durability.





Customer Service

True employs an extensive group of regional factory salespeople and international salespeople. Our dedicated sales staff is your premiere source for educated sales and design assistance.



MODELS

TrueFlex[®] Available Models

6 Bottles Deep*

GDM-10-HC~TSL01
GDM-10-58~TSL01
GDM-12-HC~TSL01
GDM-19T-HC~TSL01
TAC-14GS-LD
TOAM-30-HC~TSL01
TOAM-30GS-HC~TSL01

7 Bottles Deep*

GDM-33-HC-LD
GDM-35-HC~TSL01
GDM-37-HC-LD
GDM-41-HC-LD
GDM-43-HC~TSL01
GDM-45-HC-LD
GDM-47-HC-LD
GDM-49-HC~TSL01
GDM-69-HC-LD
GDM-72-HC~TSL01

8 Bottles Deep*

GDM-23-HC~TSL01
GDM-26-HC~TSL01



TrueFlex[®] Gravity Feed Organizers

*Based on 20 oz. Bottles

BENEFITS

- Double front bars and high side walls prevent bottles from tipping. Back bar prevents bottles from leaning against back wall of cooler.
- Single glides offer flexibility to display multiple packages on the same shelf.
- Easy to install. TrueFlex glides snap on to standard wire shelves, making it possible to retrofit older coolers equipped with flat shelves.
- Includes shelf retainer clips that keep shelves from sliding into door. Eliminates zip ties and service calls.
- Enhanced silicon "slip" agent improves gravity feed performance.
- Optimum air flow ensures rapid pull down to serving temperature.
- Can be ordered with the cooler and shipped inside the unit for one stop shopping (pictured).



Model	Dimensions W x D x H (inches)
 GDM-06-34-HC~TSL01	20½ x 26¾ x 33½
 GDM-06-34-HC~TSL01 _{EXTTOP}	20¾ x 26¾ x 34
 GDM-07-HC~TSL01	24½ x 24⅝ x 39⅞
 GDM-08-HC~TSL01	23½ x 23 x 48
 GDM-09-SQ-HC-LD	36 x 22¾ x 39¾
 GDM-10-HC~TSL01	24⅞ x 22⅞ x 53¾
 GDM-10PT-HC~TSL01	24⅞ x 25½ x 53¾
 GDM-10SSL-HC~TSL01	24⅞ x 18 x 53½
 GDM-10-58-HC~TSL01	24⅞ x 22⅞ x 58
 GDM-12-HC~TSL01	24⅞ x 22⅞ x 62¾
GDM-14RF-LD	30¾ x 29¼ x 58
 GDM-15-RTO-HC-LD	24⅞ x 24⅝ x 75

Model	Dimensions W x D x H (inches)
 GDM-19T-HC~TSL01	27 x 24⅞ x 78⅝
 GDM-23-HC~TSL01	27 x 29⅞ x 78⅝
 GDM-26-HC~TSL01	30 x 29⅞ x 78⅝
 GDM-33-HC-LD	39½ x 29⅝ x 78⅝
GDM-33CPT-LD	39½ x 24½ x 59⅞
 GDM-33CPT-54-HC-LD	39½ x 24½ x 54½
 GDM-33SSL-56-HC-LD	36 x 18 x 56
 GDM-35-HC~TSL01	39½ x 29⅞ x 78⅝
 GDM-35SL-RF-HC-LD	39¾ x 24¼ x 58½
 GDM-37-HC-LD	43½ x 29⅝ x 78⅝
 GDM-41-HC-LD	47⅞ x 29⅝ x 78⅝
 GDM-41C-48-HC-LD	48 x 24½ x 48

Model Dimensions W x D x H (inches)

 GDM-41CPT-48-HC-LD	48 x 24 ¹ / ₈ x 48
 GDM-41SL-HC-LD	47 ¹ / ₈ x 24 ¹ / ₈ x 78 ⁵ / ₈
 GDM-41SL-48-HC-LD	46 ⁷ / ₈ x 21 x 47 ³ / ₄
 GDM-41SL-54-HC-LD	47 ¹ / ₈ x 21 x 54 ¹ / ₈
 GDM-41SL-60-HC-LD	47 ¹ / ₈ x 21 x 59 ⁷ / ₈
 GDM-43-HC~TSL01	47 ¹ / ₈ x 29 ⁷ / ₈ x 78 ⁵ / ₈
 GDM-45-HC-LD	51 ¹ / ₈ x 29 ⁵ / ₈ x 78 ⁵ / ₈
 GDM-47-HC-LD	54 ¹ / ₈ x 29 ⁵ / ₈ x 78 ⁵ / ₈
 GDM-49-HC~TSL01	54 ¹ / ₈ x 29 ⁷ / ₈ x 78 ⁵ / ₈
 GDM-69-HC-LD	78 ¹ / ₈ x 29 ⁵ / ₈ x 78 ⁵ / ₈
 GDM-72-HC~TSL01	78 ¹ / ₈ x 29 ⁷ / ₈ x 78 ⁵ / ₈
 TVM-30-HC~VM01	30 ⁷ / ₈ x 23 ⁷ / ₈ x 54 ⁷ / ₈

Model Dimensions W x D x H (inches)

 TVM-36SL-HC~VM01	36 x 21 ¹ / ₄ x 55
 TVM-48-HC~VM01	47 ¹ / ₄ x 29 ⁷ / ₈ x 78 ⁵ / ₈
 TVM-48SL-HC~VM01	47 ¹ / ₈ x 25 ¹ / ₄ x 78 ³ / ₄
 TVM-48SL-48-HC~VM01	46 ⁷ / ₈ x 21 x 48
 TVM-48SL-54-HC~VM01	47 ¹ / ₈ x 21 ³ / ₄ x 53 ⁷ / ₈
TAC-14GS-LD	30 ¹ / ₄ x 32 ¹ / ₈ x 56 ³ / ₈
 TOAM-30-HC~TSL01	30 x 29 ¹ / ₄ x 80 ⁵ / ₈
 TOAM-30GS-HC~TSL01	30 x 29 ¹ / ₄ x 80 ⁵ / ₈
TAC-36-LD	36 x 29 ¹ / ₄ x 80 ⁵ / ₈
TAC-48 ~TSL01	48 x 29 ¹ / ₄ x 80 ⁵ / ₈
TAC-72-LD	72 x 29 ¹ / ₄ x 81 ⁷ / ₈

Model	Dimensions W x D x H (mm)
 GDM-06-34-HC~TSL01	519 x 670 x 850
 GDM-06-34-HC~TSL01 _{EXTTOP}	518 x 670 x 863
 GDM-07-HC~TSL01	613 x 626 x 1013
 GDM-08-HC~TSL01	594 x 583 x 1219
 GDM-09-SQ-HC-LD	914 x 567 x 1008
 GDM-10-HC~TSL01	632 x 581 x 1356
 GDM-10PT-HC~TSL01	630 x 648 x 1356
 GDM-10SSL-HC~TSL01	632 x 458 x 1359
 GDM-10-58-HC~TSL01	630 x 581 x 1472
 GDM-12-HC~TSL01	632 x 581 x 1585
GDM-14RF-LD	772 x 743 x 1474
 GDM-15-RTO-HC-LD	632 x 626 x 1905

Model	Dimensions W x D x H (mm)
 GDM-19T-HC~TSL01	686 x 632 x 1998
 GDM-23-HC~TSL01	686 x 759 x 1998
 GDM-26-HC~TSL01	762 x 759 x 1998
 GDM-33-HC-LD	1004 x 753 x 1998
GDM-33CPT-LD	1004 x 613 x 1521
 GDM-33CPT-54-HC-LD	1004 x 613 x 1375
 GDM-33SSL-56-HC-LD	915 x 458 x 1423
 GDM-35-HC~TSL01	1004 x 759 x 1998
 GDM-35SL-RF-HC-LD	1010 x 616 x 1477
 GDM-37-HC-LD	1105 x 753 x 1998
 GDM-41-HC-LD	1197 x 753 x 1998
 GDM-41C-48-HC-LD	1220 x 613 x 120

Model	Dimensions W x D x H (mm)
 GDM-41CPT-48-HC-LD	1220 x 613 x 120
 GDM-41SL-HC-LD	1197 x 613 x 1998
 GDM-41SL-48-HC-LD	1191 x 534 x 1213
 GDM-41SL-54-HC-LD	1197 x 534 x 1375
 GDM-41SL-60-HC-LD	1197 x 534 x 1521
 GDM-43-HC~TSL01	1197 x 759 x 1998
 GDM-45-HC-LD	1299 x 753 x 1998
 GDM-47-HC-LD	1375 x 753 x 1998
 GDM-49-HC~TSL01	1375 x 759 x 1998
 GDM-69-HC-LD	1985 x 753 x 1998
 GDM-72-HC~TSL01	1985 x 759 x 1998
 TVM-30-HC~VM01	783 x 606 x 1394

Model	Dimensions W x D x H (mm)
 TVM-36SL-HC~VM01	915 x 534 x 1397
 TVM-48-HC~VM01	1198 x 757 x 1996
 TVM-48SL-HC~VM01	1197 x 641 x 2000
 TVM-48SL-48-HC~VM01	1190 x 533 x 1217
 TVM-48SL-54-HC~VM01	1197 x 550 x 1368
TAC-14GS-LD	769 x 816 x 1432
 TOAM-30-HC~TSL01	762 x 743 x 2048
 TOAM-30GS-HC~TSL01	762 x 743 x 2048
TAC-36-LD	915 x 743 x 2048
TAC-48~TSL01	1220 x 743 x 2048
TAC-72-LD	1829 x 743 x 2080

Model	H.P.		AMPS	
	U.S.	INTL	U.S.	INTL
 GDM-06-34-HC~TSL01	1/10	n/a	1.6	n/a
 GDM-06-34-HC~TSL01 _{EXTTOP}	1/10	n/a	1.6	n/a
 GDM-07-HC~TSL01	1/6	1/6	1.9	1.1
 GDM-08-HC~TSL01	1/6	n/a	1.7	n/a
 GDM-09-SQ-HC-LD	1/6	n/a	1.9	n/a
 GDM-10-HC~TSL01	1/6	n/a	2	n/a
 GDM-10PT-HC~TSL01	1/5	n/a	2.2	n/a
 GDM-10SSL-HC~TSL01	1/6	n/a	2	n/a
 GDM-10-58-HC~TSL01	1/6	n/a	2	n/a
 GDM-12-HC~TSL01	1/6	n/a	2	n/a
GDM-14RF-LD	1/3	n/a	7.9	n/a
 GDM-15-RTO-HC-LD	1/6	1/6	2	n/a

Model	H.P.		AMPS	
	U.S.	INTL	U.S.	INTL
 GDM-19T-HC~TSL01	1/3	1/3	5.4	2.4
 GDM-23-HC~TSL01	1/3	1/3	5.4	2.4
 GDM-26-HC~TSL01	1/3	n/a	5.4	n/a
 GDM-33-HC-LD	1/2	1/2	6.5	4.6
GDM-33CPT-LD	1/3	n/a	4.1	n/a
 GDM-33CPT-54-HC-LD	1/5	n/a	2.0	n/a
 GDM-33SSL-56-HC-LD	1/5	n/a	3	n/a
 GDM-35-HC~TSL01	1/2	1/2	6.5	4.6
 GDM-35SL-RF-HC-LD	1/5	n/a	3.4	n/a
 GDM-37-HC-LD	1/2	n/a	6.5	n/a
 GDM-41-HC-LD	1/2	n/a	6.5	n/a
 GDM-41C-48-HC-LD	1/5	n/a	3.4	n/a

Model	H.P.		AMPS	
	U.S.	INTL	U.S.	INTL
 GDM-41CPT-48-HC-LD	1/5	n/a	2.0	n/a
 GDM-41SL-HC-LD	1/2	n/a	10.8	n/a
 GDM-41SL-48-HC-LD	1/4	n/a	3.4	n/a
 GDM-41SL-54-HC-LD	1/4	n/a	3.8	n/a
 GDM-41SL-60-HC-LD	1/4	n/a	3.8	n/a
 GDM-43-HC~TSL01	1/2	n/a	6.5	n/a
 GDM-45-HC-LD	1/2	n/a	8.5	n/a
 GDM-47-HC-LD	1/2	n/a	8.5	n/a
 GDM-49-HC~TSL01	1/2	n/a	8.5	n/a
 GDM-69-HC-LD	1/2	n/a	9.3	n/a
 GDM-72-HC~TSL01	1/2	n/a	9.3	n/a
 TVM-30-HC~VM01	1/5	n/a	2.1	n/a

Model	H.P.		AMPS	
	U.S.	INTL	U.S.	INTL
 TVM-36SL-HC~VM01	1/4	n/a	3.8	n/a
 TVM-48-HC~VM01	1/2	n/a	6.5	n/a
 TVM-48SL-HC~VM01	1/2	1/2	10.8	4.9
 TVM-48SL-48-HC~VM01	1/5	n/a	2.0	n/a
 TVM-48SL-54-HC~VM01	1/4	n/a	8.8	n/a
TAC-14GS-LD	3/4	n/a	11.2	n/a
 TOAM-30-HC~TSL01	3/4	n/a	9.5	n/a
 TOAM-30GS-HC~TSL01	3/4	n/a	9.5	n/a
TAC-36-LD	1	n/a	6.8	n/a
TAC-48 ~TSL01	1	1	12.0	9.0
TAC-72-LD	3/4	n/a	12.5	n/a



True stripe signs are standard on all GDM models.

Plain White, Plain Black, and Stainless Steel signs are available upon request on most models.

Alternative signs are available at no charge if indicated at the time the order is placed and shipped from the factory.

If a sign is ordered after the unit leaves the factory, an upcharge will apply.

Custom signs and graphics are available. Please contact the factory for details and pricing.

True stripe graphic available for all models



Upcharges may apply.

Exterior Options

Generic FAST FACTS



Black



White



Stainless Steel

Availability of models may vary.

MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	20½ x 26¾ x 33½ inches 519 x 670 x 850 mm
SHELF SIZE (WD)	17½ x 17½ inches 435 x 445 mm
CAPACITY (20 OZ)	Standard Shelving: 3 Flat Shelves - 96
TRAILER LOADS	40' Container - 78, 48' Trailer Load - 128 53' Trailer Load - 144
CRATED WEIGHT (LBS)	175
HORSEPOWER	1/10
AMPS	1.6
DAILY KWH USAGE	0.86
DEPTH DOES NOT INCLUDE 1¾" FOR SWING DOOR HANDLE.	

True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	20 ³ / ₈ x 26 ³ / ₈ x 34 inches 518 x 670 x 863 mm
SHELF SIZE (WD)	17 ¹ / ₈ x 17 ¹ / ₂ inches 435 x 445 mm
CAPACITY (20 OZ)	Standard Shelving: 3 Flat Shelves - 96
TRAILER LOADS	40' Container - 78, 48' Trailer Load - 1128 53' Trailer Load - 144
CRATED WEIGHT (LBS)	175
HORSEPOWER	1/10
AMPS	1.6
DAILY KWH USAGE	0.86

DEPTH DOES NOT INCLUDE 1³/₈" FOR SWING DOOR HANDLE.

 True
REFRIGERATION


MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	24 $\frac{1}{8}$ x 24 $\frac{5}{8}$ x 39 $\frac{7}{8}$ inches 613 x 626 x 1013 mm
SHELF SIZE (WD)	2 Top = 19 $\frac{3}{4}$ x 18 inches 1 Bottom = 19 $\frac{3}{4}$ x 16 $\frac{1}{2}$ inches 2 Top = 502 x 458 mm 1 Bottom = 502 x 420 mm
CAPACITY (20 OZ)	Standard Shelving: 3 Flat Shelves - 112
TRAILER LOADS	40' Container - 84, 48' Trailer Load - 102 53' Trailer Load - 120
CRATED WEIGHT (LBS)	180
HORSEPOWER	$\frac{1}{6}$
AMPS	1.9
DAILY KWH USAGE	1.04

DEPTH DOES NOT INCLUDE 1 $\frac{3}{8}$ " FOR SWING DOOR HANDLE.

 True
REFRIGERATION


MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	23½ x 23 x 48 inches 594 x 583 x 1219 mm
SHELF SIZE (WD)	19⅞ x 17½ inches 486 x 445 mm
CAPACITY (20 OZ)	Standard Shelving: 3 Flat Shelves - 108
TRAILER LOADS	40' Container -51, 48' Trailer Load -60 53' Trailer Load -66
CRATED WEIGHT (LBS)	180
HORSEPOWER	⅓
AMPS	1.7
DAILY KWH USAGE	1.05

DEPTH DOES NOT INCLUDE 1⅜" FOR SWING DOOR HANDLE.


 True
REFRIGERATION


MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	36 x 22 ³ / ₈ x 39 ³ / ₄ inches 914 x 567 x 1008 mm
SHELF SIZE (WD)	2 Top = 31 ³ / ₄ x 15 1 Bottom = 31 ³ / ₄ x 8 ¹ / ₂ inches 2 Top = 807 x 381 1 Bottom = 807 x 210 mm
CAPACITY (20 OZ)	Standard Shelving: 3 Flat Shelves - 143
TRAILER LOADS	40' Container - 66, 48' Trailer Load - 112 53' Trailer Load - 120
CRATED WEIGHT (LBS)	230
HORSEPOWER	1/6
AMPS	1.9
DAILY KWH USAGE	TBD

DEPTH DOES NOT INCLUDE 3/4" FOR SLIDE DOOR HANDLE.



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	24 ⁷ / ₈ x 22 ⁷ / ₈ x 53 ³ / ₈ inches 632 x 581 x 1356 mm
SHELF SIZE (WD)	20 ⁵ / ₈ x 17 ¹ / ₂ inches 524 x 445 mm
CAPACITY (20 OZ)	Standard Shelving: 4 Levels - 168 <i>Trueflex</i> . (3) - 108
TRAILER LOADS	40' Container - 48, 48' Trailer Load - 57 53' Trailer Load - 63
CRATED WEIGHT (LBS)	TBD
HORSEPOWER	1/6
AMPS	2
DAILY KWH USAGE	1.18
DEPTH DOES NOT INCLUDE 1" FOR REAR BUMPERS.	

True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	24 ⁷ / ₈ x 25 ¹ / ₂ x 53 ³ / ₈ inches 630 x 648 x 1356 mm
SHELF SIZE (WD)	20 ⁵ / ₈ x 17 ¹ / ₂ inches 524 x 445 mm
CAPACITY (20 OZ)	Standard Shelving: 3 Flat Shelves - 126
TRAILER LOADS	40' Container - 45, 48' Trailer Load - 54 53' Trailer Load - 60
CRATED WEIGHT (LBS)	TBD
HORSEPOWER	1/5
AMPS	2.2
DAILY KWH USAGE	TBD
DEPTH DOES NOT INCLUDE 3/8" EACH SIDE FOR DOOR HANDLES.	
	



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	24 ⁷ / ₈ x 18 x 53 ¹ / ₂ inches 632 x 458 x 1359 mm
SHELF SIZE (WD)	20 ⁵ / ₈ x 12 ¹ / ₂ inches 524 x 318 mm
CAPACITY (20 OZ)	Standard Shelving: 3 Flat Shelves - 84
TRAILER LOADS	40' Container - 57, 48' Trailer Load - 66 53' Trailer Load - 75
CRATED WEIGHT (LBS)	170
HORSEPOWER	1/6
AMPS	2
DAILY KWH USAGE	TBD

DEPTH DOES NOT INCLUDE 3/8" FOR SWING DOOR HANDLE.
DEPTH DOES NOT INCLUDE 1" FOR REAR BUMPERS.

True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	24 ⁷ / ₈ x 22 ⁷ / ₈ x 58 inches 630 x 581 x 1472 mm
SHELF SIZE (WD)	20 ⁵ / ₈ x 17 ¹ / ₂ inches 524 x 445 mm
CAPACITY (20 OZ)	Standard Shelving: 3 Flat Shelves - 126 Shelving Options: 4 Flat Shelves - 168 <i>TrueFlex</i> . (4) - 144
TRAILER LOADS	40' Container - 48, 48' Trailer Load - 57 53' Trailer Load - 63
CRATED WEIGHT (LBS)	210
HORSEPOWER	1/6
AMPS	2
DAILY KWH USAGE	1.86

DEPTH DOES NOT INCLUDE 3/8" FOR SWING DOOR HANDLE.
 DEPTH DOES NOT INCLUDE 1" FOR REAR BUMPERS.



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	24 ⁷ / ₈ x 22 ⁷ / ₈ x 62 ³ / ₈ inches 632 x 581 x 1585 mm
SHELF SIZE (WD)	20 ⁵ / ₈ x 17 ¹ / ₂ inches 524 x 445 mm
CAPACITY (20 OZ)	Standard Shelving: 3 Flat Shelves - 126 Shelving Options: 4 Flat Shelves - 168 <i>Trueflex</i> . (4) - 144
TRAILER LOADS	40' Container - 48, 48' Trailer Load - 57 53' Trailer Load - 63
CRATED WEIGHT (LBS)	TBD
HORSEPOWER	1/6
AMPS	2
DAILY KWH USAGE	1.27
DEPTH DOES NOT INCLUDE 3/8" FOR SWING DOOR HANDLE. DEPTH DOES NOT INCLUDE 1" FOR REAR BUMPERS.	

True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	30 ³ / ₈ x 29 ¹ / ₄ x 58 inches 772 x 743 x 1474 mm
SHELF SIZE (WD)	25 ³ / ₄ x 20 ¹ / ₂ inches 655 x 521 mm
CAPACITY (20 OZ)	Standard Shelving: 4 Flat Shelves - 224 <i>Trueflex</i> . (4) - 252
TRAILER LOADS	40' Container - 26, 48' Trailer Load - 48 53' Trailer Load - 54
CRATED WEIGHT (LBS)	295
HORSEPOWER	1/3
AMPS	7.9
DAILY KWH USAGE	3.63

DEPTH DOES NOT INCLUDE 2" FOR DOOR HANDLES.


 True
REFRIGERATION


MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	24 ⁷ / ₈ x 24 ⁵ / ₈ x 75 inches 632 x 626 x 1905 mm
SHELF SIZE (WD)	20 ⁵ / ₈ x 17 ¹ / ₂ inches 524 x 445 mm
CAPACITY (20 OZ)	Standard Shelving: 5 Flat Shelves - 210 <i>Trueflex</i> . (5) - 180
TRAILER LOADS	40' Container - 39, 48' Trailer Load - 48 53' Trailer Load - 54
CRATED WEIGHT (LBS)	258
HORSEPOWER	1/6
AMPS	2
DAILY KWH USAGE	TBD
DEPTH DOES NOT INCLUDE 3/8" FOR SWING DOOR HANDLE. DEPTH DOES NOT INCLUDE 1" FOR REAR BUMPERS.	

True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	27 x 24 ⁷ / ₈ x 78 ⁵ / ₈ inches 686 x 632 x 1998 mm
SHELF SIZE (WD)	22 ⁹ / ₁₆ x 18 ¹ / ₄ inches 575 x 464 mm
CAPACITY (20 OZ)	Standard Shelving: 4 Flat Shelves - 196 <i>TrueFlex</i> . (4) - 168 Shelving Options: 5 Flat Shelves - 245 <i>TrueFlex</i> . (5) - 210
TRAILER LOADS	40' Container - 42, 48' Trailer Load - 51 53' Trailer Load - 57
CRATED WEIGHT (LBS)	315
HORSEPOWER	1/3
AMPS	5.4
DAILY KWH USAGE	1.91

DEPTH DOES NOT INCLUDE 1⁵/₈" FOR SWING DOOR HANDLE


True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	27 x 29 ⁷ / ₈ x 78 ⁵ / ₈ inches 686 x 759 x 1998 mm
SHELF SIZE (WD)	22 ⁵ / ₈ x 23 ¹ / ₄ inches 575 x 591 mm
CAPACITY (20 OZ)	Standard Shelving: 4 Flat Shelves - 310 Shelving Options: 5 Flat Shelves - TBD <i>Trueflex</i> . (5) - 280
TRAILER LOADS	40' Container - 39, 48' Trailer Load - 48 53' Trailer Load - 51
CRATED WEIGHT (LBS)	355
HORSEPOWER	1/3
AMPS	5.4
DAILY KWH USAGE	1.95

DEPTH DOES NOT INCLUDE 1⁵/₈" FOR SWING DOOR HANDLE.

 true
REFRIGERATION


MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	30 x 29 ⁷ / ₈ x 78 ⁵ / ₈ inches 762 x 759 x 1998 mm
SHELF SIZE (WD)	25 ³ / ₄ x 23 ¹ / ₄ inches 655 x 591 mm
CAPACITY (20 OZ)	Standard Shelving: 5 Flat Shelves - 360 <i>Trueflex</i> . (5) - 320
TRAILER LOADS	40' Container - 26, 48' Trailer Load - 48 53' Trailer Load - 51
CRATED WEIGHT (LBS)	325
HORSEPOWER	1/3
AMPS	5.4
DAILY KWH USAGE	1.92

DEPTH DOES NOT INCLUDE 1⁵/₈" FOR SWING DOOR HANDLE.


True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	39½ x 29⅝ x 78⅝ inches 1004 x 753 x 1998 mm
SHELF SIZE (WD)	17¼ x 21⅛ inches 439 x 537 mm
CAPACITY (20 OZ)	Standard Shelving: 8 Flat Shelves - 336 Shelving Options: 10 Flat Shelves - 420 <i>Trueflex.</i> (10) - 350
TRAILER LOADS	40' Container - 28, 48' Trailer Load - 34 53' Trailer Load - 38
CRATED WEIGHT (LBS)	370
HORSEPOWER	½
AMPS	6.5
DAILY KWH USAGE	3.69
DEPTH DOES NOT INCLUDE ¾" FOR SLIDE DOOR HANDLE.	



True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	39½ x 24⅛ x 59⅞ inches 1004 x 613 x 1521 mm
SHELF SIZE (WD)	34⅜ x 17⅞ inches 874 x 455 mm
CAPACITY (20 OZ)	Standard Shelving: <i>TrueTrac</i> (3) - 198; (4) - 264 Shelving Options: 3 Flat Shelves - 198 4 Flat Shelves - 264
TRAILER LOADS	40' Container - 33, 48' Trailer Load - 39 53' Trailer Load - 44
CRATED WEIGHT (LBS)	400
HORSEPOWER	⅓
AMPS	4.1
DAILY KWH USAGE	4.51

DEPTH DOES NOT INCLUDE ⅞" EACH SIDE FOR SLIDE DOOR HANDLES.



True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	39½ x 24⅛ x 54⅛ inches 1004 x 613 x 1375 mm
SHELF SIZE (WD)	34¾ x 17⅞ inches 874 x 455 mm
CAPACITY (20 OZ)	Standard Shelving: <i>truetrac</i> . (3) - 198, Shelving Options: 3 Flat Shelves - 198
TRAILER LOADS	40' Container - 34, 48' Trailer Load - 39 53' Trailer Load - 44
CRATED WEIGHT (LBS)	TBD
HORSEPOWER	⅓
AMPS	2.0
DAILY KWH USAGE	TBD

DEPTH DOES NOT INCLUDE ⅞" EACH SIDE FOR SLIDE DOOR HANDLES.


 true
REFRIGERATION


MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	36 x 18 x 56 inches 915 x 458 x 1423 mm
SHELF SIZE (WD)	31 ³ / ₄ x 11 ³ / ₄ inches 807 x 299 mm
CAPACITY (20 OZ)	Standard Shelving: 4 Flat Shelves - 160 Shelving Options: N/A
TRAILER LOADS	40' Container - 48, 48' Trailer Load - 56 53' Trailer Load - 64
CRATED WEIGHT (LBS)	235
HORSEPOWER	1/5
AMPS	3
DAILY KWH USAGE	2.08

DEPTH DOES NOT INCLUDE 3/8" FOR SLIDE DOOR HANDLES.


 True
REFRIGERATION


MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	39½ x 29⅞ x 78⅝ inches 1004 x 759 x 1998 mm
SHELF SIZE (WD)	17¼ x 21⅞ inches 439 x 537 mm
CAPACITY (20 OZ)	Standard Shelving: 8 Flat Shelves - 336 Shelving Options: 10 Flat Shelves - 420 <i>Trueflex.</i> (10) - 350
TRAILER LOADS	40' Container - 26, 48' Trailer Load - 32 53' Trailer Load - 34
CRATED WEIGHT (LBS)	370
HORSEPOWER	½
AMPS	6.5
DAILY KWH USAGE	3.3

DEPTH DOES NOT INCLUDE 1⅝" FOR SWING DOOR HANDLES.


 True
REFRIGERATION


MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	39 ³ / ₄ x 24 ¹ / ₄ x 58 ¹ / ₈ inches 1010 x 616 x 1477 mm
SHELF SIZE (WD)	35 ¹ / ₄ x 15 ¹ / ₄ inches 896 x 388 mm
CAPACITY (20 OZ)	Standard Shelving: <i>truetrac</i> (4) - 220 Shelving Options: 4 Flat Shelves - 240
TRAILER LOADS	40' Container - 34, 48' Trailer Load - 40 53' Trailer Load - 44
CRATED WEIGHT (LBS)	275
HORSEPOWER	1/5
AMPS	3.4
DAILY KWH USAGE	TBD

True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	43½ x 29⅝ x 78⅝ inches 1105 x 753 x 1998 mm
SHELF SIZE (WD)	19 x 20⅝ inches 438 x 524 mm
CAPACITY (20 OZ)	Standard Shelving: 8 Flat Shelves - 384 Shelving Options: 10 Flat Shelves - 480 <i>Trueflex.</i> (10) - 420
TRAILER LOADS	40' Container - 24, 48' Trailer Load - 34 53' Trailer Load - 38
CRATED WEIGHT (LBS)	395
HORSEPOWER	½
AMPS	6.5
DAILY KWH USAGE	3.79

DEPTH DOES NOT INCLUDE ⅜" FOR SLIDE DOOR HANDLES.


 True
REFRIGERATION


MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	47 $\frac{1}{8}$ x 29 $\frac{5}{8}$ x 78 $\frac{5}{8}$ inches 1197 x 753 x 1998 mm
SHELF SIZE (WD)	20 $\frac{7}{8}$ x 20 $\frac{5}{8}$ inches 531 x 524 mm
CAPACITY (20 OZ)	Standard Shelving: 8 Flat Shelves - 392 Shelving Options: 10 Flat Shelves - 490 <i>TrueFlex</i> . (10) - 420
TRAILER LOADS	40' Container - 23, 48' Trailer Load - 28 53' Trailer Load - 31
CRATED WEIGHT (LBS)	405
HORSEPOWER	$\frac{1}{2}$
AMPS	6.5
DAILY KWH USAGE	3.91

DEPTH DOES NOT INCLUDE $\frac{3}{8}$ " FOR SLIDE DOOR HANDLES.


True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	48 x 24 $\frac{1}{8}$ x 48 inches 1220 x 613 x 1220 mm
SHELF SIZE (WD)	21 $\frac{1}{2}$ x 17 $\frac{1}{2}$ inches 547 x 445 mm
CAPACITY (20 OZ)	Standard Shelving: 6 Flat Shelves - 216 Shelving Options: 6 Flat Shelves - 252 <i>Trueflex</i> . (6) - 216
TRAILER LOADS	40' Container - 27, 48' Trailer Load - 33 53' Trailer Load - 36
CRATED WEIGHT (LBS)	325
HORSEPOWER	$\frac{1}{5}$
AMPS	3.4
DAILY KWH USAGE	1.57

DEPTH DOES NOT INCLUDE $\frac{7}{8}$ " (23mm) FOR SLIDE DOOR HANDLES.

 True
REFRIGERATION


MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	48 x 24 $\frac{1}{8}$ x 48 inches 1220 x 613 x 1220 mm
SHELF SIZE (WD)	20 $\frac{5}{8}$ x 16 $\frac{13}{32}$ inches 524 x 417 mm
CAPACITY (20 OZ)	Standard Shelving: <i>TrueTrac</i> (6) - 180 6 Flat Shelves - 180
TRAILER LOADS	40' Container - 27, 48' Trailer Load - 33 53' Trailer Load - 36
CRATED WEIGHT (LBS)	394
HORSEPOWER	$\frac{1}{5}$
AMPS	2.0
DAILY KWH USAGE	4.12

DEPTH DOES NOT INCLUDE $\frac{7}{8}$ " (23mm) FOR SLIDE DOOR HANDLES.

True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	47 $\frac{1}{8}$ x 24 $\frac{1}{8}$ x 78 $\frac{5}{8}$ inches 1197 x 613 x 1998 mm
SHELF SIZE (WD)	20 $\frac{7}{8}$ x 16 $\frac{1}{4}$ inches 531 x 413 mm
CAPACITY (20 OZ)	Standard Shelving: <i>truetrac</i> . (8) - 240 Shelving Options: 8 Flat Shelves - 336 10 Flat Shelves - 420 <i>truetrac</i> . (10) - 300
TRAILER LOADS	40' Container - 27, 48' Trailer Load - 33 53' Trailer Load - 37
CRATED WEIGHT (LBS)	410
HORSEPOWER	$\frac{1}{2}$
AMPS	10.8
DAILY KWH USAGE	3.31
DEPTH DOES NOT INCLUDE $\frac{3}{8}$ " FOR SLIDE DOOR HANDLES.	

True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	46 ⁷ / ₈ x 21 x 47 ³ / ₄ inches 1191 x 534 x 1213 mm
SHELF SIZE (WD)	21 ¹ / ₂ x 14 ³ / ₄ inches 547 x 375 mm
CAPACITY (20 OZ)	Standard Shelving: <i>truetrac</i> (6) - 180 Shelving Options: 6 Flat Shelves - 210
TRAILER LOADS	40' Container - 28, 48' Trailer Load - 44 53' Trailer Load - 48
CRATED WEIGHT (LBS)	295
HORSEPOWER	1/4
AMPS	3.4
DAILY KWH USAGE	1.57

† DEPTH DOES NOT INCLUDE 7/8" (23 MM) FOR DOOR HANDLES.


 True
REFRIGERATION


MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	47 $\frac{1}{8}$ x 21 x 54 $\frac{1}{8}$ inches 1197 x 534 x 1375 mm
SHELF SIZE (WD)	20 $\frac{7}{8}$ x 14 $\frac{3}{4}$ inches 531 x 375 mm
CAPACITY (20 OZ)	Standard Shelving: <i>truetrac</i> (6) - 180 Shelving Options: 6 Flat Shelves - 210
TRAILER LOADS	40' Container - 27, 48' Trailer Load - 44 53' Trailer Load - 49
CRATED WEIGHT (LBS)	295
HORSEPOWER	$\frac{1}{4}$
AMPS	3.8
DAILY KWH USAGE	1.97

DEPTH DOES NOT INCLUDE $\frac{7}{8}$ " FOR SLIDE DOOR HANDLES.

 True
REFRIGERATION


MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	47 $\frac{1}{8}$ x 21 x 59 $\frac{7}{8}$ inches 1197 x 534 x 1521 mm
SHELF SIZE (WD)	20 $\frac{7}{8}$ x 14 $\frac{3}{4}$ inches 531 x 375 mm
CAPACITY (20 OZ)	Standard Shelving: <i>truetrac</i> (6) - 180 Shelving Options: 6 Flat Shelves - 210 8 Flat Shelves - 280
TRAILER LOADS	40' Container - 27, 48' Trailer Load - 44 53' Trailer Load - 49
CRATED WEIGHT (LBS)	345
HORSEPOWER	$\frac{1}{4}$
AMPS	3.8
DAILY KWH USAGE	2.27

DEPTH DOES NOT INCLUDE $\frac{7}{8}$ " FOR SLIDE DOOR HANDLES.

 True
REFRIGERATION


MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	47 $\frac{1}{8}$ x 29 $\frac{7}{8}$ x 78 $\frac{5}{8}$ inches 1197 x 759 x 1998 mm
SHELF SIZE (WD)	20 $\frac{7}{8}$ x 22 $\frac{1}{8}$ inches 531 x 562 mm
CAPACITY (20 OZ)	Standard Shelving: 8 Flat Shelves - 392 Shelving Options: 10 Flat Shelves - 490 <i>Trueflex.</i> (10) - 420
TRAILER LOADS	40' Container - 22, 48' Trailer Load - 27 53' Trailer Load - 29
CRATED WEIGHT (LBS)	410
HORSEPOWER	$\frac{1}{2}$
AMPS	6.5
DAILY KWH USAGE	3.69
DEPTH DOES NOT INCLUDE $\frac{3}{8}$ " FOR SLIDE DOOR HANDLES.	

True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	51 1/8 x 29 5/8 x 78 5/8 inches 1299 x 753 x 1998 mm
SHELF SIZE (WD)	23 x 20 5/8 inches 585 x 524 mm
CAPACITY (20 OZ)	Standard Shelving: 8 Flat Shelves - 448 Shelving Options: 10 Flat Shelves - 560 <i>Trueflex</i> . (10) - 490
TRAILER LOADS	40' Container - 22, 48' Trailer Load - 27 53' Trailer Load - 30
CRATED WEIGHT (LBS)	465
HORSEPOWER	1/2
AMPS	8.5
DAILY KWH USAGE	3.88

DEPTH DOES NOT INCLUDE 3/8" FOR SLIDE DOOR HANDLES.



True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	54 1/8 x 29 5/8 x 78 5/8 inches 1375 x 753 x 1998 mm
SHELF SIZE (WD)	24 1/2 x 20 5/8 inches 623 x 524 mm
CAPACITY (20 OZ)	Standard Shelving: 8 Flat Shelves - 448 Shelving Options: 10 Flat Shelves - 560 <i>Trueflex</i> . (10) - 490
TRAILER LOADS	40' Container - 22, 48' Trailer Load - 27 53' Trailer Load - 30
CRATED WEIGHT (LBS)	485
HORSEPOWER	1/2
AMPS	8.5
DAILY KWH USAGE	4.44

DEPTH DOES NOT INCLUDE 3/8" FOR SLIDE DOOR HANDLES.


 True
REFRIGERATION


MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	54 $\frac{1}{8}$ x 29 $\frac{7}{8}$ x 78 $\frac{5}{8}$ inches 1375 x 759 x 1998 mm
SHELF SIZE (WD)	24 $\frac{5}{8}$ x 22 $\frac{1}{2}$ inches 626 x 572 mm
CAPACITY (20 OZ)	Standard Shelving: 8 Flat Shelves - 448 Shelving Options: 10 Flat Shelves - 576 <i>Trueflex</i> . (10) - 560
TRAILER LOADS	40' Container - 16, 48' Trailer Load - 26 53' Trailer Load - 28
CRATED WEIGHT (LBS)	465
HORSEPOWER	$\frac{1}{2}$
AMPS	8.5
DAILY KWH USAGE	3.6

DEPTH DOES NOT INCLUDE 1 $\frac{1}{8}$ " FOR SWING DOOR HANDLES.


True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	78 $\frac{1}{8}$ x 29 $\frac{5}{8}$ x 78 $\frac{5}{8}$ inches 1985 x 753 x 1998 mm
SHELF SIZE (WD)	23 $\frac{7}{8}$ x 20 $\frac{5}{8}$ inches 607 x 524 mm
CAPACITY (20 OZ)	Standard Shelving: 12 Flat Shelves - 672 Shelving Options: 15 Flat Shelves - 840 <i>Trueflex</i> . (15) - 735
TRAILER LOADS	40' Container - 14, 48' Trailer Load - 17 53' Trailer Load - 19
CRATED WEIGHT (LBS)	635
HORSEPOWER	$\frac{1}{2}$
AMPS	9.3
DAILY KWH USAGE	6.27

DEPTH DOES NOT INCLUDE $\frac{3}{8}$ " FOR SLIDE DOOR HANDLES.


True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	78 $\frac{1}{8}$ x 29 $\frac{7}{8}$ x 78 $\frac{5}{8}$ inches 1985 x 759 x 1998 mm
SHELF SIZE (WD)	24 $\frac{1}{4}$ x 22 $\frac{1}{8}$ inches 616 x 562 mm
CAPACITY (20 OZ)	Standard Shelving: 12 Flat Shelves - 768 Shelving Options: 15 Flat Shelves - 960 <i>Trueflex</i> . (15) - 735
TRAILER LOADS	40' Container - 13, 48' Trailer Load - 16 53' Trailer Load - 17
CRATED WEIGHT (LBS)	630
HORSEPOWER	$\frac{1}{2}$
AMPS	9.3
DAILY KWH USAGE	4.9

DEPTH DOES NOT INCLUDE 1 $\frac{1}{8}$ " FOR SWING DOOR HANDLES.


True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	30 ⁷ / ₈ x 23 ⁷ / ₈ x 54 ⁷ / ₈ inches 783 x 606 x 1394 mm
SHELF SIZE (WD)	26 ⁹ / ₁₆ x 17 ¹ / ₂ inches 675 x 445 mm
SHELF TYPE	Standard Shelving: 4 Wire Shelves w/ <i>Trueflex</i> Pac
TRAILER LOADS	40' Container - 39, 48' Trailer Load - 45 53' Trailer Load - 51
CRATED WEIGHT (LBS)	260
HORSEPOWER	1/5
AMPS	2.1
DAILY KWH USAGE	TBD
DEPTH DOES NOT INCLUDE 2" FOR DOOR HANDLES.	



True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	36 x 21¼ x 55 inches 915 x 537 x 1397 mm
SHELF SIZE (WD)	31¾ x 14¾ inches 807 x 375 mm
SHELF TYPE	Standard Shelving: 4 Wire Shelves w/ <i>Trueflex</i> Pac
TRAILER LOADS	40' Container - 33, 48' Trailer Load - 39 53' Trailer Load - 44
CRATED WEIGHT (LBS)	TBD
HORSEPOWER	¼
AMPS	3.8
DAILY KWH USAGE	TBD
DEPTH DOES NOT INCLUDE 2" FOR DOOR HANDLES.	



True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	47¼ x 29⅞ x 78⅝ inches 1198 x 757 x 1996 mm
SHELF SIZE (WD)	21⅞ x 19½ inches 539 x 496 mm
SHELF TYPE	Standard Shelving: 8 Cantilever Shelves
TRAILER LOADS	40' Container - 16, 48' Trailer Load - 26 53' Trailer Load - 28
CRATED WEIGHT (LBS)	520
HORSEPOWER	½
AMPS	6.5
DAILY KWH USAGE	TBD
DEPTH DOES NOT INCLUDE 2" FOR DOOR HANDLES.	



True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	47 $\frac{1}{8}$ x 25 $\frac{1}{4}$ x 78 $\frac{3}{4}$ inches 1197 x 641 x 2000 mm
SHELF SIZE (WD)	21 $\frac{7}{32}$ x 14 inches 539 x 356 mm
SHELF TYPE	Standard Shelving: 8 Cantilever Shelves
TRAILER LOADS	40' Container - 22, 48' Trailer Load - 26 53' Trailer Load - 29
CRATED WEIGHT (LBS)	600
HORSEPOWER	$\frac{1}{2}$
AMPS	10.8
DAILY KWH USAGE	3.54

DEPTH DOES NOT INCLUDE 2" FOR DOOR HANDLES.

True
 REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	46 ⁷ / ₈ x 21 x 48 inches 1190 x 533 x 1217 mm
SHELF SIZE (WD)	21 ⁵ / ₁₆ x 12 ¹ / ₈ inches 542 x 308 mm
SHELF TYPE	Standard Shelving: 6 Wire Shelves
TRAILER LOADS	40' Container - 24, 48' Trailer Load - 30 53' Trailer Load - 33
CRATED WEIGHT (LBS)	TBD
HORSEPOWER	1/5
AMPS	2.0
DAILY KWH USAGE	TBD
DEPTH DOES NOT INCLUDE 2" FOR DOOR HANDLES.	



True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	47 $\frac{1}{8}$ x 21 $\frac{3}{4}$ x 53 $\frac{7}{8}$ inches 1197 x 550 x 1368 mm
SHELF SIZE (WD)	21 $\frac{5}{16}$ x 12 $\frac{1}{8}$ inches 542 x 308 mm
SHELF TYPE	Standard Shelving: 6 Cantilever Shelves
TRAILER LOADS	40' Container - 24, 48' Trailer Load - 30 53' Trailer Load - 33
CRATED WEIGHT (LBS)	390
HORSEPOWER	$\frac{1}{4}$
AMPS	8.8
DAILY KWH USAGE	TBD

DEPTH DOES NOT INCLUDE 2" FOR DOOR HANDLES.


 True
REFRIGERATION


MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	30 $\frac{1}{4}$ x 32 $\frac{1}{8}$ x 56 $\frac{3}{8}$ inches 769 x 816 x 1432 mm
SHELF SIZE (WD)	25 $\frac{1}{16}$ x 17 $\frac{1}{2}$ inches 653 x 445 mm
CAPACITY (20 OZ)	Standard Shelving: 3 Wire Shelves - 153 Shelving Options: <i>Trueflex</i> . (3) - 144
TRAILER LOADS	40' Container - 26, 48' Trailer Load - 30 53' Trailer Load - 34
CRATED WEIGHT (LBS)	315
HORSEPOWER	$\frac{3}{4}$
AMPS	11.2
DAILY KWH USAGE	10.03
USES 404A REFRIGERANT	



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	30 x 29 ¹ / ₄ x 80 ⁵ / ₈ inches 762 x 743 x 2048 mm
SHELF SIZE (WD)	25 ¹³ / ₁₆ x 15 ¹⁵ / ₃₂ inches 656 x 393 mm
CAPACITY (20 OZ)	Standard Shelving: 4 Cantilever Shelves - 234
TRAILER LOADS	40' Container - 24, 48' Trailer Load - 29 53' Trailer Load - 31
CRATED WEIGHT (LBS)	390
HORSEPOWER	3/4
AMPS	9.5
DAILY KWH USAGE	17.88

TRUE
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	30 x 29 $\frac{1}{4}$ x 80 $\frac{5}{8}$ inches 762 x 743 x 2048 mm
SHELF SIZE (WD)	25 $\frac{13}{16}$ x 15 $\frac{15}{32}$ inches 656 x 393 mm
CAPACITY (20 OZ)	Standard Shelving: 4 Cantilever Shelves - 234
TRAILER LOADS	40' Container - 24, 48' Trailer Load - 29 53' Trailer Load - 31
CRATED WEIGHT (LBS)	390
HORSEPOWER	$\frac{3}{4}$
AMPS	9.5
DAILY KWH USAGE	TBD
	



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	36 x 29 ¹ / ₄ x 80 ⁵ / ₈ inches 915 x 743 x 2048 mm
SHELF SIZE (WD)	32 x 15 ³ / ₈ inches 813 x 391 mm
CAPACITY (20 OZ)	Standard Shelving: 4 Wire Shelves - 275
TRAILER LOADS	40' Container - 26, 48' Trailer Load - 28 53' Trailer Load - 34
CRATED WEIGHT (LBS)	435
HORSEPOWER	1
AMPS	6.8
DAILY KWH USAGE	21.46
Requires 208-230/60Hz, single phase, NEMA 6-15R Uses 404A refrigerant	



True
REFRIGERATION



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	48 x 29 $\frac{1}{4}$ x 80 $\frac{5}{8}$ inches 1220 x 743 x 2048 mm
SHELF SIZE (WD)	44 x 16 $\frac{3}{4}$ inches 1118 x 426 mm
CAPACITY (20 OZ)	Standard Shelving: 4 Cantilever Shelves - 375
TRAILER LOADS	40' Container - 22, 48' Trailer Load - 26 53' Trailer Load - 29
CRATED WEIGHT (LBS)	540
HORSEPOWER	1
AMPS	12.0
DAILY KWH USAGE	TBD
Uses 404A refrigerant	



MODEL SPECIFICATIONS

CABINET DIMENSIONS (WDH)	72 x 29 $\frac{1}{4}$ x 81 $\frac{7}{8}$ inches 1829 x 743 x 2080 mm
SHELF SIZE (WD)	33 $\frac{1}{4}$ x 17 inches 845 x 432 mm
CAPACITY (20 OZ)	Standard Shelving: 8 Flat Shelves - 528
TRAILER LOADS	40' Container - 13, 48' Trailer Load - 16 53' Trailer Load - 17
CRATED WEIGHT (LBS)	805
HORSEPOWER	$\frac{3}{4}$
AMPS	12.5
DAILY KWH USAGE	TBD

Requires 208-230/60Hz, single phase, NEMA 6-20R

Uses 404A refrigerant


 True
REFRIGERATION


True®
MANUFACTURING CO., INC.



truemfg.com

2001 East Terra Lane
O'Fallon, MO 63366-4434
USA

t 636.240.2400

tf 888.818.8783

f 636.980.3541

Parts 800.424.8783

Parts fax 636.272.9471

e truesales@truemfg.com

Warranty +1 855 878 9277

Warranty fax +1 636 980 8510

Warranty email

warrantyinquiries@truemfg.com

Technical +1 855 372 1368

Technical email

service@truemfg.com

