


TD SERIES 3" DRAIN DIAMETER SPECIFICATION SHEET

The ThermoDrain™ is the latest technology in Drain Water Heat Recovery. Its unique design provides outstanding savings that can be attributed to its superior performance and durability. With its exclusive features, the ThermoDrain™ is simply the best technology available today!

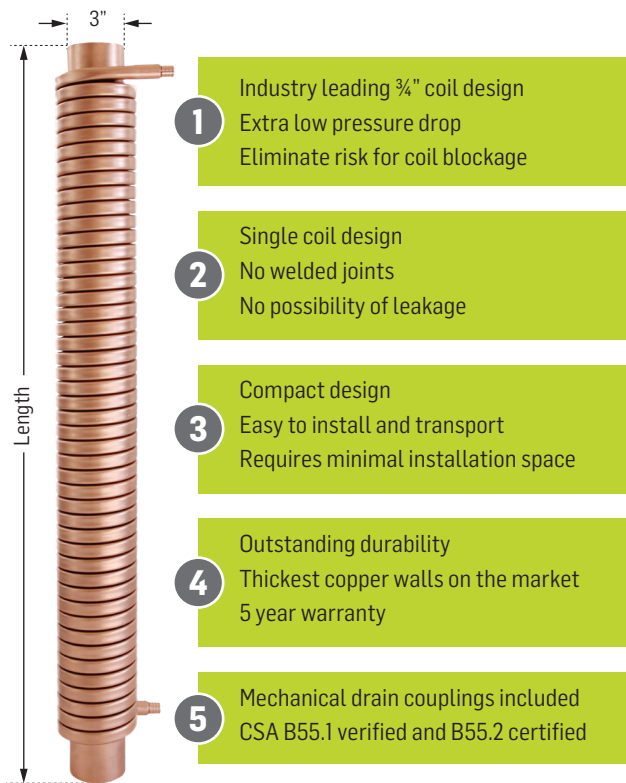

TECHNICAL CHARACTERISTICS

- Potable water tube: Made from Type "L" copper, certified to ASTM B88;
- Minimal copper coil diameter is 3/4", profiled in a "D" shape to maximize heat transfer and minimize pressure drop;
- Approved maximum pressure rating of 150psi (1035 kPa);
- Potable water connections are the required diameter to connect to the water feed for the application. [Standard diameters: 3/4", 1", 1 1/4", 1 1/2".]

DRAIN CENTER TUBE

- Made from DWV copper, conforms to ASTM 306;
- The nominal diameter is the same as the drainage pipe on which the device is installed. [Standard diameters: 3" and 4".]

CERTIFICATIONS

- The length of the heat exchanger is accordance with engineering drawings. [Standard length: 12" to 100".]
- The thermal effectiveness of the heat exchanger must be verified to CSA B55.1-15. [All models]
- The construction of the heat exchanger must be certified to CSA B55.2-15. [All models]
- Three potable water connection options are available:
 - factory installed crimp PEX fittings, certified to CSA B137.5 and ASTM F1807
 - factory installed cold expansion PEX fittings, certified to ASTM F1960
 - 3/4" male copper tubing

INSTALLATION

The drain water heat exchanger will be integrated into the plumbing system using mechanical joints. The heat recovery unit will be installed vertically, as recommended by the manufacturer.

ACCEPTED PRODUCT

ThermoDrain models TDXXXB from EcoInnovation Technologies inc. [See technical drawing sheet].

3" diameter specification sheet



Intertek Test Data Sheets

Original Test Data

Client: ECO Innovations Technology Inc. Engineer: Blaine Serio *BS*
 Job No.: G101070334 Tested By: Pocholo Lafortera *PL* Date: 24-April-2013

Product: Drain Water Heat Recovery Pipe Reviewed By: Rick Curkeet *RC* Date: June 17th, 2013


Model No.: TD336B, TD342B, TD348B, TD360B, TD372 Standard(s): CSA B55.1 Issued: 2012/07/01 Test Method for Measuring Efficiency and Pressure Loss of Drain Water Heat Recovery Units

Sample Control Number(s): 134000131, 134000129, 134000126, 134000119, 134000120

Model Number	Diameter (in)	Diameter (mm)	Length (in)	Length (mm)	Calculated Efficiency (%) @ 9.5 L/min	Calculated Pressure Loss (psi) @ 9.5 L/min	Heat Recover (kW)	Pressure Loss (kPa)	Mass (kg)
TD336B	3	76.2	36	914.4	39.2%	1.3	7.0	9.1	10.0
TD338B	3	76.2	38	965.2	40.4%	1.4	7.2	9.7	10.4
TD340B	3	76.2	40	1016	41.6%	1.5	7.5	10.3	10.9
TD342B	3	76.2	42	1066.8	42.8%	1.6	7.7	10.9	11.2
TD344B	3	76.2	44	1117.6	43.9%	1.7	7.9	11.5	11.9
TD346B	3	76.2	46	1168.4	45.0%	1.8	8.1	12.1	12.4
TD348B	3	76.2	48	1219.2	46.0%	1.8	8.2	12.7	13.0
TD350B	3	76.2	50	1270	47.0%	1.9	8.4	13.3	13.4
TD352B	3	76.2	52	1320.8	48.0%	2.0	8.6	13.9	14.0
TD354B	3	76.2	54	1371.6	48.9%	2.1	8.8	14.5	14.6
TD356B	3	76.2	56	1422.4	49.8%	2.2	8.9	15.0	15.2
TD358B	3	76.2	58	1473.2	50.7%	2.3	9.1	15.6	15.8
TD360B	3	76.2	60	1524	51.5%	2.3	9.2	16.2	16.5
TD362B	3	76.2	62	1574.8	52.3%	2.4	9.4	16.7	17.0
TD364B	3	76.2	64	1625.6	53.0%	2.5	9.5	17.3	17.7
TD366B	3	76.2	66	1676.4	53.7%	2.6	9.6	17.8	18.3
TD368B	3	76.2	68	1727.2	54.4%	2.7	9.7	18.4	18.9
TD370B	3	76.2	70	1778	55.0%	2.7	9.9	18.9	19.6
TD372B	3	76.2	72	1828.8	55.6%	2.8	10.0	19.5	20.3


3" diameter specification sheet

Efficiency vs water flow rate

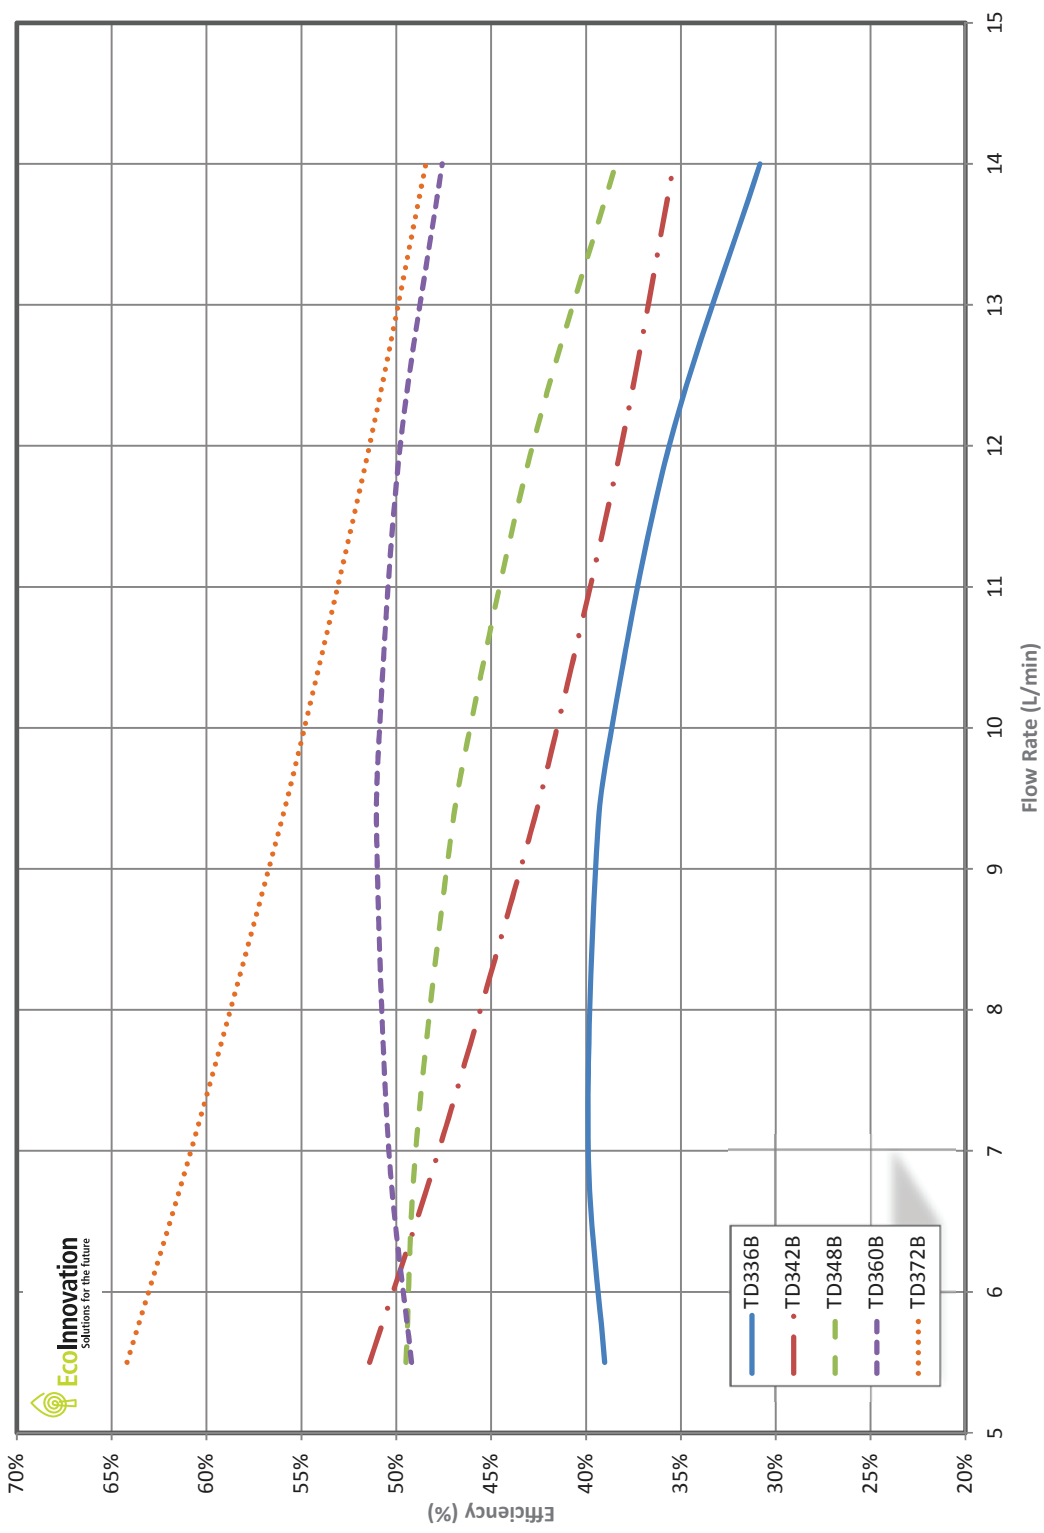


3" diameter specification sheet

Recovered energy vs water flow rate

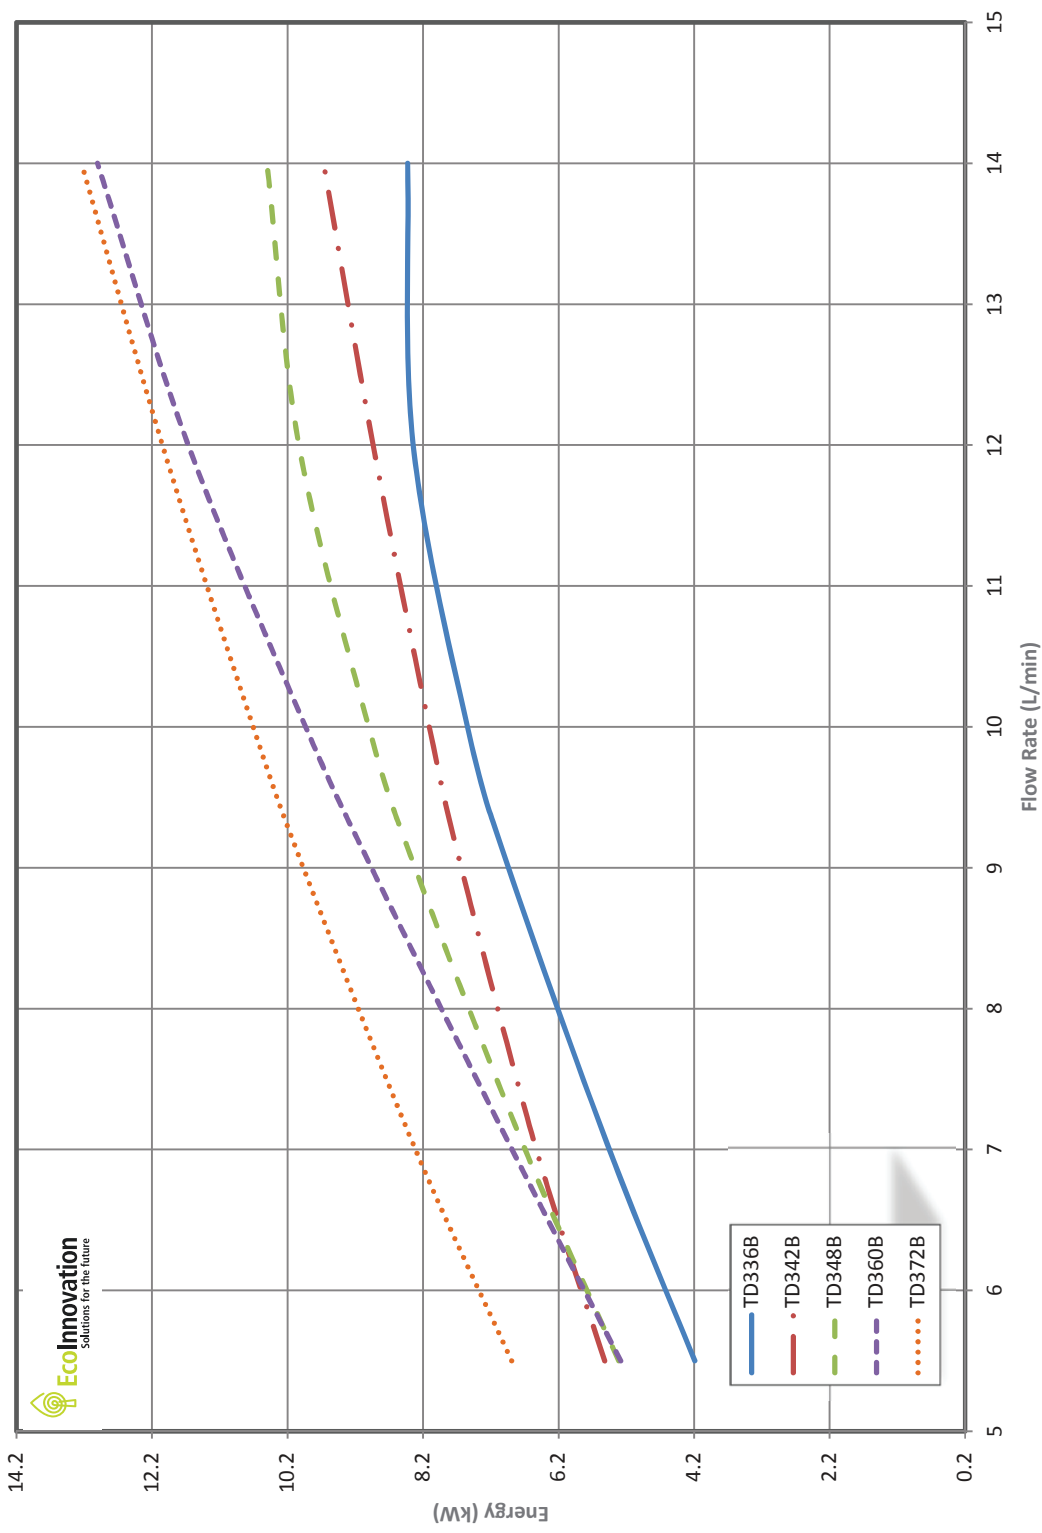

3" diameter specification sheet

Pressure drop vs water flow rate

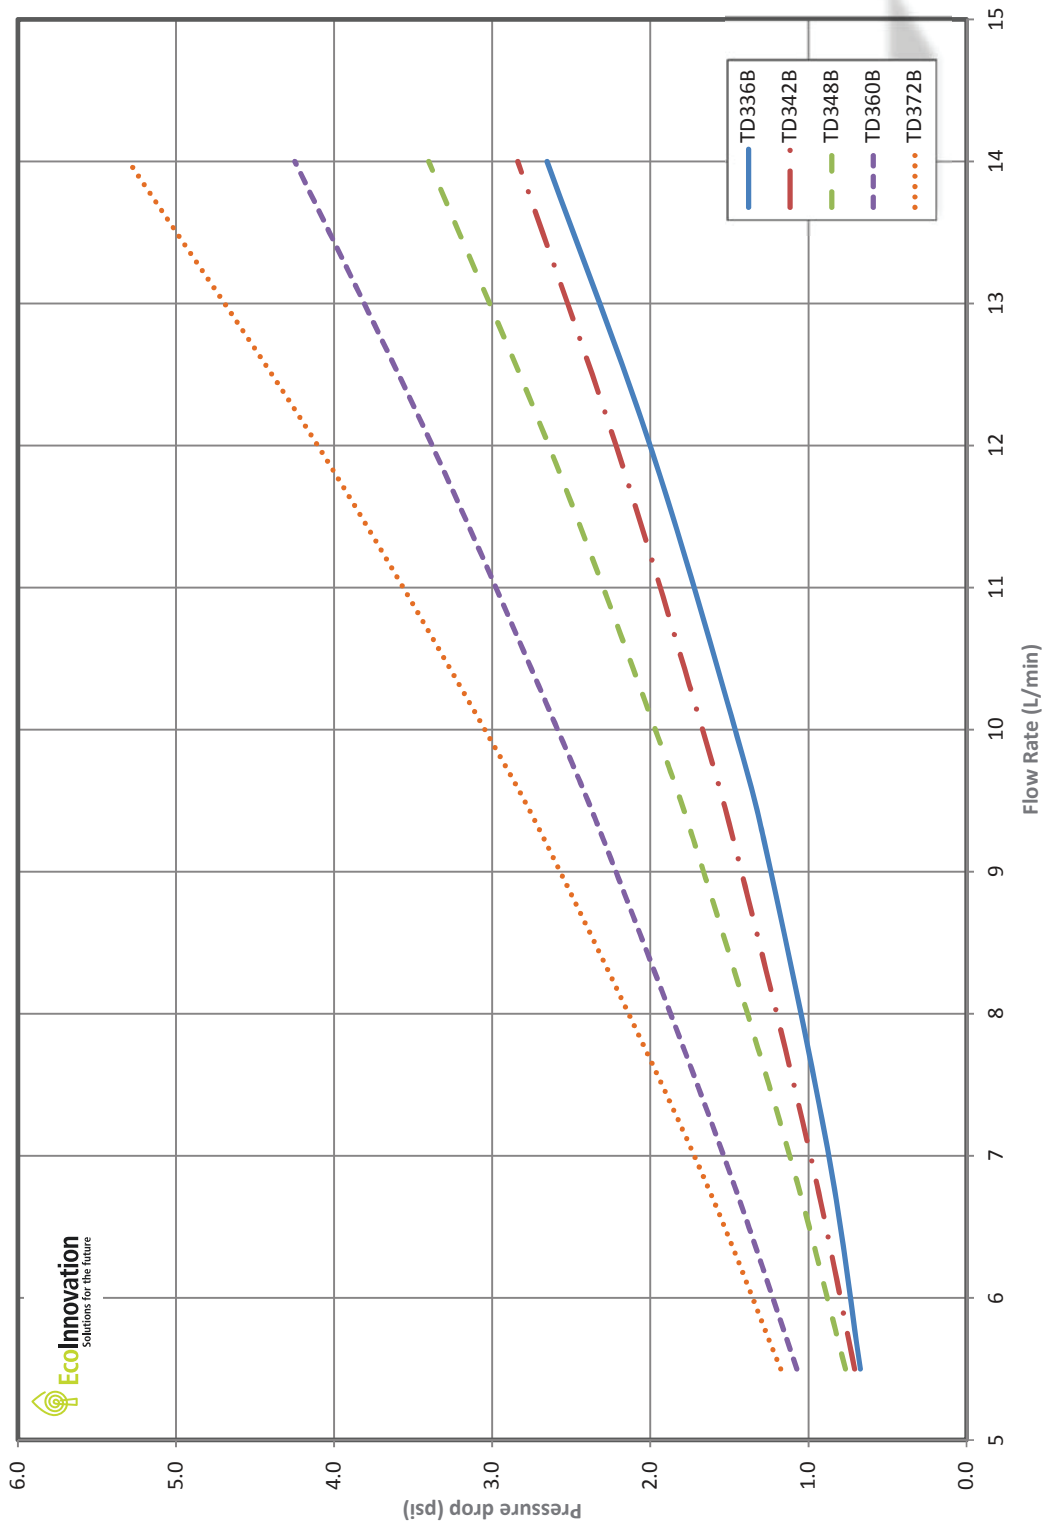

3" diameter specification sheet

MODEL/MODELE : TDH		3	B	
SERIES/SERIE		DRAIN DIA.	LENGTH/LONG. "L"	TUBE DIA.
		3"	32,0" - 62,0"	B = 3/4" CU
		SEE/VOIR Note A		
		OPTIONS		
		- DEFAULT MALE CU		
		DR=W/ DRAIN COUPLINGS		
		PEX=3/4" F1807 PEX		
		EXP=3/4" F1960 PEX		

NOTES:

- 1-THE DRAIN SECTION IS MADE FROM "COPPER DRAINAGE TUBE DWV" ASTM 306
- 1-LA SECTION DE DRAINAGE EST COMPOSÉE D'UN TUBE "COPPER DRAINAGE TUBE DWV" ASTM 306 EN CUIVRE
- 2-THE POTABLE WATER COIL IS MADE FROM TYPE "L" "SEAMLESS COPPER WATER TUBE" ASTM B-88
- 2-LA SECTION D'EAU POTABLE EST COMPOSÉE DE TUBE TYPE "L" "SEAMLESS COPPER WATER TUBE" ASTM B-88 EN CUIVRE
- 3-PEX FITTINGS IS CSA B137.5 AND ASTM F1807
- 3-ROCORD PEX CSA B137.5 ET ASTM F1807
- 4-UNIT MUST BE INSTALLED VERTICALLY. MAX. ALLOWANCE IS 1/8" PER LINEAR FEET.
- 4-L'INSTALLATION DOIT SE FAIRE DE MANIÈRE À CE QUE L'UNITÉ SOIT DANS UNE PENTE MAXIMALE DE 1/8" PAR PIED LINÉAIRE DE LA VERTICALE
- 5-GENERAL TOLERANCES ±1/4"
- 5-TOLÉRANCES GÉNÉRALES ±1/4"

A-32" TO 62" IN LENGTH ARE CSA B55.1 EFFICIENCY VERIFIED
 INDICATE OTHER LENGTH AS REQUIRED: 12" TO 72" AVAILABLE
 USE 3 DIGITS FOR LENGTH IN INCREMENTS OF 0.5" IN FEET
 A-32" À 62" EN LONGUEURS DISPONIBLES SELON CSA B55.1
 LONGUEURS DISPONIBLES SUR MESURE 12" À 72"
 UTILISER 3 CHIFFRES POUR LA LONGUEUR EN INCREMENTS DE 0.5"

POS.	DESCRIPTION
1	DRAIN INLET / ENTRÉE DU DRAIN
2	DRAIN OUTLET / SORTIE DU DRAIN
3	FRESH WATER INLET / ENTRÉE EAU POTABLE
4	FRESH WATER OUTLET / SORTIE EAU POTABLE

PROJECT / PROJET:		DATE:
APP:		
ECONNOVATION TECHNOLOGIES INC.		
231 RUE STE-MARIE, ST-LOUIS-DE-GONZAGUE, QC, J0S 1T0		
T: 1-888-881-1135 F: 1-888-889-1135		
REV	DATE	BY/PAR
1	March 20	MF
MODIFICATION		
TITRE:		
SHOP DRAWING		
DESSIN D'ATELIER		
DRAWING NO.: THERMODRAIN TDH SERIES		DESSIN NO.:
SCALE	1:8	1:8
REV.	B	1
DATE	01/01/20	1/1

