




### Features

- Relay with forcibly guided contacts according to IEC 61810-3
- Application type B and application type A (for VAR1 and VAR2)
- Protective separation (see insulation data)
- Suitable for print mounting
- Contact assembly  
SGR282 ZK: 2 CO,  
SGR282 ZK VAR1 / VAR2: 1 NO + 1 NC


### Dimensions

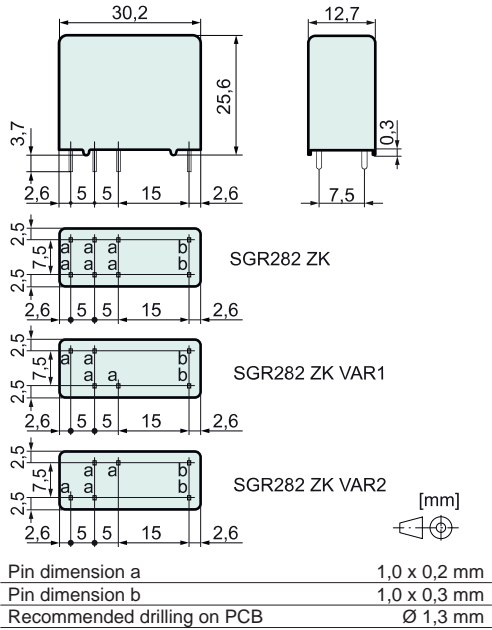

### Coil data at 20 °C

Nominal power (typ.)	0,70 W
Holding power (typ.)	0,21 W
Coil limit temperature	120 °C

Nominal voltage (VDC)	Min. Pick-up voltage (VDC)	Min. Drop-out voltage (VDC)	Nominal current (mA)	Resistance (Ohm)
5,0	3,8	0,5	140	36 (1 ± 10 %)
12,0	9,0	1,2	59	205 (1 ± 10 %)
18,0	13,5	1,8	39	462 (1 ± 10 %)
24,0	18,0	2,4	29	822 (1 ± 10 %)
48,0	36,0	4,8	15	3290 (1 ± 10 %)
60,0	45,0	6,0	12	5140 (1 ± 13 %)
110,0	82,5	11,0	6	17280 (1 ± 15 %)

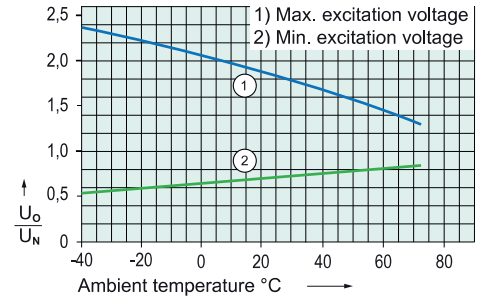


Test conditions:  
 - Graph 1: Contact current 4 A MAX  
 - Graph 2: without previous operation  
 - Free-standing relay on PCB  
 - Duty cycle 100%

### Contact data

Contact material	AgCuNi + 0,2, ..., 0,4 µm Au
Type of contact	Single contact with notched crown
Rated switching power	2000 VA
250 V / 8 A / AC-1 (max.)	
Electr. life time (0,1 Hz, rel. duty cycle 10%)	100 000
Inrush current	15 A for 20 ms
Switching voltage range	5, ..., 250 V DC / AC
Switching current range*	4 mA, ..., 8 A
Switching power range*	50 mW, ..., 2000 W (VA)
Contact resistance as new (max.)	100 mΩ
Short circuit resistance of NO contacts**	1 000 A with pre-fuse SCPD 10 A gG / gL (fuse)
Short circuit resistance of NC contacts**	1 000 A with pre-fuse SCPD 6 A gG / gL (fuse)

\* Reference values \*\* Prospective short-circuit current


### Electrical life (NO contacts)

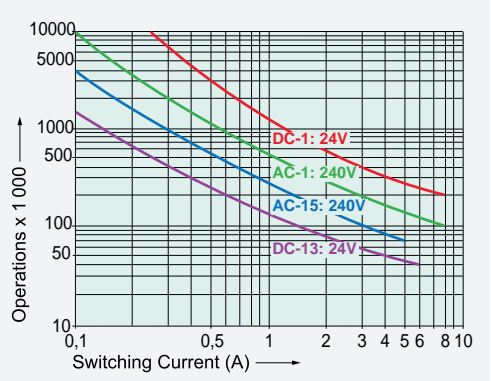


Switching capacity (IEC 61810-1)	240 V / 8 A MAX
AC-1:	240 V / 5 A MAX
AC-15:	24 V / 8 A MAX
DC-1:	24 V / 6 A / 0,1 Hz MAX
DC-13:	

Switching capacity (UL 508)	B300, R300
Continuous current per contact at load of: 1 or 2 contacts	8 A MAX

### Contact load limit curve (DC)

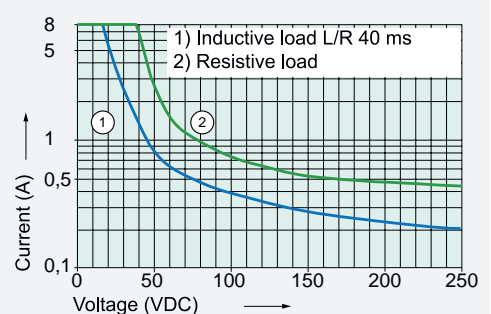

### Circuit diagram (top view)

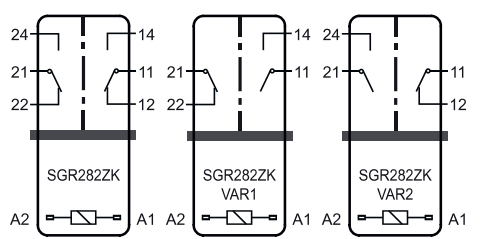

### Insulation data

Rated insulation voltage (IEC 60664-1)	250 VAC
Double or reinforced insulation	
- Air and creepage distance (min.)	5,5 mm
- Test voltage	4 000 V <sub>rms</sub> / 1 min
Double or reinforced insulation	
- Air and creepage distance (min.)	14 mm
- Test voltage	5 000 V <sub>rms</sub> / 1 min
Open contact: Test voltage*	1 500 V <sub>rms</sub> / 1 min
Creepage resistance	CTI 550
Pollution degree	2
Overvoltage category	III
Insulation resistance (min.)	100 MΩ
- Test voltage	500 VDC

\* Initial value

### Mechanical data

Mechanical lifetime (min.)	10 x 10 <sup>6</sup> operations
Switching frequency (max.)	15 Hz
Response time (NO closed) (typ.)	12 ms
Drop-out time (NC closed) (typ.)*	5 ms
Bounce time (typ.)	NO: 4 ms / NC: 8 ms
Shock resistance (16 ms) (min.)	NO: 10g / NC: 2,5g
Vibration resistance (10-200 Hz) (min.)	NO: 10g / NC: 1,5g
Weight	approx. 20 g
Mounting position	any
Mounting distance (min.)	5 mm

\* without coil wiring

### Other data

Ambient temperature	-40 °C, ..., +70 °C
Thermal resistance	50 K / W
Protection class	RT II
Solder bath temperature	270 °C / 5 s
Test method (heating)	A (group assembly)
Approvals	cULus, TÜV
Flammability class	UL 94 V-1
UL File	E188953 Sec.1

### Options, Accessories

Mounting rail socket	SRD SGR2, SRD SGR2A KV2, SRD SGR2A KV2 PIK
PCB socket	SRP SGR2
Other coil designs	possible

### Product key

SGR282 ZK	VAR1	24VDC	XX
SGR282 ZK	Type designation		
VAR1	Contact variant		VAR1, VAR2
24VDC	Nominal coil voltage		
XX	Options		