

DVLXG55SP

Double-Sided Direct-Vent Fireplace




FEATURES & BENEFITS

- Combustible material can be brought right up to the opening
- No special framing requirements
- Side exit flue allows for unobstructed views above fireplace
- Power vented for installation flexibility
- Remote control programmable LED under-lighting
- Multi-function remote control with variable flame height adjustment

SPECIFICATIONS


- Up to 45,000 BTUs (Nat)
- 53 1/2 x 24-inch ceramic glass viewing area
- 4 x 6-5/8-inch venting
- Requires power vent

DVLXG55SP

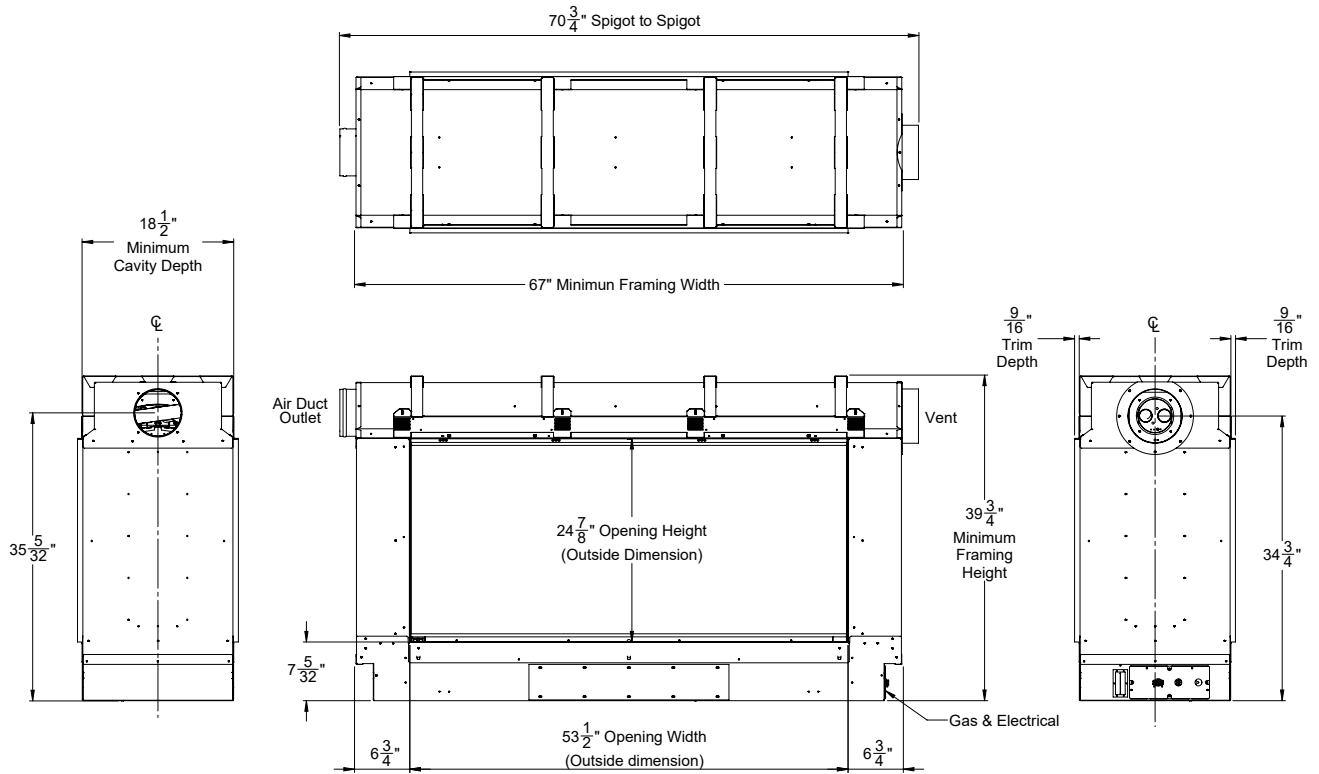

Framing Dimensions (in inches)

| | |
|------------|--------|
| Height (A) | 40 |
| Width (B) | 67 1/2 |
| Depth (C) | 18 1/2 |

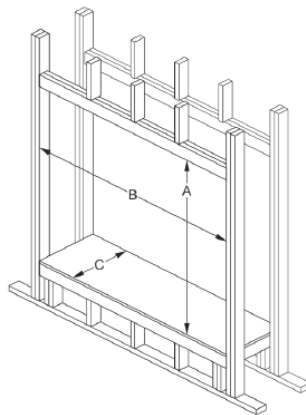

Empire is committed to continuous product improvement; specifications are subject to change without notice. Dimensions in this brochure are approximate; read and follow the framing dimensions in the owners manual supplied with your Empire product. Flame size, shape, and color will vary from photos. Our mantels feature natural veneers and hand-rubbed finishes – wood grain and color will vary. Adjust light levels and use "natural light" incandescent bulbs to enhance the dramatic look for your wooden mantel.

Member of the following industry associations:



This appliance is design-certified to the ANSI standard by:



A Division of
 Empire Comfort Systems Inc.
 918 Freeburg Ave.
 Belleville, IL 62220-2623
 info@empirecomfort.com
 10/19

The Plaza name and logo is a registered U.S. trademark.