

# ZELLIGE™ NEO

GLAZED CERAMIC WALL

WALL

# MARAZZI

DARE TO BE BOLD™

WALL



# ZELLIGE™ NEO

Inspired by ancient Moroccan tiles, Zellige blends North African tradition with industrial ceramics. The undulated surface and variation in color tones accentuates the natural imperfections and hand-crafted look of Zellige. Its glossy finish and visible variation creates a blend effect in which the color vibrates strongly. Offered in an array of 10 beautiful shades, these 4x4 tiles have the power to transform any space.



COVER PHOTO: SALVIA  
ABOVE PHOTO: CHINA

WALL

# ZELLIGE™ NEO

GLAZED CERAMIC WALL

# MARAZZI®

DARE TO BE BOLD™

FINISHES: GLOSSY

### USAGE



### MATERIAL



### PRICING



### SPECIAL FEATURES



WALL

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

## WALL TILE



ZL11 Gesso



ZL07 Lana



ZL08 Argilla



ZL02 Salvia



ZL01 Turchese




ZL04 Cielo




ZL03 Bosco



ZL05 Petrollio

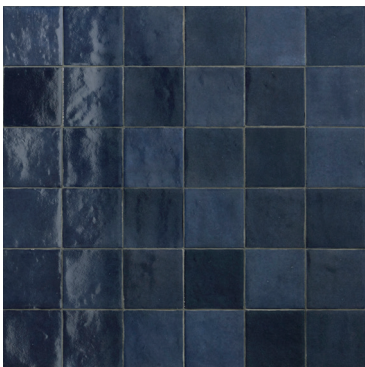

ZL06 China

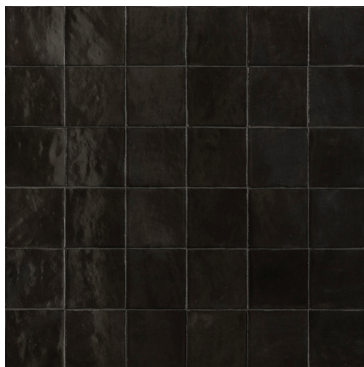

ZL12 Carbone



STAINPROOF



DENTPROOF



FIRE-RESISTANT



SIMPLICLEAN™

VISIT [MARAZZIUSA.COM/WHYTILE](http://MARAZZIUSA.COM/WHYTILE) FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.
















# ZELLIGE™ NEO

GLAZED CERAMIC WALL

# MARAZZI

DARE TO BE BOLD™


FINISHES: GLOSSY

|  |  |  |                         |
|--|--|--|-------------------------|
| <b>USAGE</b>   | <b>MATERIAL</b>  | <b>PRICING</b>   | <b>SPECIAL FEATURES</b> |
|  FLOOR<br> WALL<br> COUNTERTOP<br> SHOWER FLOOR<br> EXTERIOR FLOOR |  CG<br><small>LOW</small> <small>HIGH</small> |  STEPWISE™<br> TRUEDGE™<br> MADE IN THE U.S.A.<br> LARGE FORMAT<br> MOSAIC/DECO<br> ENCAUSTIC<br> TERRAZZO<br> PAVER<br> CUSTOMIZE |                         |


WALL

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

## SIZES

|  |                 |                                     | Thickness       | Sq. Ft./ Carton | Pieces/ Carton |
|--|-----------------|-------------------------------------|-----------------|-----------------|----------------|
|  | 4 x 4 Wall Tile | 3-3/4" x 3-3/4" (9.85 cm x 9.85 cm) | 5/16" (9.50 mm) | 7.98            | 76             |

## APPLICATIONS




|  | Target DCOF wet | Suitable  |
|--|-----------------|---|
| Dry & Level - Interior Floor   | N/A             |   |
| Wet & Level - Interior Floor   | ≥ 0.42          |   |
| Shower Floors (Residential or Light Commercial)  | ≥ 0.42          |   |
| Exterior Floor Applications (including pool decking & other wet areas with minimal footwear) | ≥ 0.60          |   |
| Ramps & Inclines   | ≥ 0.65          |   |
| Walls/Backsplashes   | N/A             |  |
| Countertops  | N/A             |   |
| Pool Linings   | N/A             |   |

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [marazziusa.com/DCOF](http://marazziusa.com/DCOF).

### APPLICATION NOTES:

Suitable for exterior wall applications in non-freezing climates only, when proper installation methods are followed.

## INSTALLATION

| Grout Joint Recommendation | Shade Variation   |
|----------------------------|---|
| 1/8"                       |  V2 Medium Variation (ZL11 & ZL12)                       |
|                            |  V3 High Variation (ZL01, ZL02, ZL03, ZL04, ZL05 & ZL06) |
|                            |  V4 Random Variation (ZL07 & ZL08)                       |

## PERFORMANCE CHARACTERISTICS

|                     | ASTM# | Wall Result   |
|---------------------|-------|---------------|
| Water Absorption    | C373  | < 20.0%       |
| Breaking Strength   | C648  | 120 - 230 lbs |
| Scratch Hardness    | MOHS  | 4.0 - 6.0     |
| Chemical Resistance | C650  | Resistant     |




For additional information on test results, visit us at: [marazziusa.com/information/TestResults](http://marazziusa.com/information/TestResults).

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: [marazziusa.com/Factors](http://marazziusa.com/Factors).

## FEATURES

|   |   |   |                    |
|---|---|---|--------------------|
|  | PRE-CONSUMER RECYCLED MATERIALS           |  | MADE IN THE U.S.A. |
|  | ZEROTOX<br>Healthy Homes   Healthy Planet |   |                    |

All or select items within this series meet the requirements for these qualifications. For more information visit [marazziusa.com](http://marazziusa.com).