


**D.C. POWER SUPPLY
MULTI - OUTPUT (QUAD)
NEW MODELS
3003-4 & 3005-4**

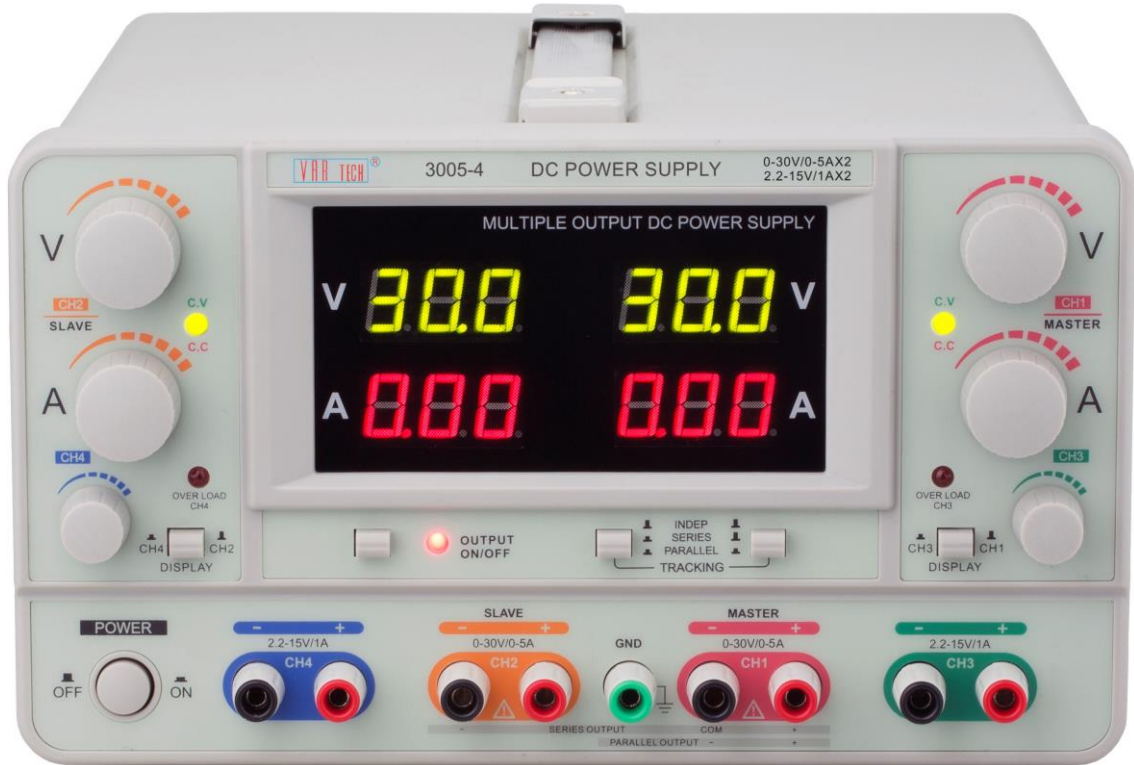

- **FOUR INDEPENDENT DC OUTPUTS (Ch.1 to Ch.4) WITH CV & CC OUTPUT IN Ch.1 & Ch.2**
- **PRESET VOLTAGE & CURRENT WITH OUTPUT ON/OFF SWITCH PROVIDED IN FRONT PANEL**
- **FOUR L.E.D., D.P.M.s., FOR DISPLAY OF 'V' & 'I' OF TWO SELECTABLE CHANNELS**

SPECIFICATIONS

MODEL >>		3003-4	3005-4
Output	Ch. 1 & 2	0 ~ 30V / 0 ~ 3 A	0 ~ 30V / 0 ~ 5 A
	Ch. 3 & 4	2.2 ~ 15 V / 1 A	
Line regulation (Ch. 1 & 2)	CV	≤ 0.01% + 3 mV	
	CC	≤ 0.2 % + 3 mA	
Load regulation (Ch. 1 & 2)	CV	≤ 0.01 % + 3 mV	≤ 0.02 % + 5 mV
	CC	≤ 0.2% + 3 mA	≤ 0.2 % + 5 mA
Ripple & Noise (Ch. 1 & 2)	CV	≤ 1 mV rms	≤ 2 mV rms
	CC	≤ 3 mA rms	≤ 6 mA rms
Load Reg., Ripple & Noise (Ch. 3 & 4)	≤ 25 mV / ≤ 2 mV rms (220 V AC I/P)		
Protection	Over load and reverse polarity protection.		
Display (Voltage & Current)	3 digits LED display		
Display Resolution	100 mV / 10 mA		
Display Accuracy	Real voltage and current output: ± (1% reading + 2 digits)		
	Preset voltage and current: ± (1% reading + 8 digits)		
Operating environment	0 °C ~ 40 °C, ≤ 80% RH		
Power source	AC110V/220V±10% selectable, 50/60Hz		
Accessories	Power cord, Operation manual & O/P Leads.		
Dimension	250 W x 150 H x 310 D (mm)		
Weight		8.5 Kg.	10 Kg.

* All Specifications & appearances are subject to change without prior notice.