

290W

MHD Flexi Solar Panel

– rear exit

Part code: STPVFU290R

The 290w MHD Flexi solar panel combines shingled monocrystalline solar cells to deliver super efficient power generation with a tough ETFE top sheet for longevity and robust impact resistance.

At just 2mm thick, this ultra-lightweight panel is ideal for flat roofs as well as surfaces with a slight curve making it the perfect choice for camper vans and boat decks.

To ensure long term performance in the most extreme environments, the panels are tested to ASTM B117 - ISO9227 for saltwater spray over 1000 hours as well as accelerated Ultraviolet (UV) testing to ISO 4892.

The 290w solar panel comes with 2 x 0.9m connection cables fitted with MC4 connectors and 2 x 3m cable with MC4 connectors so the panels can be easily joined together to create a solar array. The panel is supplied with a 4-year module warranty.

A charge controller should be used with this panel to protect the battery from being overcharged and to prevent reverse of current drain.

For optimum battery performance, pair your panel with a **Lifos Go advanced lithium battery**. Connect up to four Lifos batteries in parallel or series to increase the current or voltage.

For further information from our Technical Team, please contact support@solartechonology.co.uk




SPECIFICATIONS


Size	1650x890x2mm
Weight (Kg)	4.6
*Watts per day (W)	1740
*Amp hours per day (A)	63.54
Charge controller	20Ah
Vmp (VDC) nominal voltage	27.4V
Imp (A) nominal current	10.59A
Voc (V)	32.30V
Isc (A) short circuit current	11.22A

**Watts and Amp hours/day based on six hours of average daily peak sunshine hours.*

STPVFU290R

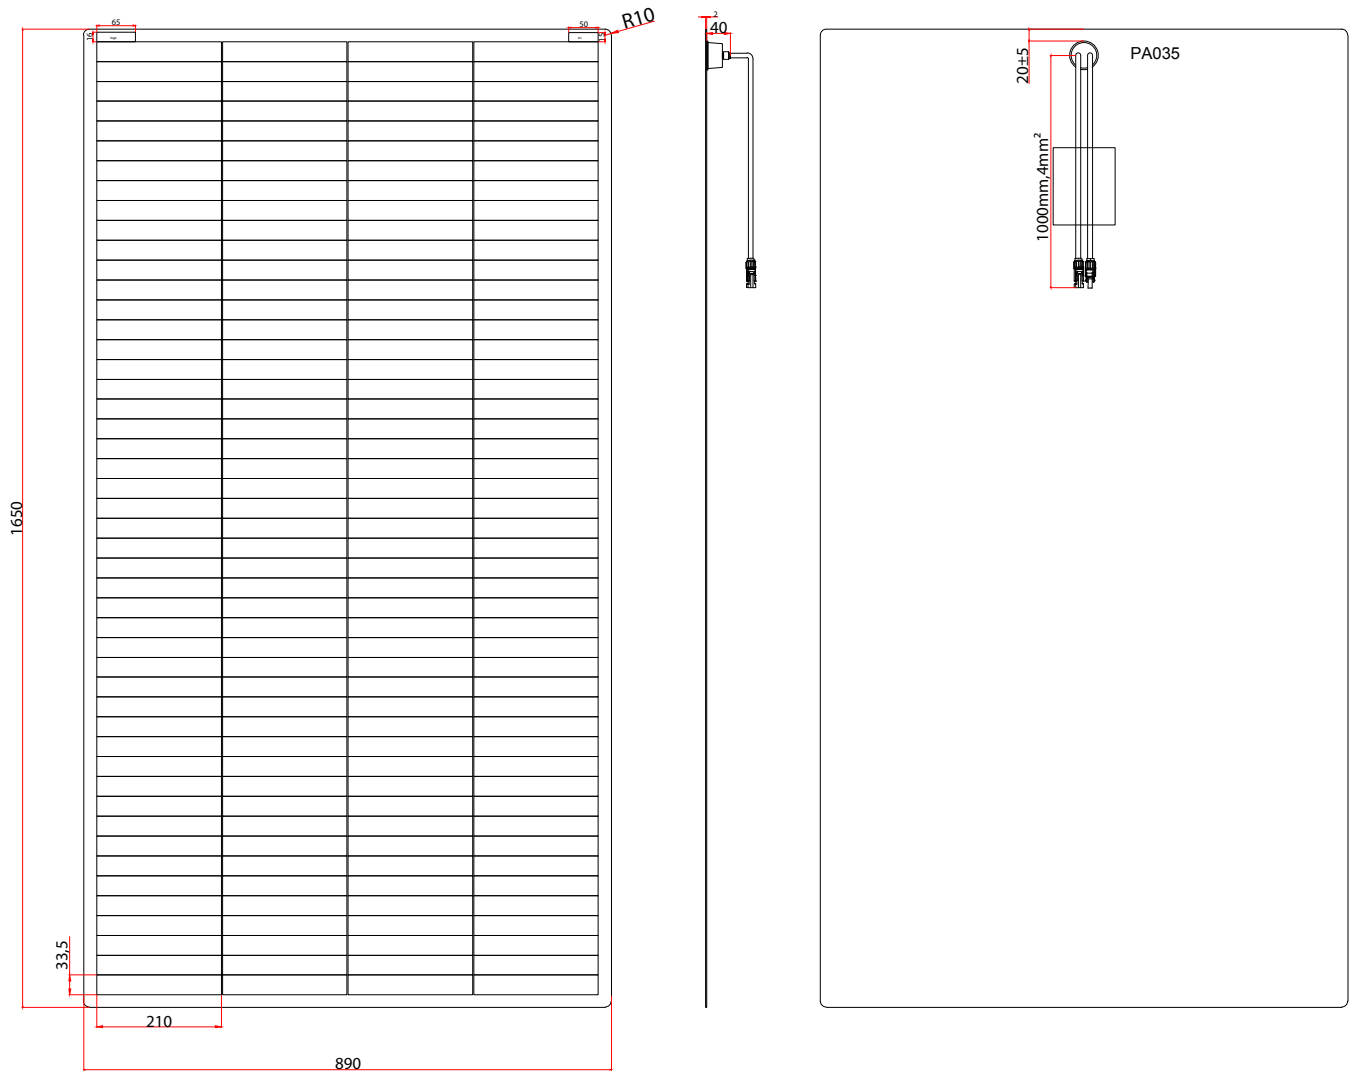

4*48 290W 27.4V(++) 890*1650*2mm

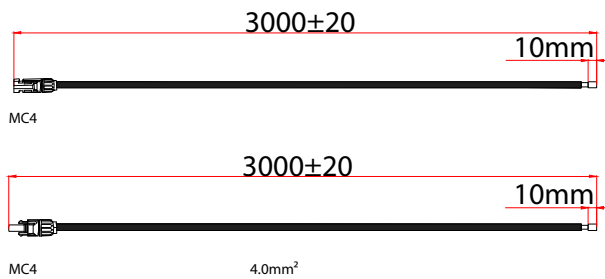

Solar
Technology
International

Unit 6, Station Drive, Bredon, Gloucestershire GL20 7HH
 T 01684 774 000 F 01684 773 000
 sales@solartechnology.co.uk www.solartechnology.co.uk