


Specifications

Insulation Material: Polyamide
 Contact Material: Tin Plated Copper
 Operating Temperature: -40°C to +105°C

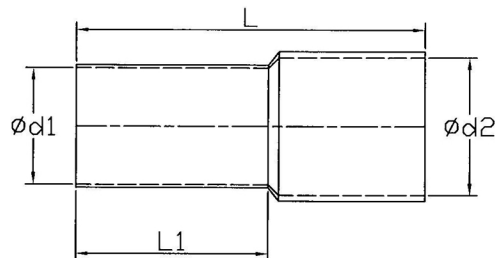

CAT.NO.	DIMENSIONS(mm)			
	L	L1	Ød1	Ød2
CE001406	10±2.0	6±0.6	0.70±0.2	1.6±0.3
CE001408	12±2.0	8±0.6		
CE002506	10±2.0	6±0.6		
CE002508	12±2.0	8±0.6	0.75±0.2	1.9±0.3
CE003406	10±2.0	6±0.6		
CE003408	12±2.0	8±0.6		
CE005006	12±2.0	6±0.6	1.00±0.2	2.6±0.3
CE005008	14±2.0	8±0.6		
CE005010	16±2.0	10±0.6		
CE007506	12±2.0	6±0.6	1.20±0.2	2.8±0.3
CE007508	14±2.0	8±0.6		
CE007510	16±2.0	10±0.6		
CE007512	18±2.0	12±0.6	1.40±0.2	3.0±0.3
CE010006	12±2.0	6±0.6		
CE010008	14±2.0	8±0.6		
CE010010	16±2.0	10±0.6	1.70±0.3	3.5±0.3
CE010012	18±2.0	12±0.6		
CE015008	14±2.0	8±0.6		
CE015010	16±2.0	10±0.6	2.20±0.3	4.2±0.3
CE015012	18±2.0	12±0.6		
CE015018	24±3.0	18±0.6		
CE025008	14±2.0	8±0.6	2.80±0.3	4.8±0.5
CE025010	16±2.0	10±0.6		
CE025012	18±2.0	12±0.6		
CE025018	24±3.0	18±0.6	3.50±0.4	6.3±0.5
CE040010	17±2.0	10±0.6		
CE040012	20±2.0	12±0.6		
CE040018	26±3.0	18±0.6		
CE060012	20±2.0	12±0.8		
CE060018	26±3.0	18±0.8		