

Flo Q 150

LL1340023

Lombardo.



Technical information:

Installation:	Wall, Ceiling
Material:	Aluminium
Finish:	Dark Grey RAL 7021
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	>80
LB Factor 50.000 h:	L80B20
Photobiological risk:	RG0
Power consumption (Watt):	10
Lumen:	900
Real Lumen:	481
Power supply:	✔ integrated
LED:	220-240 V
Circuit breaker	36-44-52-65
B10 - C10 - B16 - C16	
Insulation class:	⊖ CL.I
Type of protection:	IP 20
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK CA



Flo Q 150

LL1340023

Lombardo.



Installation images:




Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - F 0039 035 939 496 - E info@lombardo.it

lombardo.it

Lighting simulation:

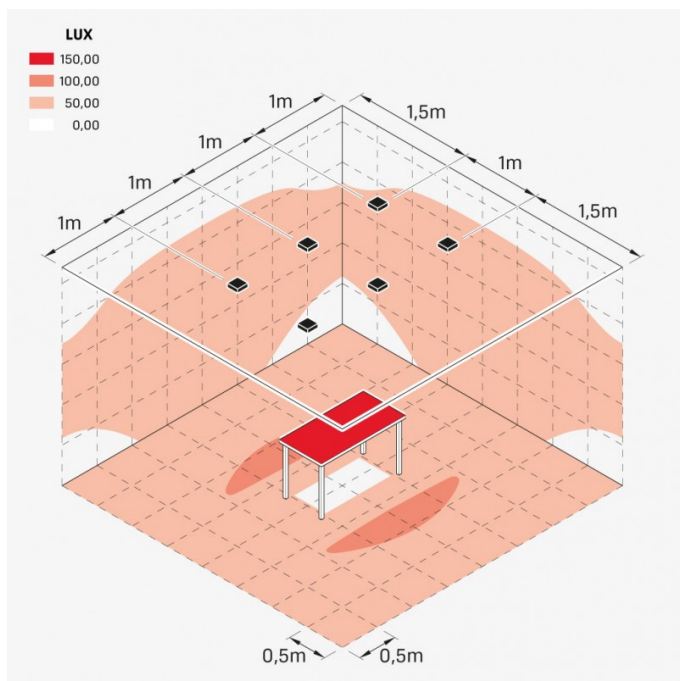

Flo_Q_150