

FLOS


F3452009 White

Kelvin Edge Base

Designed by Antonio Citterio, 2015

7W - 306lm - 2700-3200K - CRI> 90

Adjustable table lamp providing direct light. Aluminium painted or chromed body, with die cast head, joints and forks, and extruded arms. Diffuser in photoengraved polycarbonate and aluminate on the perimeter. Edge Lighting technology light source. Optical switch sensor placed on the head that provide 3-step dimming function and color temperature adjustment at 2700K or 3200K. Power cord length 150 cm. Plug-in power supply with interchangeable plugs.

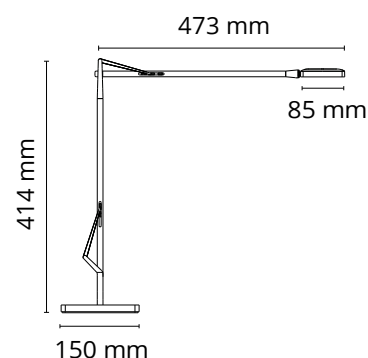

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

| | |
|-------------------|---------------------|
| EAN | 8059607004579 |
| Mounting | Table |
| Environment | Indoor dry location |
| Light source type | LED |
| LED type | LED Module |
| Lamp holder | LED Module |
| Power (W) | 7 |
| System flux (lm) | 306 |

Physical

| | |
|---------------------|-------|
| Colour | White |
| Net weight (kg) | 3.9 |
| Package volume (m3) | 0.02 |
| IP | 20 |

Download

| | |
|-----------------------|------------------------------|
| Mounting instructions | Download PDF |
| Mounting instructions | Download PDF |
| Mounting instructions | Download PDF |
| Spare Parts | Download PDF |

Photometric Files


| | |
|-----------|------------------------------|
| LDT / IES | Download LDT |
|-----------|------------------------------|

Technical Drawings

| | |
|----|------------------------------|
| 2D | Download ZIP |
|----|------------------------------|



Schematic light drawing



Photometric

| | |
|--------------------|-----------|
| Lighting type | Direct |
| Light distribution | Symmetric |
| CCT (K) | 2700-3200 |
| CRI> | 90 |

Electrical


| | |
|--------------------|------------------------|
| Insulation class | III |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 100-240/24 |
| Driver | Remote included |
| Dimming type | Electronic 24V |
| Plug type | Type G, Type A, Type C |
| Batteries inside | No |
| Charging min time | No |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

Spare Parts



F3450009

Kelvin edge white body



F3451009

Kelvin edge white base



RF3320200

White plug assembly kit & 24V driver