



PM-98 Platinum

Condenser Microphone 电容麦克风（白金版）

34mm Diaphragm
大口径电容传声单元
High Performance
高性能电声转换
Smooth Response
平顺响应
Ultra low Noise
极低噪声

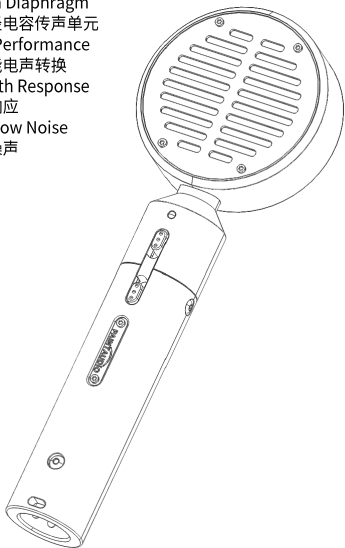

PAINTAUDIO

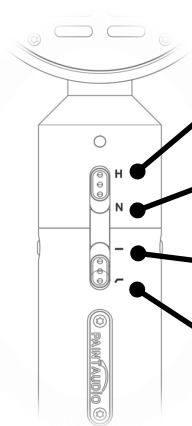

High level output

高增益输出

Normal level output

常规输出

Flat response

平坦响应

Low-cut response

低频削弱

PM-98

PAINTAUDIO

Specifications 指标参数

Diaphragm	34mm
Directional pattern	Cardioid
Frequency range	18 Hz - 22kHz
Sensitivity @ 1 kHz	24 mV/Pa
Equivalent noise level	7.5 dB -A
SNR A-weighted	79 dB
Maximum SPL THD 1%	135 dB
Maximum output	15 dBu
Phantom voltage	24 V - 50 V
Current consumption	4 mA
Connector	XLR
Weight	approx. 200 g
Head diameter	59 mm
Body diameter	25 mm
Length	172 mm

* All above under normal output and flat response selection

PM-98

PAINTAUDIO

Instructions 注意事项

Avoid falling

精密内部传感器 避免跌落

Keep distance from the speaker

Starting from lower output and minimum input

保持与音箱的距离

试音从低档输出和最小后级输入开始

Use windscreen to avoid peak noise

使用防喷网减弱气流冲击噪声

Keep inside clean and avoid dust entering

保持内部清洁 防止灰尘落入影响音色

Electrostatic sensitive

静电敏感

Turn off phantom power when not used

不用时关闭幻象供电

* All data are tested in the PaintAudio acoustic Lab.

* The company reserves the right to make changes in the specifications and other information contained in this document without prior notification.

保修卡 Warranty

型号 Model	
用户签名 Signature	
日期 Date of Sales	
地址 Address	
序列号 SN	
经销商 Distributor	
发票号 Invoice No.	
其它备注 Others	

本产品自购买之日12个月内享受免费维保服务。以下情形除外: 不可抗力损坏; 人为损坏; 私自拆修; 法规约定的其它情形。

This product enjoys free maintenance service within 12 months from the date of purchase. Except for the following situations: force majeure damage; man-made damage; unauthorized dismantling and repair; other circumstances stipulated by laws and regulations.

 PAINTAUDIO



合格证
QUALIFICATION

型号 MODEL	
检验 CHECKER	
日期 DATE	


PAINTAUDIO