

RECTANGULAR DINING TABLE

ASSEMBLY MANUAL

Thank you for choosing our rectangular dining table! This table is designed for durability, weather resistance, and low maintenance, making it a great addition to both indoor and outdoor spaces. To ensure long-lasting use and maintain its quality, please read and follow the usage precautions below.

ATTENTION



Usage Precautions

- **Heat Resistance:** The table can withstand temperatures between -104°F to -140°F (-40°C to -60°C) . Avoid placing high-temperature objects (such as grills or hot pots) directly on the surface to prevent damage. Using heat-resistant mats is recommended.
- **Avoid Prolonged Sun Exposure:** While our table is weather-resistant, extended exposure to strong sunlight may cause fading or slight warping. Covering the table with a cloth or protective cover when not in use is advised.
- **Prevent Scratches:** Avoid using sharp objects such as knives directly on the table surface to prevent scratches.

PARTS LIST

TOOLS REQUIRED



ALLEN WRENCH
(PROVIDED)



Open-end wrench
(PROVIDED)

ASSEMBLY REQUIREMENT




2 PERSON
ASSEMBLY



UP TO 30 MIN.
ASSEMBLY


PARTS LIST

A




2 PCS

B




2 PCS

C




2 PCS

D




1 PC

E




1 PC

F



2 PCS

G



M6 * 75 mm

2 PCS

H



M6 * 55 mm

8 PCS

J



M6 * 35 mm

12 PCS

L



M6 * 12 mm

8 PCS

N



M6





2 PCS


Step 1 Use screw G and nut N to connect panel E and panel D.

Note:



If part E is correctly connected, you will see the 4 silver screw heads in the middle of the table.

Please check it before installing.



E		1
D		1
G	 M6 * 75	2
N	 M6	2

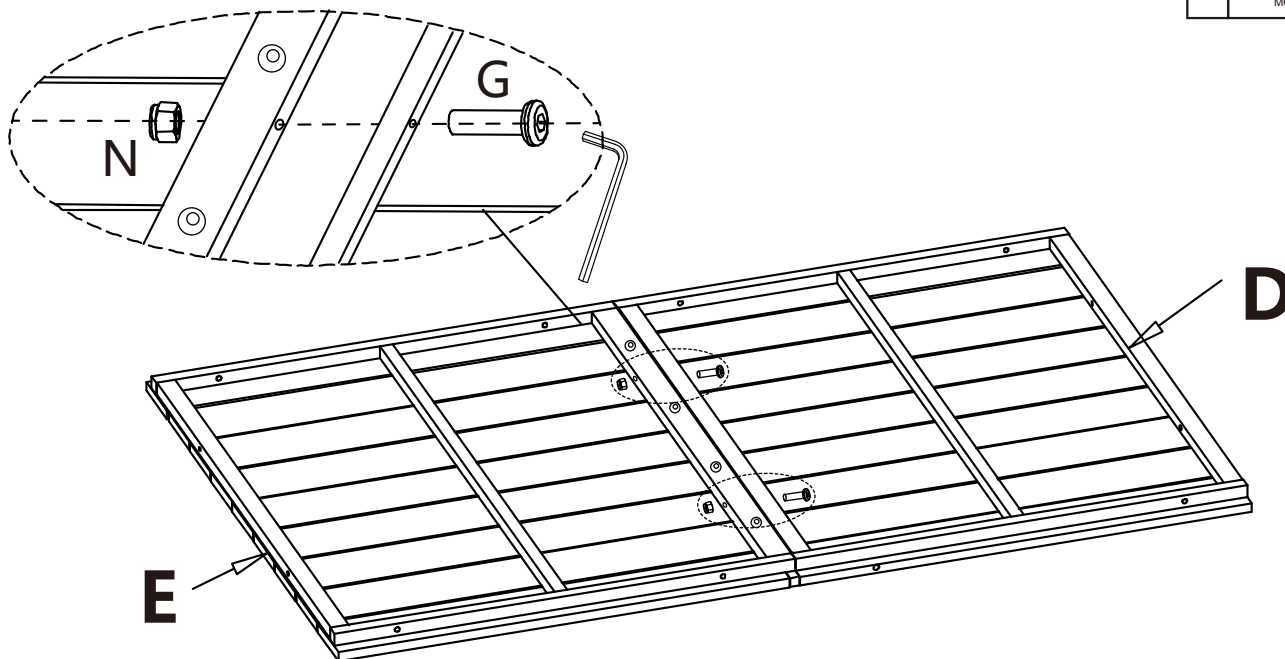





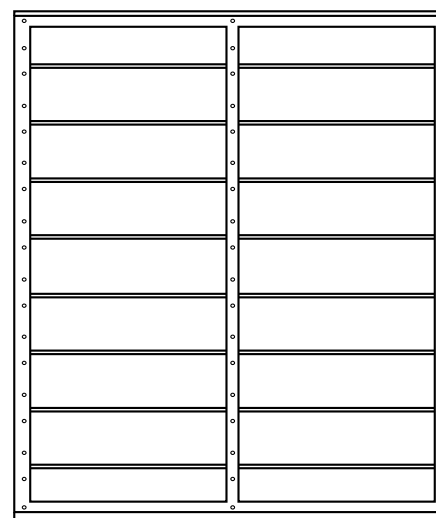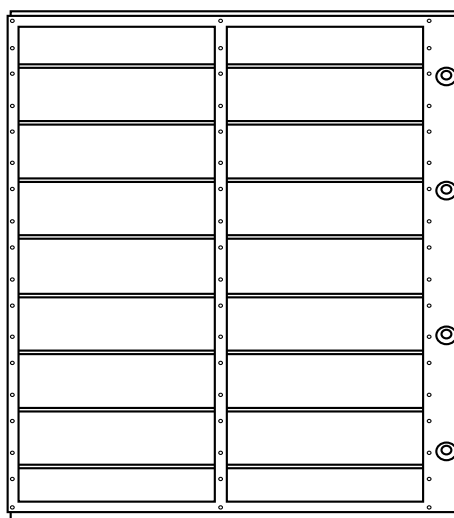- A** If part E is correctly connected, you will see the 4 silver screw heads in the middle of the table.

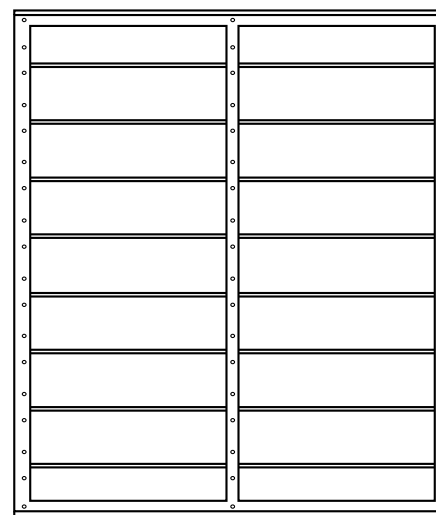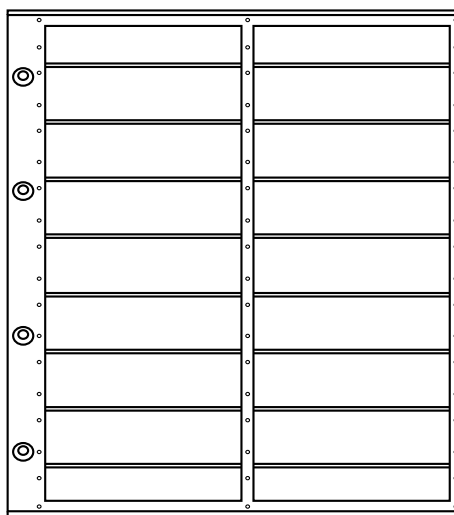


- B** If part E is incorrectly connected, you will see the 4 silver screw heads on the side of the table, and you will have a problem on the next step.








- Step 2** 1) Stand parts C and Cupright at a 90-degree angle to the ground or easier installation.
2) Insert one end of part F into part C, align the holes, and secure it with two L screws.

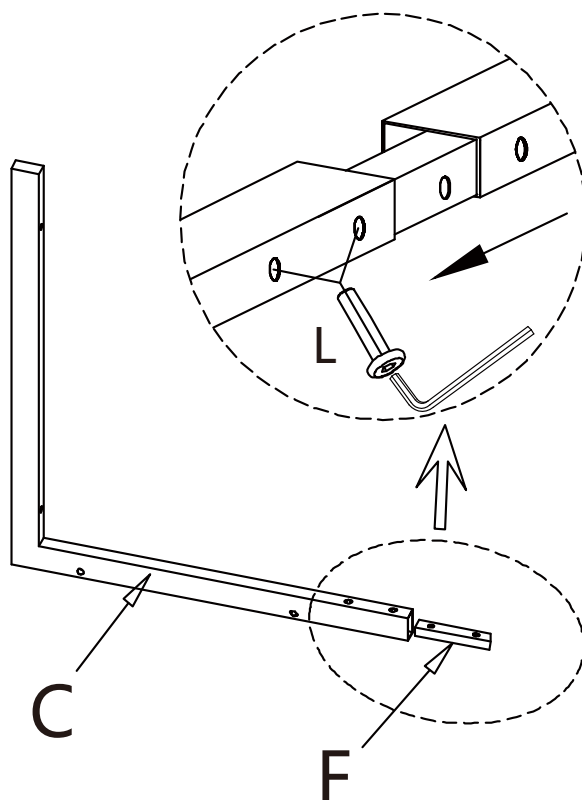F		2
B		2
C		2
L	 M6 * 12	8




- Step 3** Insert the other end of part F into part B, align the holes, and secure it with two L screws

F		2
B		2
C		2
L	 M6 * 12	8

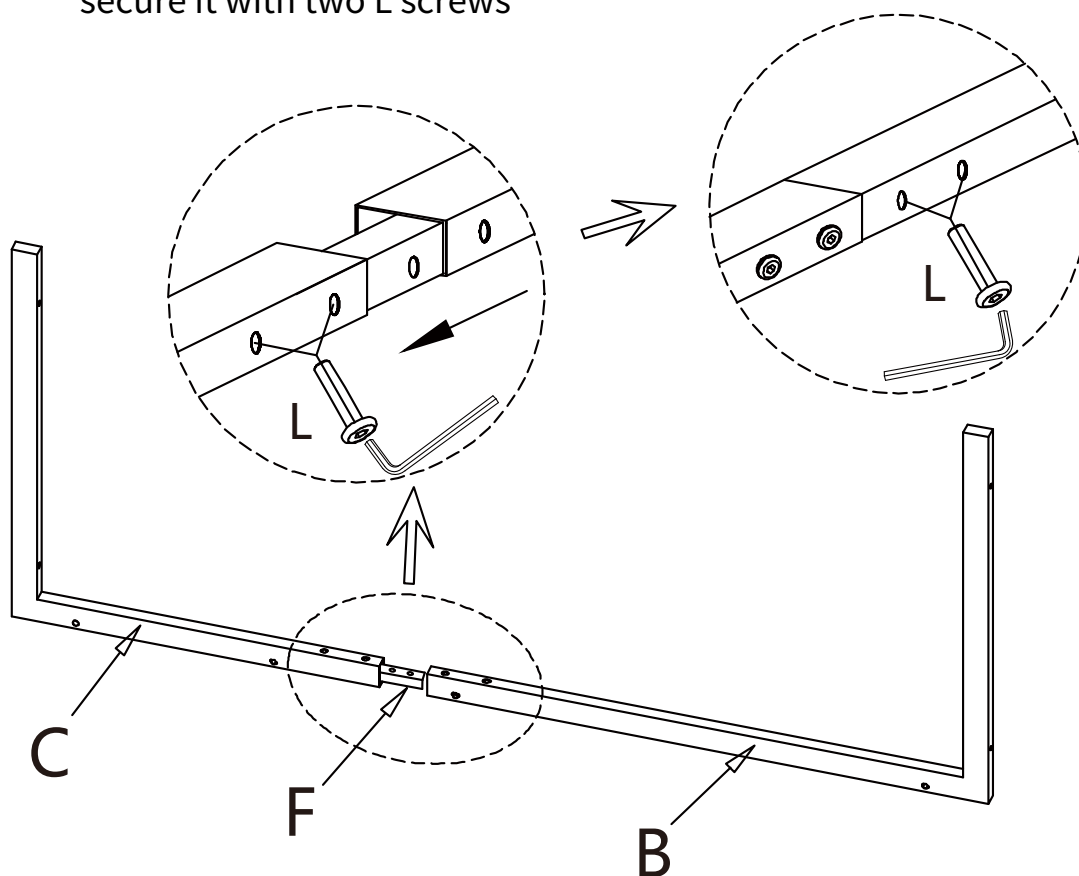


Step 4 Attach the connected B and C parts to the tabletop using screw J.

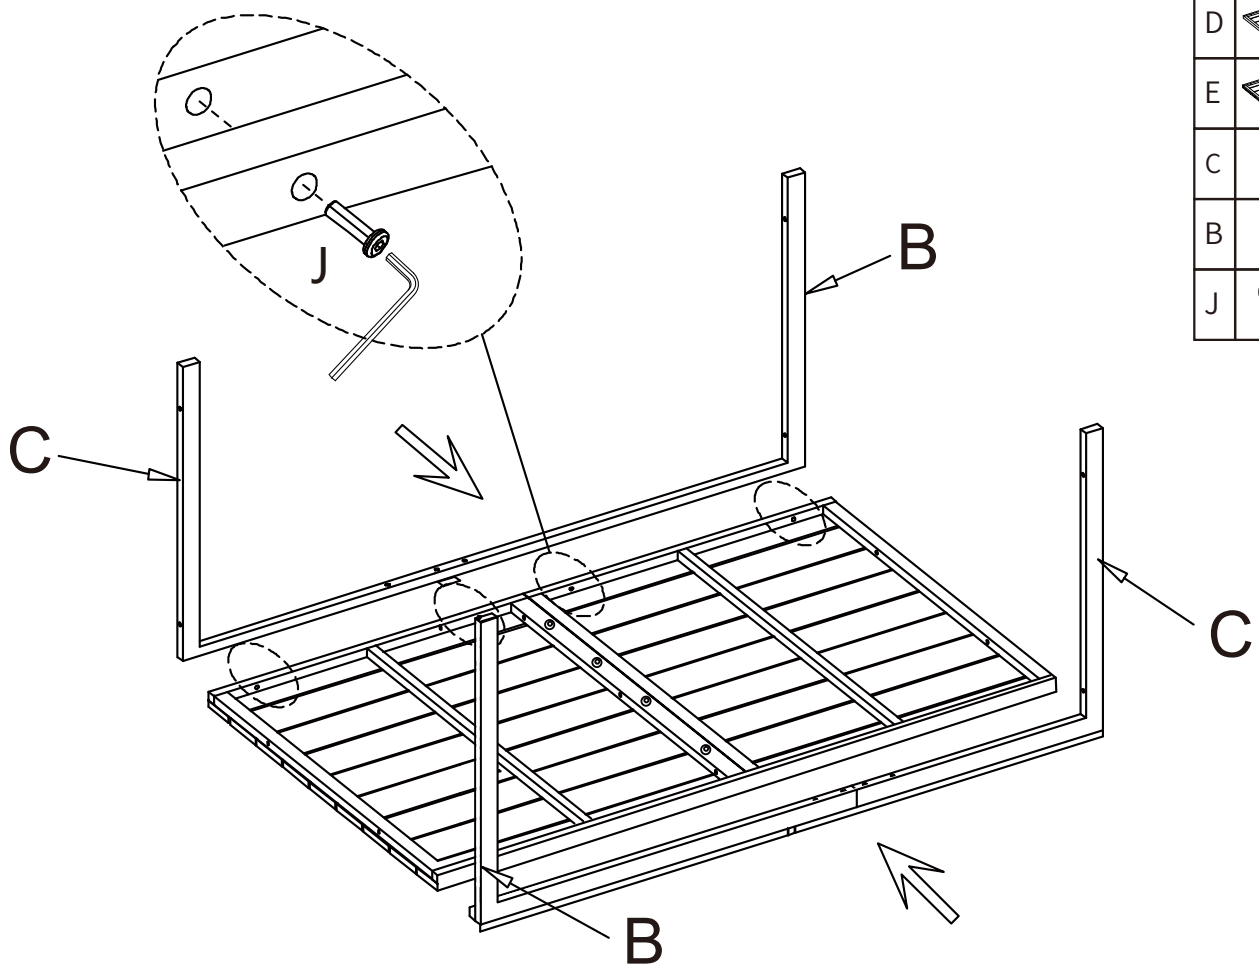

D		1
E		1
C		2
B		2
J		8
M6 * 35		


Step 5 Use screws J and H to connect part 2 (A) parts with parts B and C. (Secure with screw H from the inside)

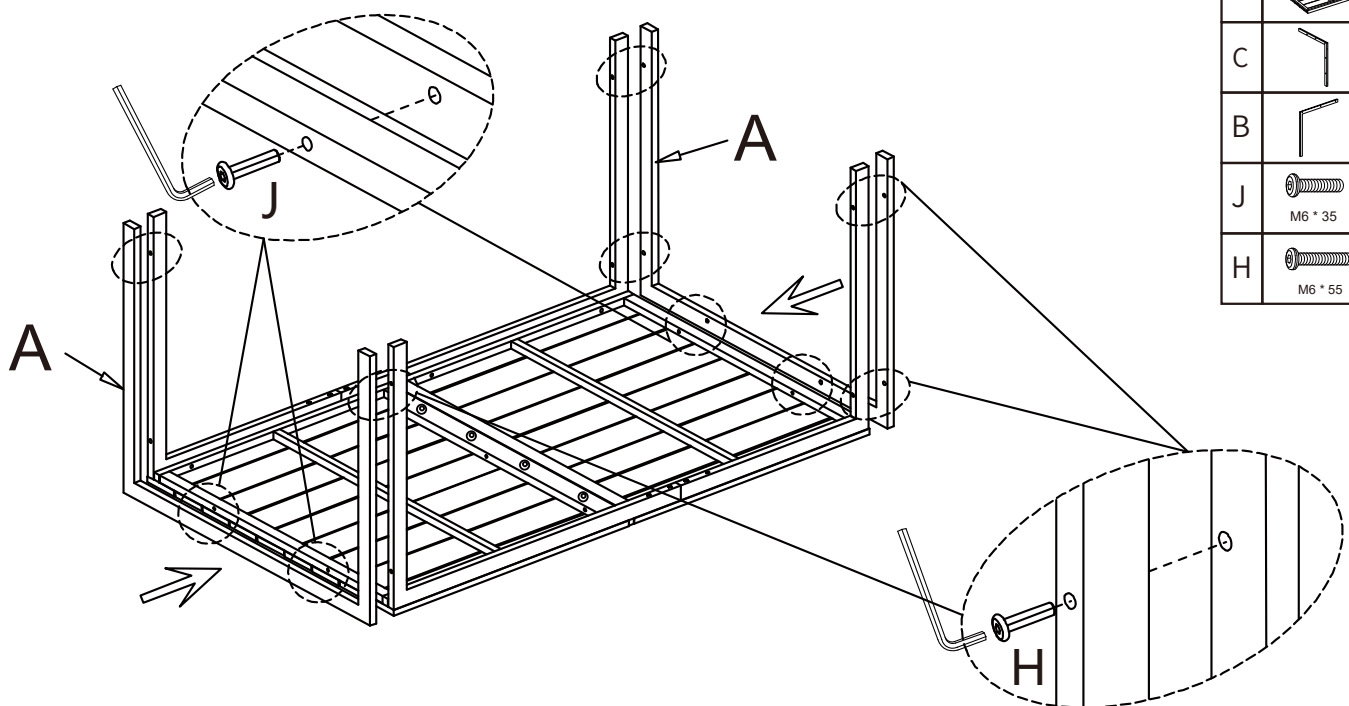

D		1
E		1
C		2
B		2
J		4
M6 * 35		
H		8
M6 * 55		

Secure with screw H from the inside

PATIO BISTRO CHAIR

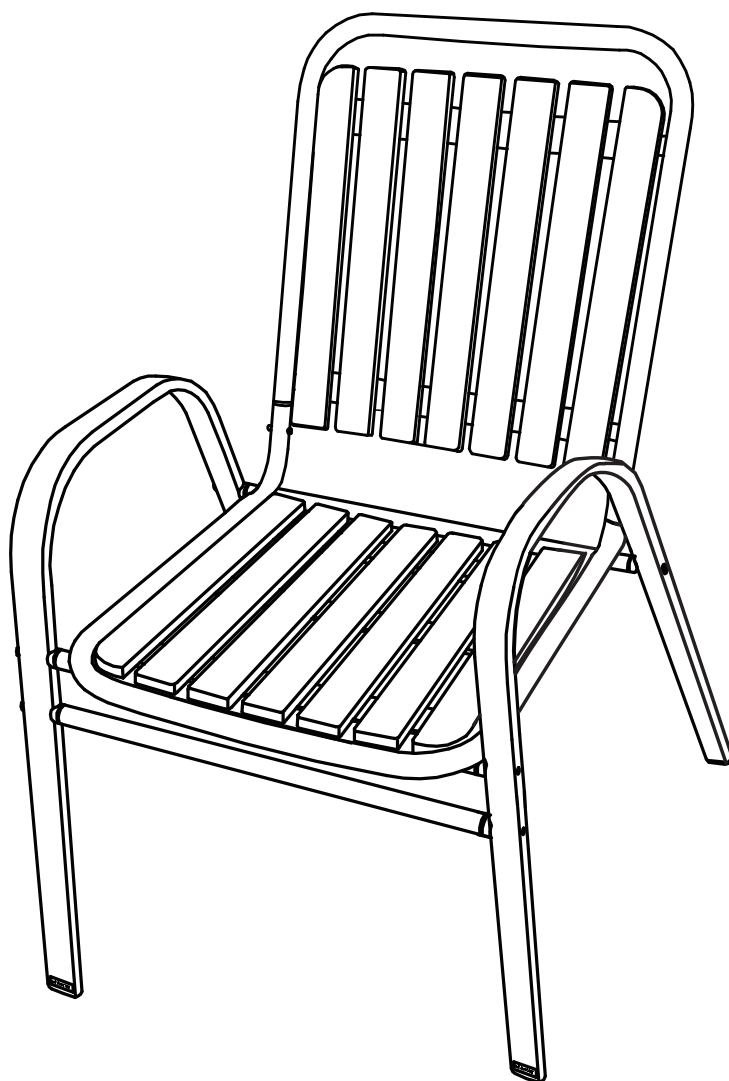

Dear Customer,

Thank you for choosing our product. Please read this manual carefully before assembling or using the product, to avoid damage caused by improper use. If the product is passed on to third parties, this manual has to be passed on along with the product. For any question don't hesitate to contact us.

PARTS LIST

TOOLS REQUIRED




ALLEN WRENCH
(PROVIDED)

ASSEMBLY REQUIREMENT



1 PERSON
ASSEMBLY











UP TO 30 MIN.
ASSEMBLY



265 LBS
CHAIR
CAPACITY

PART LIST

<div data-bbox="86 1267 124 1308">A</div>  <div data-bbox="188 1576 430 1635">1 PC left front leg</div>	<div data-bbox="459 1267 497 1308">B</div>  <div data-bbox="533 1576 794 1635">1 PC right front leg</div>	<div data-bbox="820 1267 858 1308">C</div>  <div data-bbox="928 1576 1023 1619">1 PC</div>	<div data-bbox="1173 1267 1211 1308">D</div>  <div data-bbox="1299 1576 1393 1619">1 PC</div>
<div data-bbox="86 1648 124 1688">E</div>  <div data-bbox="209 1955 303 1998">1 PC</div>	<div data-bbox="459 1648 497 1688">F</div>  <div data-bbox="564 1955 683 1998">6 PCS</div>	<div data-bbox="820 1648 858 1688">G</div>  <div data-bbox="928 1955 1046 1998">6 PCS</div>	<div data-bbox="1173 1648 1211 1688">H</div>  <div data-bbox="1299 1955 1393 1998">1 PC</div>

★ Fasten screws loosely during initial assembly. Do not firmly tighten screws until the step 7.

Assembly Instructions

FRONT




Tips: We have labeled the legs to indicate which side is the front side. However, the factory sometimes mislabeled them, please check with the picture before installing, the straighter side should be the front side.

ATTENTION




- When installing, we suggest you can assemble the product on the flat carton which come with the product, or any other clean floor to avoid the product surface being scratched.
- Please do not dispose of the original product box until you confirm you received the complete and correct item.
- If you want to return the product, you are suggested to contact our after-sale service first. You need to pack the returned product with the original box and then follow the steps to return it.

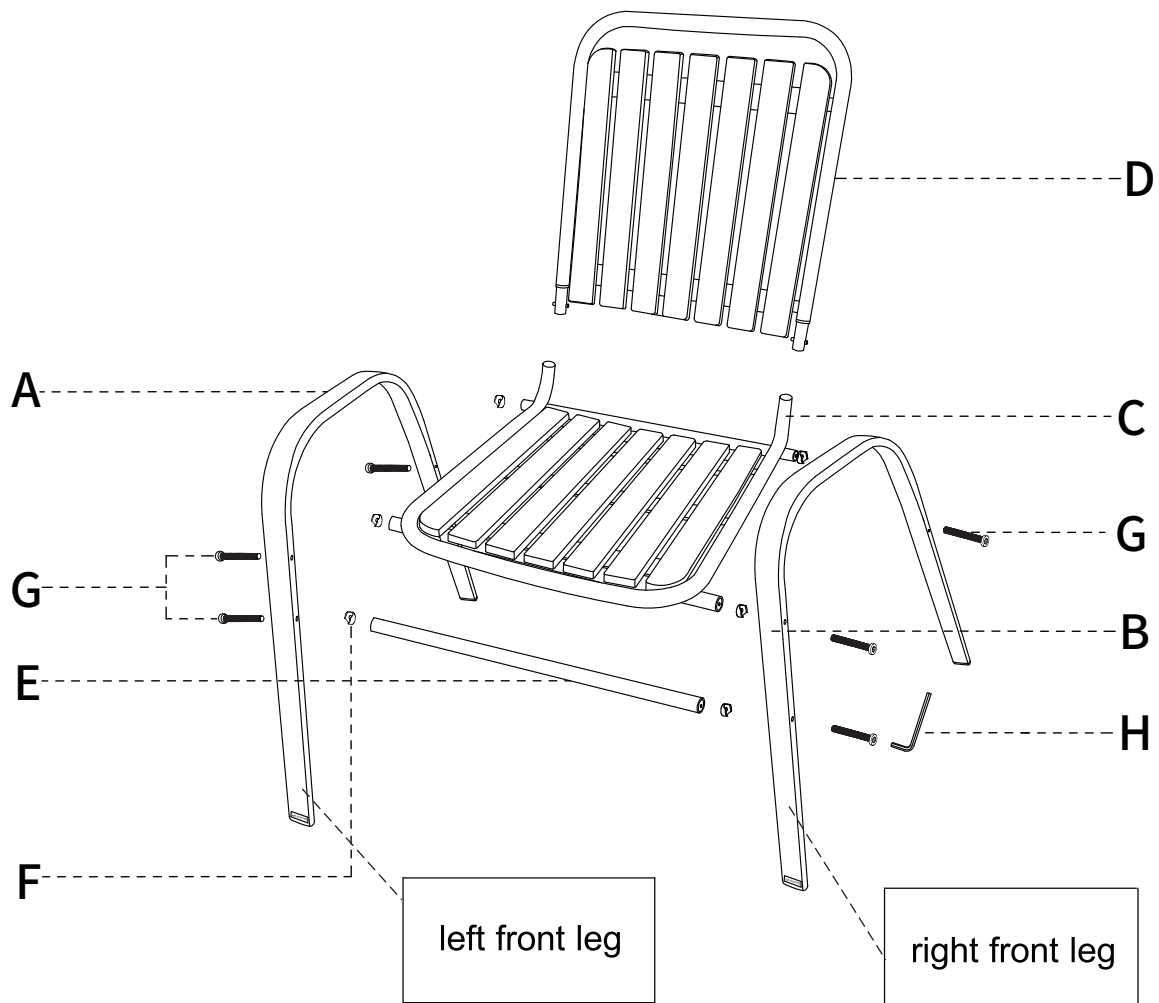

Step 1 Connect the beam (E) and Left Font Leg (A). Use the screw (G) and nut (F) to connect them.

★ Please don't tighten the screws yet.


A		1PC
E		1PC
F		1PC
G		1PC
H		1PC

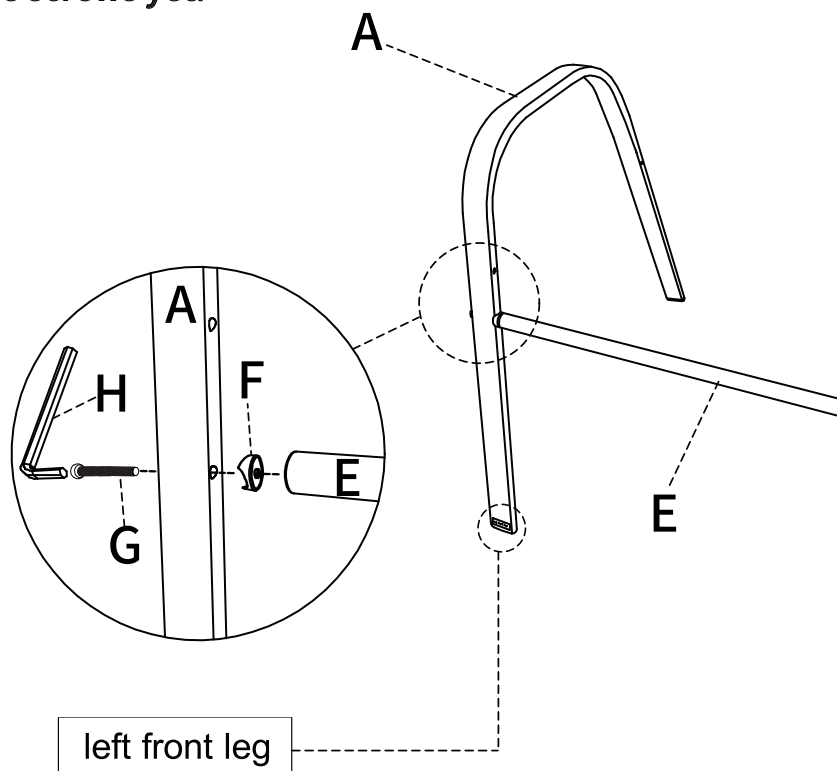

Step 2 Connect the beam (E) and Right Font Leg (B). Use the screw (G) and nut (F) to connect them.


★ Please don't tighten the screws yet.

B		1PC
F		1PC
G		1PC
H		1PC

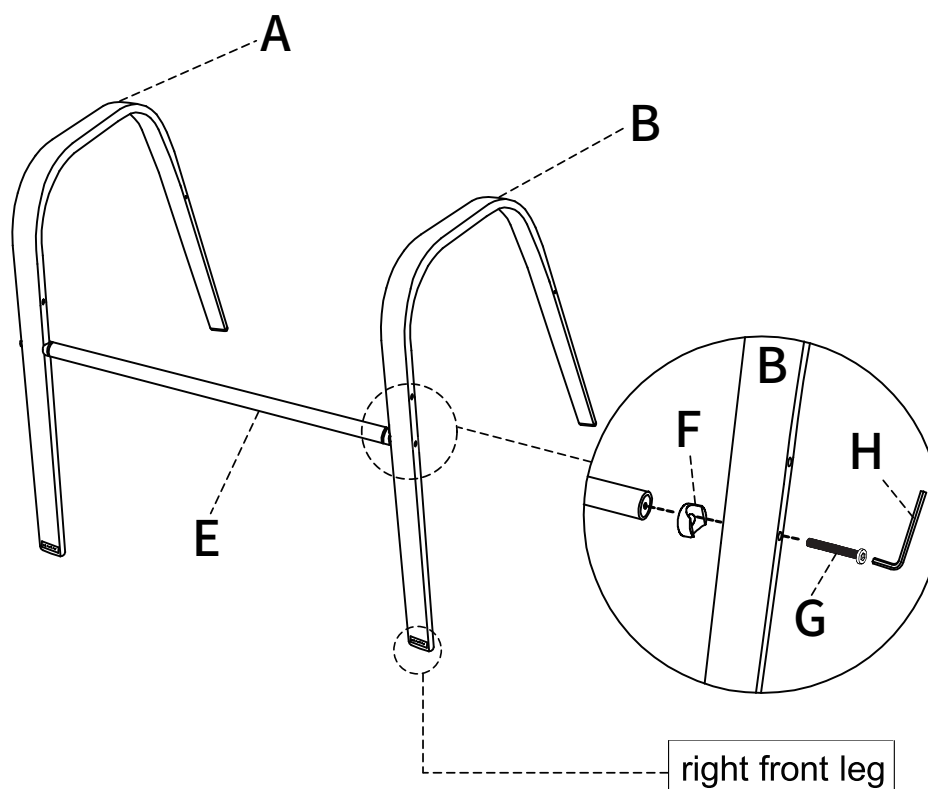




Step 3 Attach the chair seat (C) to the Left Font Leg (A) and the Right Font Leg (B).

★ Please make sure you attach the seat from the correct direction.

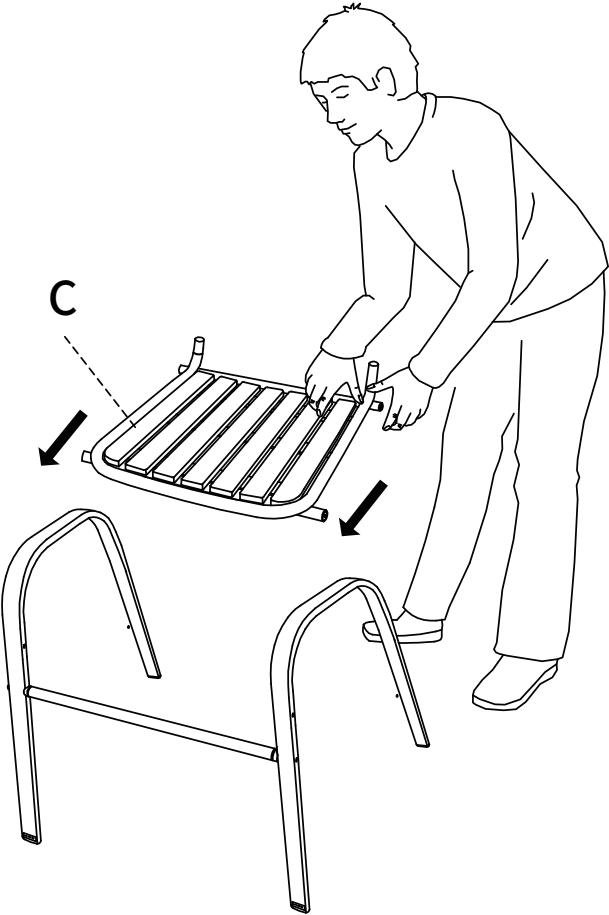



C		1PC
H		1PC

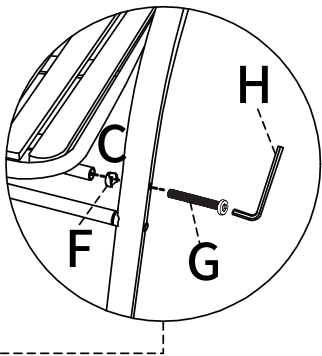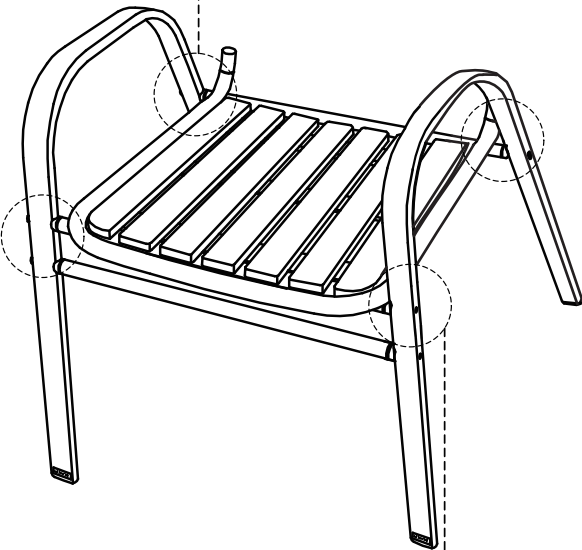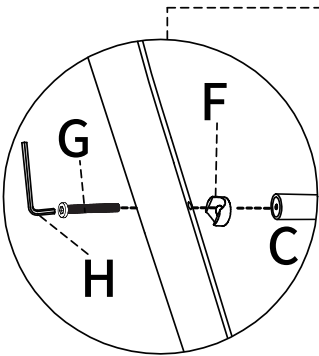
Step 4 Use the 4 screws (G) and 4 nuts (F) to connect them.





F		4PCS
G		4PCS

Step 5 Remove the 2 protect cases on the seat (C).


C		1PC
D		1PC

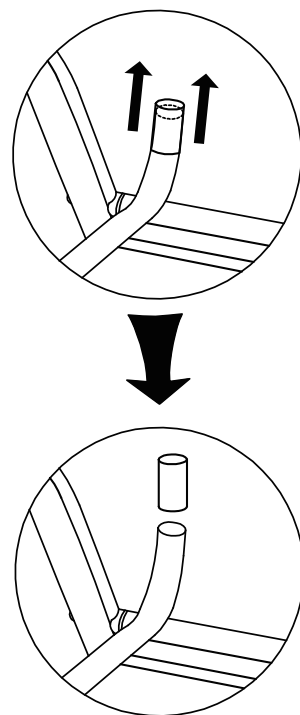

Step 6 Assert the seat back (D) to the seat (C).

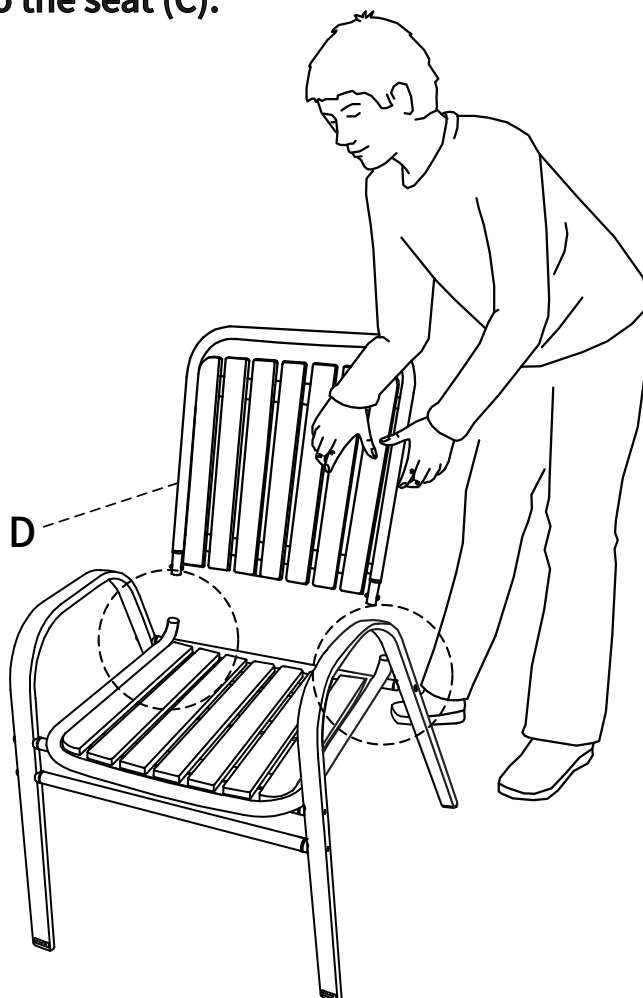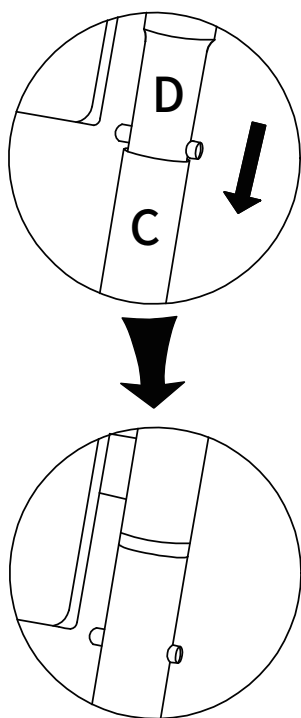


Step 7 Tighten all the screws and nuts.

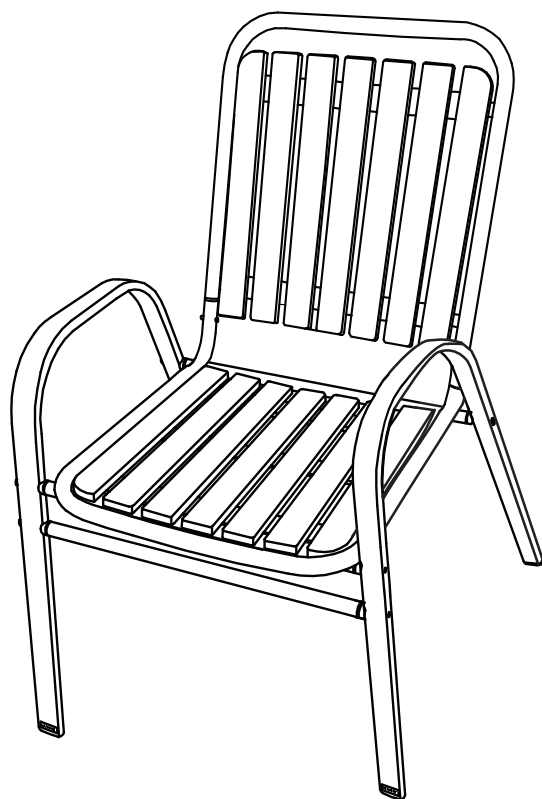


How To Replace The Back And Seat


A Slowly take apart the back from the back frame.

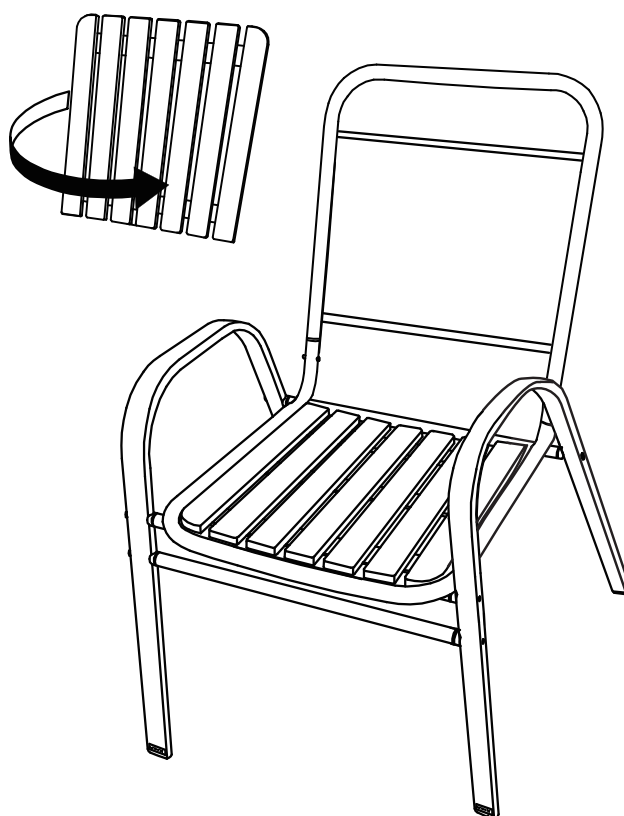


B Slowly take apart the seat from the seat frame.

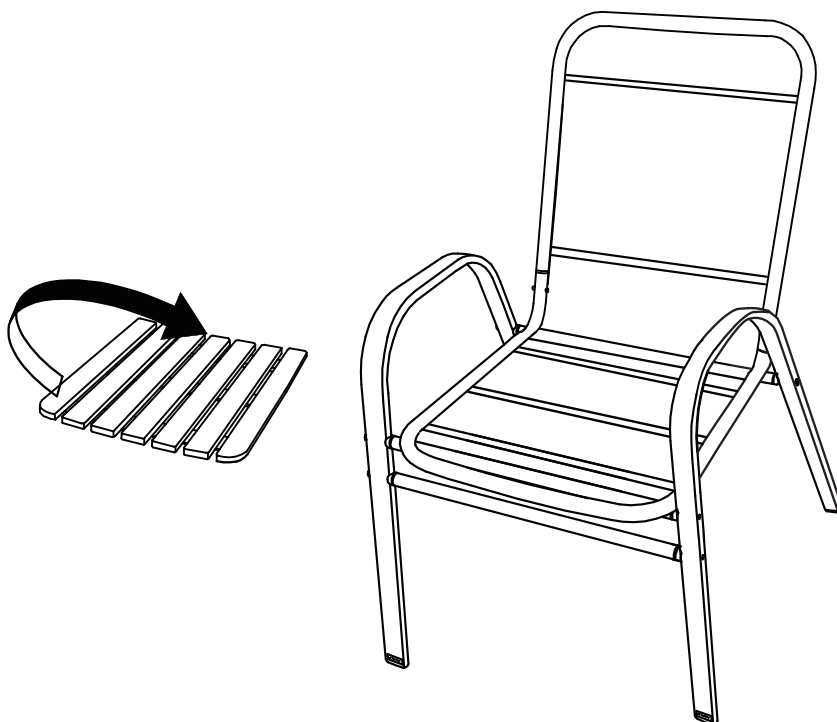

Note ★ When replacing the new seat and back, make sure you assemble them from the correct direction. The edge with round angle should face outside.

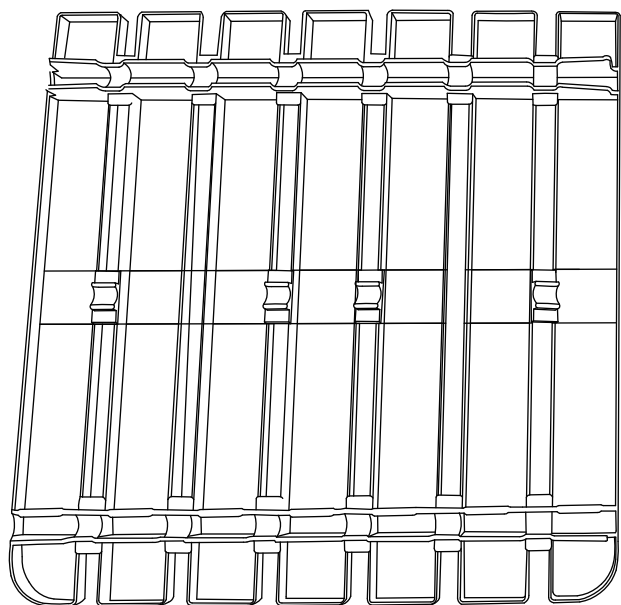

Seat Panel

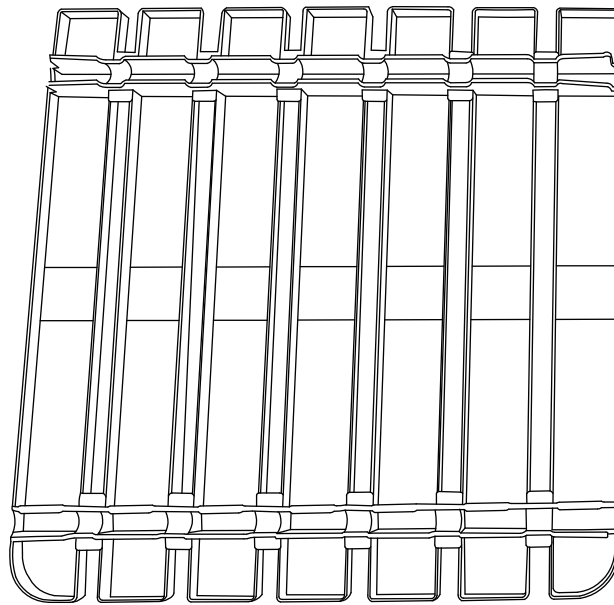

Back Panel