


# COLLECTION SKIN

## COLOR BASILISK TEXTURE

ITEM NUMBER **SKIBA12X24T**  
APPLICATION **FLOOR, WALL**

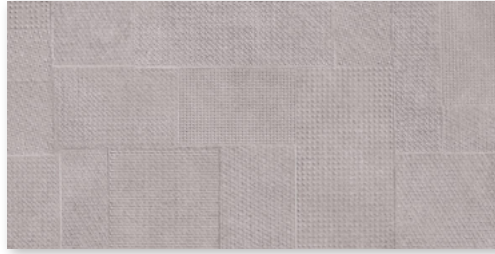

### PRODUCT INFO

NOMINAL SIZE	12" X 24"
ACTUAL SIZE	11.81" X 23.63"
MATERIAL	COLORBODY PORCELAIN
FINISH	MATTE W/3D TEXTURE
THICKNESS	9.5 MM
RECTIFIED	YES
FACES	10
VARIATION	V3
COUNTRY OF ORIGIN	ITALY

### TESTING

DCOF WET	≥ .50
MODULUS OF RUPTURE	≥ 45 N / MM <sup>2</sup>
UNI EN ISO 10545/4	
BREAKING STRENGTH	≥ 2000 N
UNI EN ISO 10545/4	
BREAKING STRENGTH	400 LBS
ASTM C648	
CHEMICAL RESISTANCE	A - LA - HA
UNI EN ISO 10545/13	
CHEMICAL RESISTANCE	UNAFFECTED
ASTM C650	
STAIN RESISTANCE	CLASS 5
UNI EN ISO 10545/14	
WATER ABSORPTION	COMPLIANT
UNI EN ISO 10545/3	
WATER ABSORPTION	COMPLIANT
ASTM C373	
VOC	GREENGUARD GOLD
RECYCLED CONTENT	12%
FROST RESISTANT	YES
HEAT RESISTANT	YES
DIRECT SUNLIGHT	YES

### INSTALLATION

RECOMMENDED GROUT JOINT	3/16"
SEALING REQUIRED	NO
SEALING RECOMMENDED	YES
RECOMMENDED PATTERNS	STACK, BOND, 1/3 OFFSET

### PACKAGING

SOLD BY	BOX
PIECES/BOX	6
SQFT/BOX	11.63 SF
SQFT/PIECE	1.94 SF
WEIGHT/BOX	69.82 LBS

### USAGE

COMMERCIAL FLOORS	YES
RESIDENTIAL FLOORS	YES
RAMPS & INCLINES	NO
SHOWER WALL	YES
SHOWER FLOOR	YES
STEAM/SAUNA WALL	YES
STEAM/SAUNA FLOOR	NO
FIREPLACE	YES

### POOL USAGE

POOL DECK	YES
POOL WATERLINE	YES
POOL SUBMERGED	YES
SPA/HOT TUB	YES (WALL ONLY)

### EXTERIOR USAGE

	FREEZING	NON-FREEZING
EXTERIOR COVERED WALL	YES	YES
EXTERIOR UNCOVERED WALL	YES	YES
EXTERIOR COVERED FLOOR	YES	YES
EXTERIOR UNCOVERED FLOOR	YES	YES

### ADDITIONAL INFORMATION

PLEASE VISIT [GLAZZIOSURFACES.COM](http://GLAZZIOSURFACES.COM) FOR ADDITIONAL PRODUCT INFORMATION INCLUDING INSTALLATION INSTRUCTIONS AND CARE & MAINTENANCE GUIDELINES. ACTUAL COLOR, SIZE, AND TEXTURE MAY VARY. PLEASE REFER TO SAMPLE CHIP FOR VISUAL ACCURACY.

glazzio  
**SURFACES**