


COLLECTION SKIN

COLOR KOMODO TEXTURE

ITEM NUMBER **SKIKO12X24T**
APPLICATION **FLOOR, WALL**

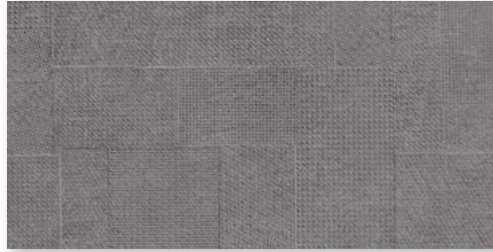

PRODUCT INFO

NOMINAL SIZE	12" X 24"
ACTUAL SIZE	11.81" X 23.63"
MATERIAL	COLORBODY PORCELAIN
FINISH	MATTE W/3D TEXTURE
THICKNESS	9.5 MM
RECTIFIED	YES
FACES	10
VARIATION	V3
COUNTRY OF ORIGIN	ITALY

TESTING

DCOF WET	≥ .50
MODULUS OF RUPTURE	≥ 45 N / MM ²
UNI EN ISO 10545/4	
BREAKING STRENGTH	≥ 2000 N
UNI EN ISO 10545/4	
BREAKING STRENGTH	400 LBS
ASTM C648	
CHEMICAL RESISTANCE	A - LA - HA
UNI EN ISO 10545/13	
CHEMICAL RESISTANCE	UNAFFECTED
ASTM C650	
STAIN RESISTANCE	CLASS 5
UNI EN ISO 10545/14	
WATER ABSORPTION	COMPLIANT
UNI EN ISO 10545/3	
WATER ABSORPTION	COMPLIANT
ASTM C373	
VOC	GREENGUARD GOLD
RECYCLED CONTENT	12%
FROST RESISTANT	YES
HEAT RESISTANT	YES
DIRECT SUNLIGHT	YES

INSTALLATION

RECOMMENDED GROUT JOINT	3/16"
SEALING REQUIRED	NO
SEALING RECOMMENDED	YES
RECOMMENDED PATTERNS	STACK, BOND, 1/3 OFFSET

PACKAGING

SOLD BY	BOX
PIECES/BOX	6
SQFT/BOX	11.63 SF
SQFT/PIECE	1.94 SF
WEIGHT/BOX	69.82 LBS

USAGE

COMMERCIAL FLOORS	YES
RESIDENTIAL FLOORS	YES
RAMPS & INCLINES	NO
SHOWER WALL	YES
SHOWER FLOOR	YES
STEAM/SAUNA WALL	YES
STEAM/SAUNA FLOOR	NO
FIREPLACE	YES

POOL USAGE

POOL DECK	YES
POOL WATERLINE	YES
POOL SUBMERGED	YES
SPA/HOT TUB	YES (WALL ONLY)

EXTERIOR USAGE

	FREEZING	NON-FREEZING
EXTERIOR COVERED WALL	YES	YES
EXTERIOR UNCOVERED WALL	YES	YES
EXTERIOR COVERED FLOOR	YES	YES
EXTERIOR UNCOVERED FLOOR	YES	YES

ADDITIONAL INFORMATION

PLEASE VISIT GLAZZIOSURFACES.COM FOR ADDITIONAL PRODUCT INFORMATION INCLUDING INSTALLATION INSTRUCTIONS AND CARE & MAINTENANCE GUIDELINES. ACTUAL COLOR, SIZE, AND TEXTURE MAY VARY. PLEASE REFER TO SAMPLE CHIP FOR VISUAL ACCURACY.

glazzio
SURFACES