

COLLECTION SMOOTH OPERATOR

COLOR OSCURO MATTE

ITEM NUMBER **SMOOS48X110M**

APPLICATION **FLOOR, WALL**

PRODUCT INFO

NOMINAL SIZE	48" X 110"
ACTUAL SIZE	47.25" X 109.44"
MATERIAL	PORCELAIN SLAB
FINISH	NATURAL
THICKNESS	6.5 MM
RECTIFIED	YES
FACES	6
VARIATION	V3
COUNTRY OF ORIGIN	ITALY (STOCKED IN U.S.)

CERTIFICATION

TESTING

DCOF WET	≥ 0.42
BREAKING STRENGTH	> 2000 N
UNI EN ISO 10545/4	≥ 45 N/MM ²
CHEMICAL RESISTANCE	A - LA - HA UNAFFECTED
UNI EN ISO 10545/13	
STAIN RESISTANCE	CLASS 5
UNI EN ISO 10545/14	
WATER ABSORPTION	COMPLIANT
ASTM C373	
ABRASION	2
ASTM C1027	
VOC	NONE
RECYCLED CONTENT	NO
FROST RESISTANT	YES
HEAT RESISTANT	NO
DIRECT SUNLIGHT	YES


INSTALLATION

RECOMMENDED GROUT JOINT	3/16"
SEALING REQUIRED	NO
SEALING RECOMMENDED	YES
RECOMMENDED PATTERNS	STACKED; BOND; NO MORE THAN 30% OFFSET FOR STAGGERED PATTERN

PACKAGING

SOLD BY	SLAB
DELIVERY	A-FRAME
A-FRAME CAPACITY	13-14 SLABS

2361 NOSTRAND AVE #301
BROOKLYN, NY 11210
INFO@GLAZZIOSURFACES.COM
(718) 663-4747

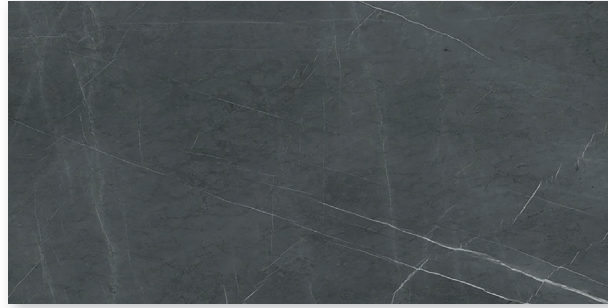

USAGE

COMMERCIAL FLOORS	YES
RESIDENTIAL FLOORS	YES
RAMPS & INCLINES	NO
SHOWER WALL	YES
SHOWER FLOOR	NO
STEAM/SAUNA WALL	YES
STEAM/SAUNA FLOOR	NO
FIREPLACE	YES

POOL USAGE

POOL DECK	NO
POOL WATERLINE	YES
POOL SUBMERGED	YES
SPA/HOT TUB	YES

EXTERIOR USAGE

	FREEZING	NON-FREEZING
EXTERIOR COVERED WALL	YES	YES
EXTERIOR UNCOVERED WALL	YES	YES
EXTERIOR COVERED FLOOR	NO	NO
EXTERIOR UNCOVERED FLOOR	NO	NO

ADDITIONAL INFORMATION

PLEASE VISIT GLAZZIOSURFACES.COM FOR ADDITIONAL PRODUCT INFORMATION INCLUDING INSTALLATION INSTRUCTIONS AND CARE & MAINTENANCE GUIDELINES.

ACTUAL COLOR, SIZE, AND TEXTURE MAY VARY. PLEASE REFER TO SAMPLE CHIP FOR VISUAL ACCURACY.

glazzio®
SURFACES