

General Features

- * Heavy Duty Cast Aluminum Basket with Industrial Texture
- * High Flux Y30 Strontium Ferrite Magnet
- * High Impedance Aluminum Former with EISV Voice Coil
- * Poly Cotton Spider with Woven Round Tinsel Leads
- * Non-pressed Paper Cone with Pressed Foam Surround
- * Reinforced Fiberglass Woven Dust Cap for High Power Application
- * 10mm Top Plate


Specifications

T/S PARAMETERS		MGK124	
ELECTRO-ACOUSTIC		Parallel	Series
Fs	Hz	32.2	
Vas	Liters	35.7	
Qts		0.56	
no	%	0.17	
1-W SPL	dB	84.3	
2.83V SPL	dB	90.1	
MECHANICAL		Parallel	Series
Diameter	mm	250	
Sd	sq.m	0.0491	
Xmax	mm	15	
Xmech	mm	35	
Vd	Liters	3.43	
Qms		3.3	
Rms	Kg/s	14.4	
Mms	g	234.4	
Cms	mm/N	0.104	
ELECTRICAL		Parallel	Series
Re	Ohm	1.7	6.8
BL	Tm	11.3	21.8
Le	mH	0.96	0.92
Qes		0.675	
RMS Power	W	750	
MAX Power	W	1500	

MGK

Series

Subwoofers

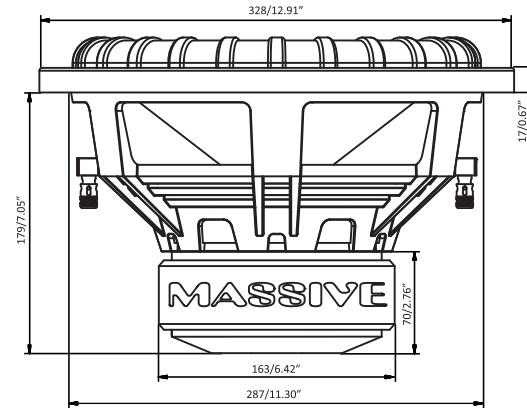

Mounting Depth	179 mm	7.05"
Mounting Diameter	328 mm	12.91"
Mounting cut diameter	287 mm	11.30"
Net weight	8.3 Kg	18.3 Lb
Displacement	0.00246 m ³	0.087 Ft ³

	External	Internal	Volume	Fb	Port round	Port Squar
Sealed	14" x 13" x 14"	1.04 ft ³	0.94 ft ³	46 Hz	N/A	N/A
Ported	14" x 18" x 14"	1.49 ft ³	1.38 ft ³	38 Hz	(2) 4"x10"	10"(L)12.5"x2"

1500
MAX WATTS



P.O. Box 252004 LOS ANGELES, CA 90025 U.S.A.
WWW.MASSIVEAUDIO.COM