

Features

- 77.5oz Ferrite Magnet
- Vented and Extended Core
- 60Hz ~ 4000Hz
- Reinforced Paper Cone
- Cloth Cone Edge With Solid Composition Paper Dust Cap
- 99.2 dB Sensitivity


GENERAL SPECIFICATIONS

Nominal Basket Diameter	10.2 / 260	in/mm
Nominal Impedance	8	Ohm
RMS Watts	350	Watts
Music Program Power	700	Watts
Frequency Range	60~4000	Hz
Sensitivity	99.2	dB
Voice Coil Diameter	3 / 75.5	in/mm
Voice Coil Material	TSV CCAW	
Voice Coil Former	Aluminum	



THIELE-SMALL PARAMETERS

Resonant Frequency	Fs	60	Hz
DC Resistance	Re	5.6	Ohms
Mechanical Q	Qms	6.6	Qms
Electromagnetic Q	Qes	0.25	Qes
Total Q	Qts	0.24	Qts
Mechanical Suspension	Cms	292.4	uM/N
BL Product	BL	15.8	TM
Diaphragm	Mms	29.1	g
Surface Area of Cone	Sd	0.0346	sqm
Equivalent Volume	Vas	41.01	L
Excursion	Xmax		mm

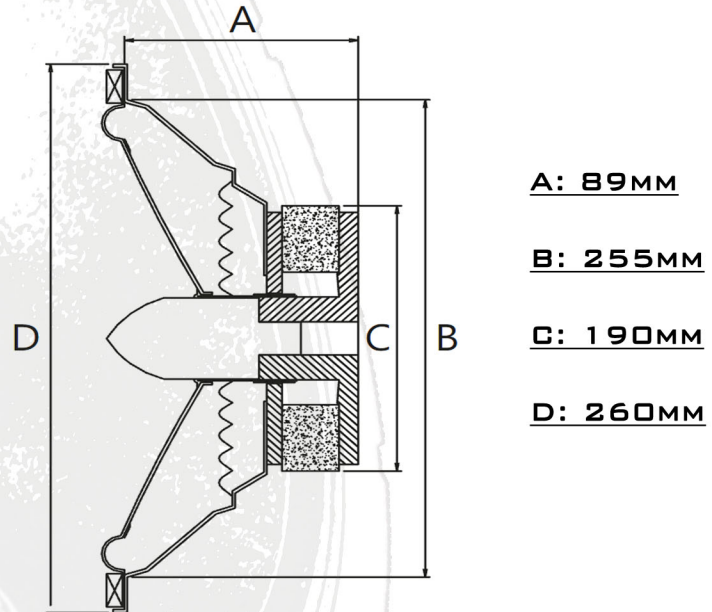

MOUNTING & WEIGHT

Overall Diameter	10.2 / 260	in/mm
Baffle Hole Diameter	8.86 / 225	in/mm
Mounting Hole Diameter	0.27/7	in/mm
Mounting Hole B.C.D	9.6/244	in/mm
Depth	4.13/105	in/mm
Net Weight	15.75	Lbs
Magnet Weight	77.5	oz
Gap Height	0.4/10	in/mm