




# PAT200

## Compression Driver



### KEY FEATURES

- 2.84" Voice Coil
- 200 Watts Continuous Power Handling
- 111 dB Sensitivity
- 500-20 KHz




### GENERAL SPECIFICATIONS

Nominal Impedance	8 ohm
Rated Power Handling	200 Watts
Program Power	500 Watts
Sensitivity 2.83v at 1m	111 dB
Recommended Hi Pass Crossover	500 Hz
Frequency Response at - 10dB	500-20 KHz
Voice Coil Diameter	2.84"(72.2 mm)
Voice Coil Wire	CCAW
Former Material	Kapton
Diaphragm Material	Titanium
Magnet Material	Ferrite

### THIELE-SMALL PARAMETERS

Overall Depth	2.70"(68.7 mm)
Mounting Depth	/
Overall Width	6.69"(170 mm)
Overall Height	6.69"(170 mm)
Coutout Diameter	6.69"(170 mm)
Net Weight	10.8 lbs(4.9 kg)
Shipping Weight	11.2 lbs(5.1 kg)
Carton Dimensions WxLxH	7.6"x7.0"x3.2" (194x179x81 mm)

Frequency Response Measured at 2.83v/1m

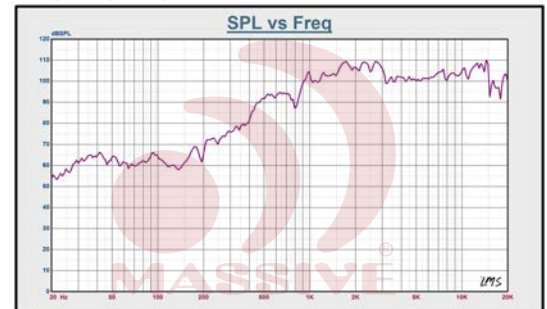

**500**  
PEAK WATTS

