



## CONTENTS

---

### Blow Wall Mount

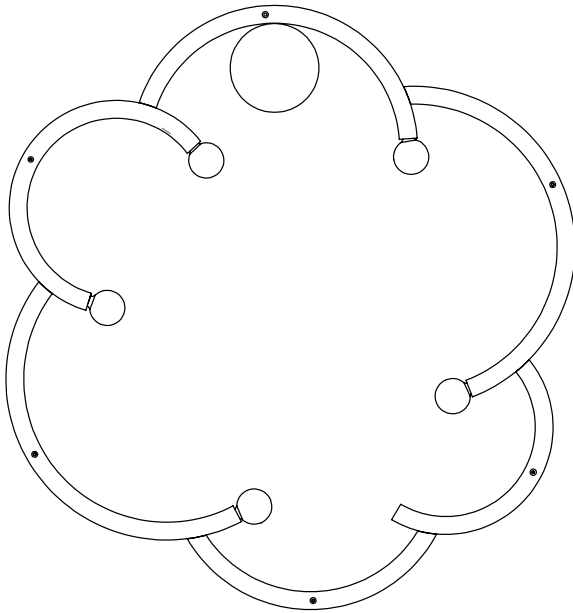

### Crossbar




---

8-32 Screws (2)



---

Bulbs (5)



Incandescent 25-Watt

## SAFETY INFORMATION

---

Only one light bulb per socket.

Only suitable for direct mounting on non-combustible surfaces.

Under no circumstances can Blow Fixtures be mounted on normally flammable surfaces.

Suitable for dry, indoor use only.

Maximum ambient temperatures: 25° C

## BLOW WALL MOUNT INSTALLATION

---

*Note: Please contact a licensed electrician.  
Note: Do not use bulbs that exceed 25 watts.*

1. Attach barrel mount (A) to junction box (B) by screwing provided #8-32 screws from the back of the mount into the junction box. Pull electrical wires out from the junction box into the barrel.
3. Attach fixture by screwing mounting plate (C) onto front of barrel mount.
4. Make electrical connections between fixture and junction box wires and tuck inside barrel mount. Thread on barrel mount cap (D).
5. Once fixture is securely installed, screw in light bulbs.

