



## CONTENTS

---


### Aquafresh

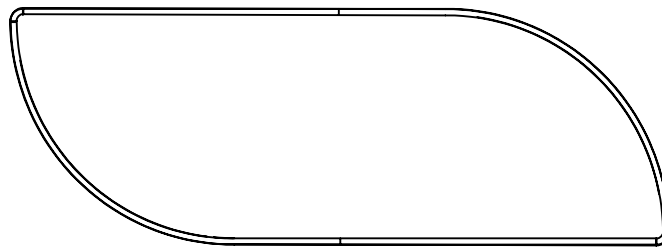


#### Custom Crossbar

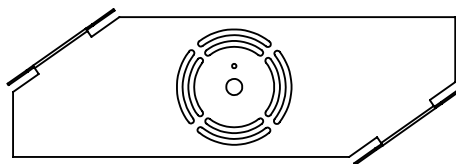


#### 6-32 Socket Cap Screws (4)




#### 8-32 Screws (2)



#### Allen Key



#### Wago Connector (2)



## SAFETY INFORMATION

---

Only suitable for direct mounting on non-combustible surfaces.  
Under no circumstances can Odds & Ends Fixtures be mounted on normally flammable surfaces.  
Suitable for dry, indoor use only.  
Maximum ambient temperatures: 25° C

## WALL INSTALLATION | AQUAFRESH

---

*NOTE: Please contact a licensed electrician.*

1. Detach the custom crossbar (B) from the back of the fixture (A) and secure onto the junction box using provided 8-32 screws. Make sure to pull lead wires out through the center hole.
2. Carefully hold fixture to custom crossbar and make lead wire connections (C), then connect the ground wire (D) to the crossbar. (Optional: connect the 0-10V dimming wires (E) as needed. 0-10V wires may be inside the fixture). Push wire connectors back through center hole of crossbar into junction box.
3. Fit the light fixture back over the crossbar and secure it in place with the four provided socket cap screws (F).

