
Roll & Hill

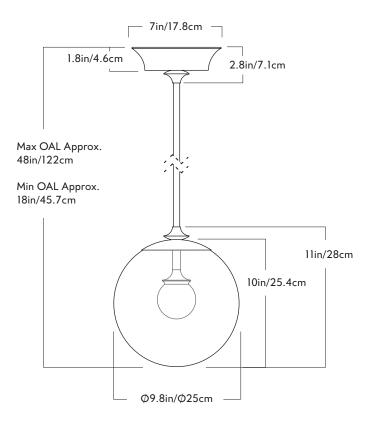

Roll & Hill

Series The Roll & Hill Pendant

Product Pendant 01 - Globe

<u>Dimensions</u> Dia 9.8in/25cm x H 11in/28cm

Weight 7lb/3.2kg

<u>Materials</u> Brass, Glass

Pendant 01 - Globe

<u>Finishes/Colors</u> Oil Rubbed Bronze, Brass

<u>Glass Color/Texture</u> Peach/Pineapple, Fume/Ripple, Opal/Smooth

Suspension 1/2-inch stem in matching metal finish. 35-inch length included with lamp. 72-inch length available for additional cost. Stem length can be adjusted on site.

<u>Canopy</u> 7-inch round in matching metal finish

Ceiling Slope 0° mounting slope. Up to 90° variable hang-straight available upon request.

Driver location Driver located in canopy

Certifications UL, cUL (120V) CE (240V) 120/277V Illumination Integrated LED Wattage: 11W Lumens (Peach): 500 Lumens est. Lumens (Fume): 500 Lumens est. Lumens (Opal): 450 Lumens est. Color Temperature: 2700K, 90+ CRI LED Lifetime: 50,000 Hours est. Dimming: 120V - TRIAC, ELV, 0-10V 277V - 0-10V only

240V Illumination

Integrated LED Wattage: 11W Lumens (Peach): 500 Lumens est. Lumens (Fume): 500 Lumens est. Lumens (Opal): 450 Lumens est. Color Temperature: 2700K, 90+ CRI LED Lifetime: 50,000 Hours est. Dimming: TRIAC, ELV or 0-10V

Fixture Mounting Designed to be mounted on standard 4in. Electrical Box. Two #8-32 screws included. Additional mounting hardware provided for 240V versions.

Roll & Hill

7in/17.8cm 1.8in/4.6cm 2.8in/7.1cm Max OAL Approx. 50in/127cm Min OAL Approx. 20in/51cm 13in/33cm 12in/30.5cm

Roll & Hill

Series The Roll & Hill Pendant

Product Pendant 01 - Tulip

Dimensions Dia 9.2in/23.5cm x H 13in/33cm

Weight 8lb/3.6kg

<u>Materials</u> Brass, Glass

Pendant 01 - Tulip

<u>Finishes/Colors</u> Oil Rubbed Bronze, Brass

<u>Glass Color/Texture</u> Peach/Pineapple, Fume/Ripple, Opal/Smooth

Suspension 1/2-inch stem in matching metal finish. 35-inch length included with lamp. 72-inch length available for additional cost. Stem length can be adjusted on site.

<u>Canopy</u> 7-inch round in matching metal finish

Ceiling Slope 0° mounting slope. Up to 90° variable hang-straight available upon request.

Driver location Driver located in canopy

Certifications UL, cUL (120V) CE (240V) 120/277V Illumination Integrated LED Wattage: 11W Lumens (Peach): 500 Lumens est. Lumens (Fume): 500 Lumens est. Lumens (Opal): 450 Lumens est. Color Temperature: 2700K, 90+ CRI LED Lifetime: 50,000 Hours est. Dimming: 120V - TRIAC, ELV, 0-10V 277V - 0-10V only

240V Illumination

Integrated LED Wattage: 11W Lumens (Peach): 500 Lumens est. Lumens (Fume): 500 Lumens est. Lumens (Opal): 450 Lumens est. Color Temperature: 2700K, 90+ CRI LED Lifetime: 50,000 Hours est. Dimming: TRIAC, ELV or 0-10V

Fixture Mounting Designed to be mounted on standard 4in. Electrical Box. Two #8-32 screws included. Additional mounting hardware provided for 240V versions.