
Roll & Hill

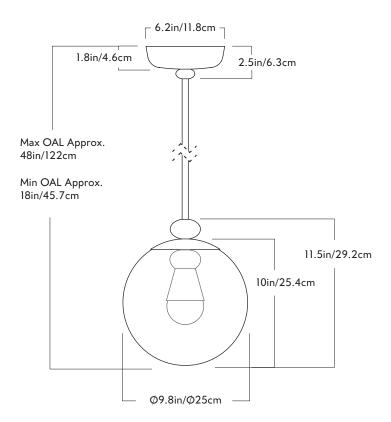

Roll & Hill

Series

The Roll & Hill Pendant

Product

Pendant 03 - Globe

Dimensions

Dia 9.8in/25cm x H 11.5in/29.2cm

Weight

11.2lb/5kg

<u>Materials</u>

Brass, Glass

Pendant 03 - Globe

Finishes/Colors

Oil Rubbed Bronze, Brass

Glass Color/Texture

Peach/Pineapple, Fume/Ripple,

Opal/Smooth

<u>Suspension</u>

1/2-inch stem in matching metal finish.35-inch length included with lamp.72-inch length available for additional cost. Stem length can be adjusted on site.

Canopy

6-inch round in matching metal finish

Ceiling Slope

0° mounting slope.

Up to 90° variable hang-straight available upon request.

Driver location

Driver located in canopy

Certifications UL, cUL (120V) CE (240V)

120/277V Illumination

Integrated LED

Wattage: 11W

Lumens (Peach): 500 Lumens est. Lumens (Fume): 500 Lumens est. Lumens (Opal): 450 Lumens est. Color Temperature: 2700K, 90+ CRI LED Lifetime: 50,000 Hours est.

Dimming: 120V - TRIAC, ELV, 0-10V 277V - 0-10V only

240V Illumination

Integrated LED Wattage: 11W

Lumens (Peach): 500 Lumens est. Lumens (Fume): 500 Lumens est. Lumens (Opal): 450 Lumens est. Color Temperature: 2700K, 90+ CRI LED Lifetime: 50,000 Hours est. Dimming: TRIAC, ELV or 0-10V

Fixture Mounting

Designed to be mounted on standard


4in. Electrical Box.

Two #8-32 screws included.

Additional mounting hardware provided

for 240V versions.

Roll & Hill

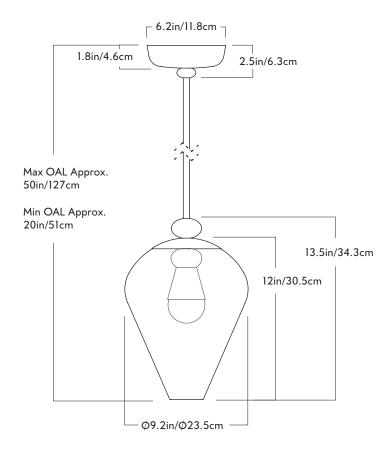

Roll & Hill

Pendant 03 - Tulip

Series

The Roll & Hill Pendant

Product

Pendant 03 - Tulip

Dimensions

Dia $9.2in/23.5cm \times H 13.5in/34.3cm$

Weight

12.2lb/5.5kg

<u>Materials</u>

Brass, Glass

Finishes/Colors

Oil Rubbed Bronze, Brass

Glass Color/Texture

Peach/Pineapple, Fume/Ripple,

Opal/Smooth

<u>Suspension</u>

1/2-inch stem in matching metal finish.35-inch length included with lamp.72-inch length available for additional cost. Stem length can be adjusted on site.

Canopy

6-inch round in matching metal finish

Ceiling Slope

0° mounting slope.

Up to 90° variable hang-straight available upon request.

Driver location

Driver located in canopy

Certifications UL, cUL (120V)

CE (240V)

120/277V Illumination

Integrated LED Wattage: 11W

Lumens (Peach): 500 Lumens est. Lumens (Fume): 500 Lumens est.

Lumens (Opal): 450 Lumens est. Color Temperature: 2700K, 90+ CRI LED Lifetime: 50,000 Hours est. Dimming: 120V - TRIAC, ELV, 0-10V

277V - 0-10V only

240V Illumination

Integrated LED Wattage: 11W

Lumens (Peach): 500 Lumens est. Lumens (Fume): 500 Lumens est. Lumens (Opal): 450 Lumens est. Color Temperature: 2700K, 90+ CRI LED Lifetime: 50,000 Hours est. Dimming: TRIAC, ELV or 0-10V

Fixture Mounting

Designed to be mounted on standard

4in. Electrical Box.

Two #8-32 screws included.

Additional mounting hardware provided

for 240V versions.