

## Pole

## 05 - Surface to Surface - 3 Sections - 120V

### Series Pole

Product  
05 - Surface to Surface - 3 Sections -  
120V

### Dimensions

	A	B
Min.	85in / 216cm	87in / 221cm
Preferred	87in / 221cm	85in / 216cm
Max.	89in / 226cm	83in / 211cm

Weight  
5lb/2.3kg

### Materials

Aluminum, stainless steel, silicone

### Metal Finishes

Black

### Large Mount - Powered

L 5.1in/13cm x W 5.1in/13cm x  
H 0.4in/1cm cylindrical plate in matching  
metal finish

### Small Mount - Non powered

L 1.8in/4.5cm x W 1.8in/4.5cm x  
H 0.3in/.7cm cylindrical plate in  
matching metal finish

### Certifications

UL, cUL (120V)

### 120V Illumination


Integrated LED  
Wattage: 8 Watts  
Lumens: 300 Lumens est.  
Color Temperature: 2700K  
CRI: 90+  
LED Lifetime: 70,000 Hours est.  
Dimming: Triac, ELV or 0-10V

### Driver location

Driver located in the J-Box

### Fixture Mounting

Designed to be mounted on standard  
4in. Electrical Box.  
Two #8-32 screws included.

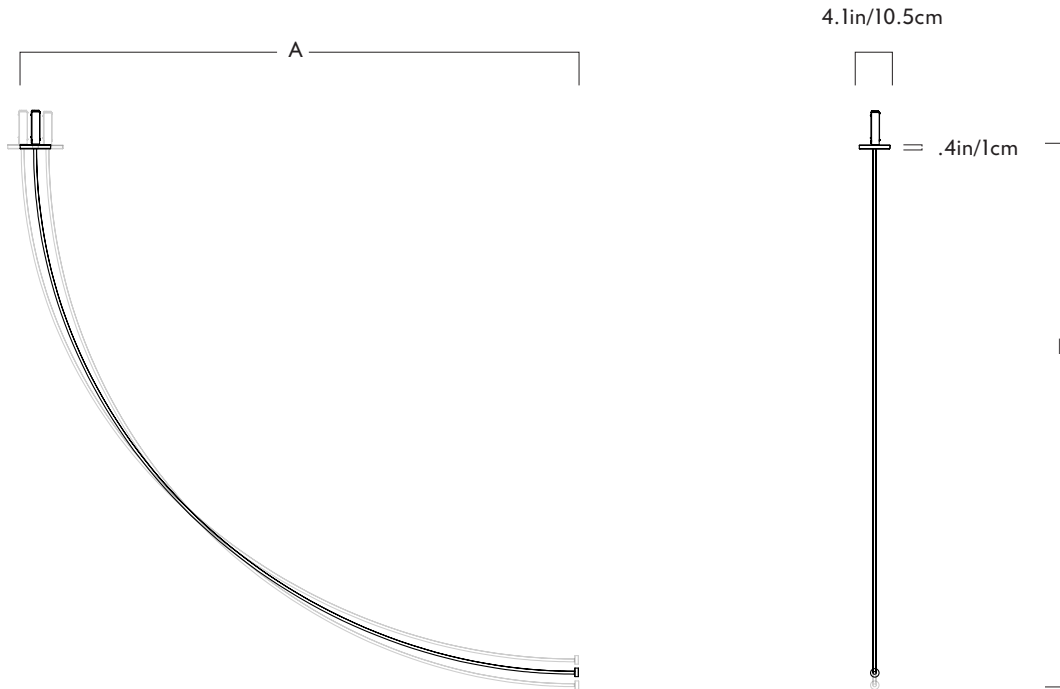

## Pole

## 05 - Surface to Surface - 3 Sections - 240V

### Series

Pole

**Product**  
05 - Surface to Surface - 4 Sections - 240V

### Dimensions

	A	B
Min.	85in / 216cm	87in / 221cm
Preferred	87in / 221cm	85in / 216cm
Max.	89in / 226cm	83in / 211cm

**Weight**  
6.9lb/3.1kg

### Materials

Aluminum, stainless steel, silicone

### Metal Finishes

Black

### Large Mount - Powered

L 4.1in/10.5cm x W 4.1in/10.5cm x  
H 0.4in/1cm cylindrical plate in matching metal finish.

### Small Mount - Non powered

L 1.8in/4.5cm x W 1.8in/4.5cm x  
H 0.3in/.7cm cylindrical plate in matching metal finish

### Driver Box (240V Only)

240V version includes box to house drivers. Dimensions are L 1.2in/3cm x W 2.9in/7.5cm x H 4.5in/11.5cm

### Certification

CE (240V)

### 240V Illumination


Integrated LED  
Wattage: 8 Watts  
Lumens: 300 Lumens est.  
Color Temperature: 2700K  
CRI: 90+  
LED Lifetime: 70,000 Hours est.  
Dimming: ELV or 0-10V

### Driver location

Driver located in the Driver Box.

### Fixture Mounting

Designed to be mounted on standard 4in. Electrical Box.  
Two #8-32 screws included.  
Additional mounting hardware provided for 240V versions.

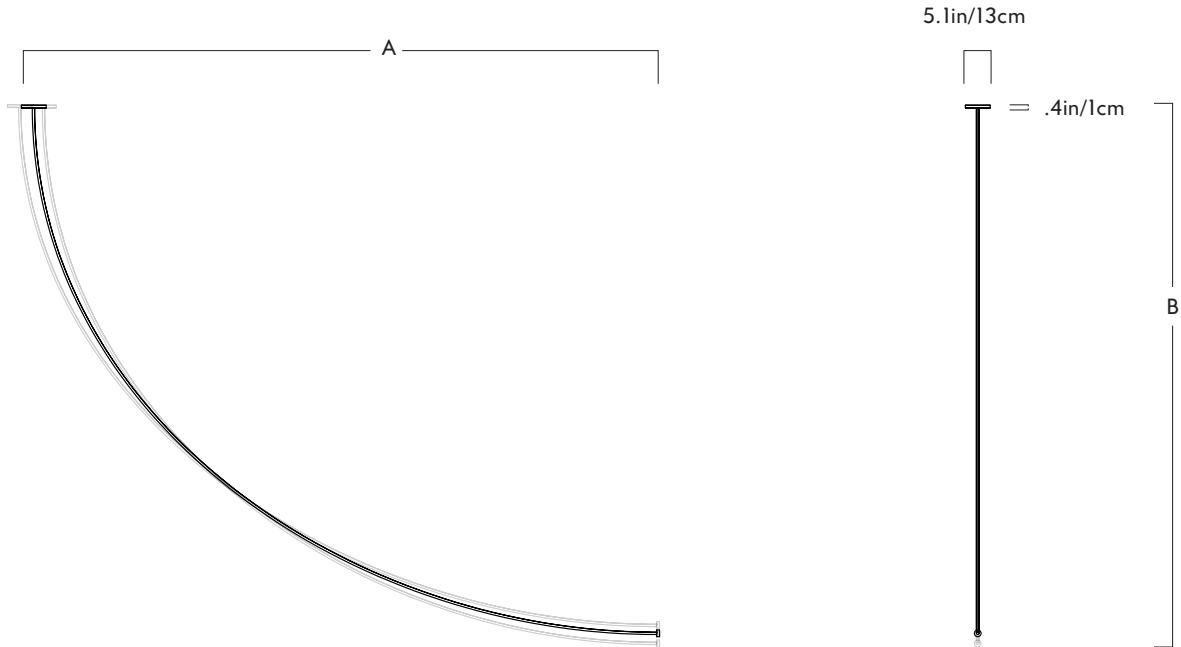

## Pole

## 05 - Surface to Surface - 4 Sections - 120V

### Series Pole

Product  
05 - Surface to Surface - 4 Sections -  
120V

<u>Dimensions</u>	A	B
Min.	122in / 310cm	107in / 272cm
Preferred	124in / 315cm	105in / 267cm
Max.	126in / 320cm	103in / 262cm

Weight  
5lb/2.3kg

Materials  
Aluminum, stainless steel, silicone

Metal Finishes  
Black

Large Mount - Powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 0.4in/1cm cylindrical plate in matching  
metal finish


Small Mount - Non powered  
L 1.8in/4.5cm x W 1.8in/4.5cm x  
H 0.3in/.7cm cylindrical plate in  
matching metal finish

Certifications  
UL, cUL (120V)

120V Illumination  
Integrated LED  
Wattage: 10 Watts  
Lumens: 400 Lumens est.  
Color Temperature: 2700K  
CRI: 90+  
LED Lifetime: 70,000 Hours est.  
Dimming: Triac, ELV or 0-10V

Driver location  
Driver located in the J-Box

Fixture Mounting  
Designed to be mounted on standard  
4in. Electrical Box.  
Two #8-32 screws included.

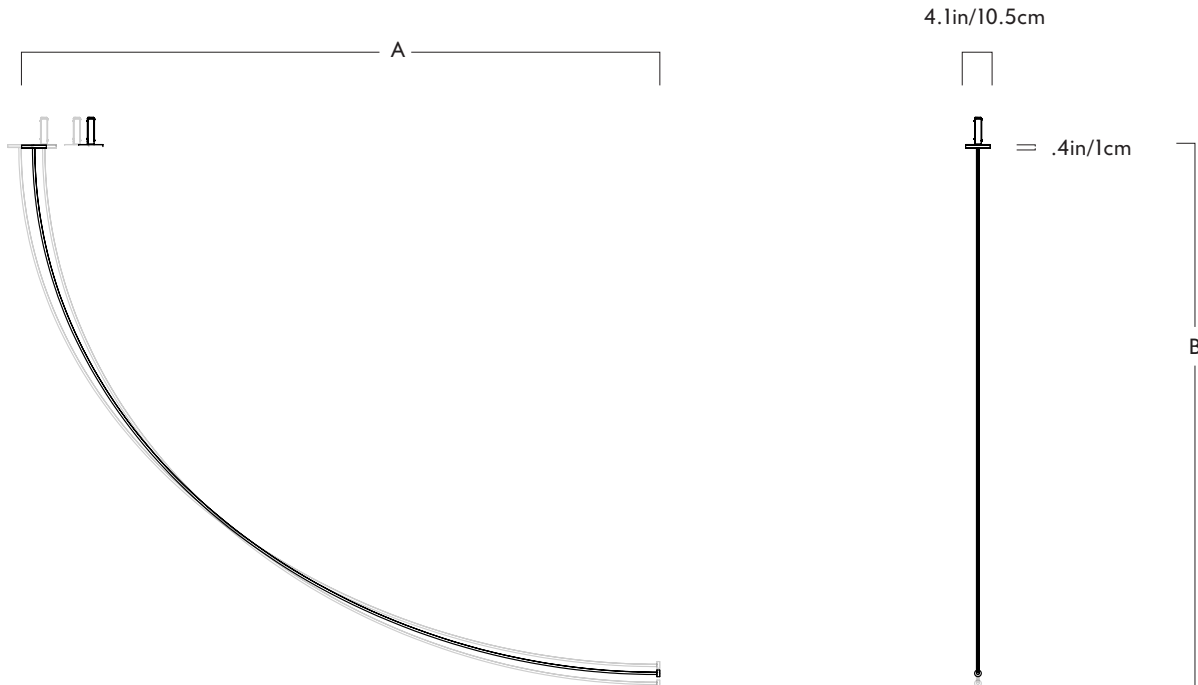

## Pole

## 05 - Surface to Surface - 4 Sections - 240V

### Series

Pole

**Product**  
05 - Surface to Surface - 4 Sections - 240V

Dimensions	A	B
Min.	122in / 310cm	107in / 272cm
Preferred	124in / 315cm	105in / 267cm
Max.	126in / 320cm	103in / 262cm

**Weight**  
6.9lb/3.1kg

**Materials**  
Aluminum, stainless steel, silicone

**Metal Finishes**  
Black

**Large Mount - Powered**  
L 4.1in/10.5cm x W 4.1in/10.5cm x  
H 0.4in/1cm cylindrical plate in matching metal finish.

**Small Mount - Non powered**  
L 1.8in/4.5cm x W 1.8in/4.5cm x  
H 0.3in/.7cm cylindrical plate in matching metal finish


**Driver Box (240V Only)**  
240V version includes box to house drivers. Dimensions are L 1.2in/3cm x W 2.9in/7.5cm x H 4.5in/11.5cm

**Certification**  
CE (240V)

**240V Illumination**  
Integrated LED  
Wattage: 10 Watts  
Lumens: 400 Lumens est.  
Color Temperature: 2700K  
CRI: 90+  
LED Lifetime: 70,000 Hours est.  
Dimming: ELV or 0-10V

**Driver location**  
Driver located in the Driver Box.

**Fixture Mounting**  
Designed to be mounted on standard 4in. Electrical Box.  
Two #8-32 screws included.  
Additional mounting hardware provided for 240V versions.

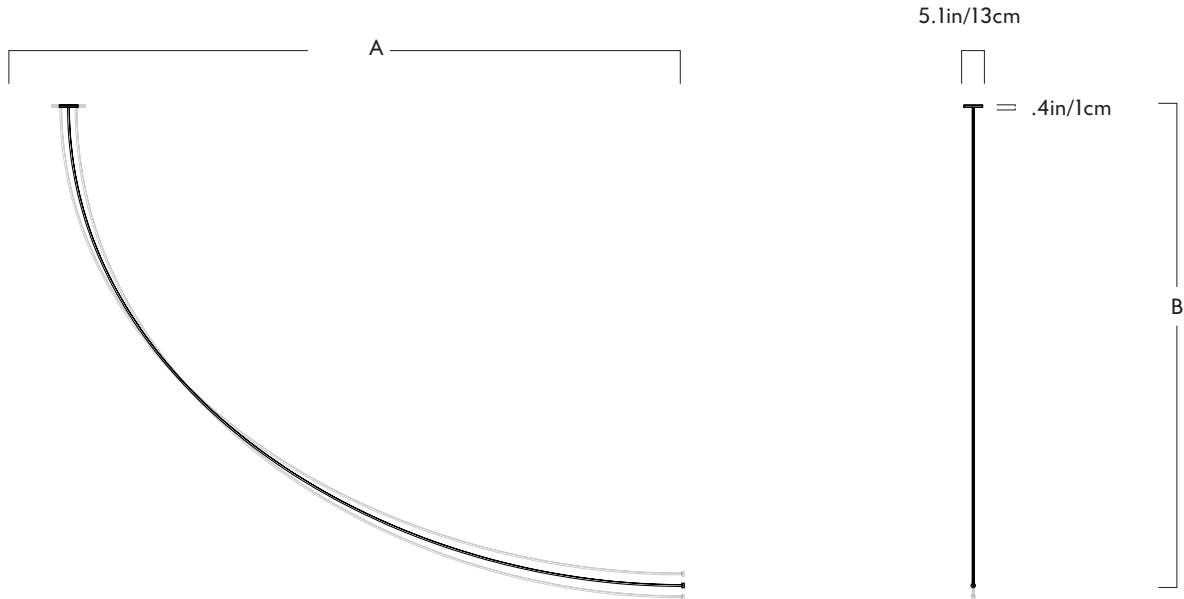

## Pole

## 05 - Surface to Surface - 5 Sections - 120V

### Series

Pole

### Product

05 - Surface to Surface - 5 Sections - 120V

### Dimensions

	A	B
Min.	158in / 401cm	129in / 328cm
Preferred	161in / 409cm	126in / 320cm
Max.	164in / 417cm	123in / 312cm

### Weight

5.6lb/2.5kg

### Materials

Aluminum, stainless steel, silicone

### Metal Finishes

Black

### Large Mount - Powered

L 5.1in/13cm x W 5.1in/13cm x  
H 0.4in/1cm cylindrical plate in matching  
metal finish

### Small Mount - Non powered

L 1.8in/4.5cm x W 1.8in/4.5cm x  
H 0.3in/.7cm cylindrical plate in  
matching metal finish

### Certifications

UL, cUL (120V)

### 120V Illumination


Integrated LED  
Wattage: 13 Watts  
Lumens: 500 Lumens est.  
Color Temperature: 2700K  
CRI: 90+  
LED Lifetime: 70,000 Hours est.  
Dimming: Triac, ELV or 0-10V

### Driver location

Driver located in the J-Box

### Fixture Mounting

Designed to be mounted on standard  
4in. Electrical Box.  
Two #8-32 screws included.

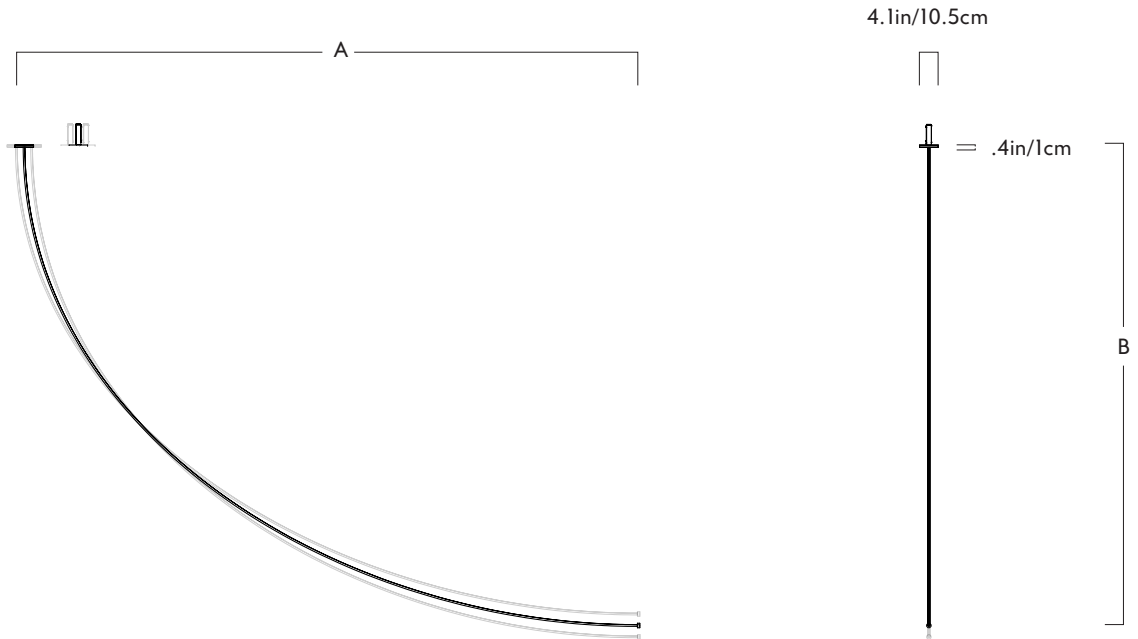

## Pole

## 05 - Surface to Surface - 5 Sections - 240V

### Series

Pole

### Product

05 - Surface to Surface - 5 Sections - 240V

### Dimensions

	A	B
Min.	158in / 401cm	129in / 328cm
Preferred	161in / 409cm	126in / 320cm
Max.	164in / 417cm	123in / 312cm

### Weight

7.5lb/43.4kg

### Materials

Aluminum, stainless steel, silicone

### Metal Finishes

Black

### Large Mount - Powered

L 4.1in/10.5cm x W 4.1in/10.5cm x  
H 0.4in/1cm cylindrical plate in matching  
metal finish.

### Small Mount - Non powered

L 1.8in/4.5cm x W 1.8in/4.5cm x  
H 0.3in/.7cm cylindrical plate in  
matching metal finish

### Driver Box (240V Only)

240V version includes box to house  
drivers. Dimensions are L 1.2in/3cm x W  
2.9in/7.5cm x H 4.5in/11.5cm

### Certification

CE (240V)

### 240V Illumination


Integrated LED  
Wattage: 13 Watts  
Lumens: 500 Lumens est.  
Color Temperature: 2700K  
CRI: 90+  
LED Lifetime: 70,000 Hours est.  
Dimming: ELV or 0-10V

### Driver location

Driver located in the Driver Box.

### Fixture Mounting

Designed to be mounted on standard  
4in. Electrical Box.  
Two #8-32 screws included.  
Additional mounting hardware provided  
for 240V versions.

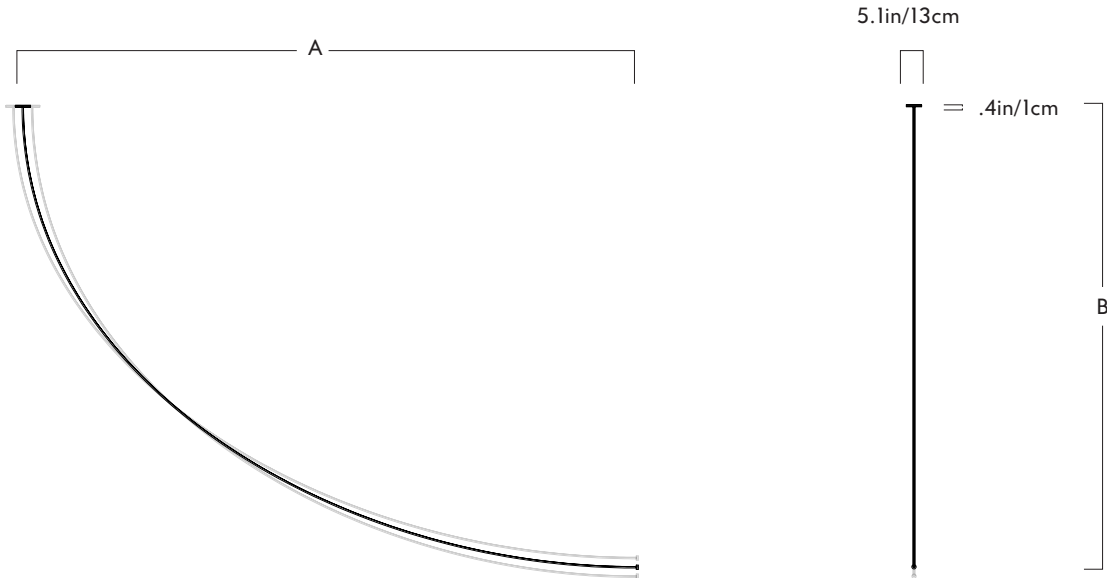

## Pole

## 05 - Surface to Surface - 6 Sections - 120V

### Series

Pole

**Product**  
05 - Surface to Surface - 6 Sections - 120V

Dimensions	A	B
Min.	195in / 495cm	151in / 383cm
Preferred	198in / 503cm	148in / 376cm
Max.	201in / 511cm	145in / 368cm

**Weight**  
6.2lb/2.8kg

**Materials**  
Aluminum, stainless steel, silicone

**Metal Finishes**  
Black

**Large Mount - Powered**  
L 5.1in/13cm x W 5.1in/13cm x  
H 0.4in/1cm cylindrical plate in matching metal finish


**Small Mount - Non powered**  
L 1.8in/4.5cm x W 1.8in/4.5cm x  
H 0.3in/.7cm cylindrical plate in matching metal finish

**Certifications**  
UL, cUL (120V)

**120V Illumination**  
Integrated LED  
Wattage: 15 Watts  
Lumens: 600 Lumens est.  
Color Temperature: 2700K  
CRI: 90+  
LED Lifetime: 70,000 Hours est.  
Dimming: Triac, ELV or 0-10V

**Driver location**  
Driver located in the J-Box

**Fixture Mounting**  
Designed to be mounted on standard 4in. Electrical Box.  
Two #8-32 screws included.

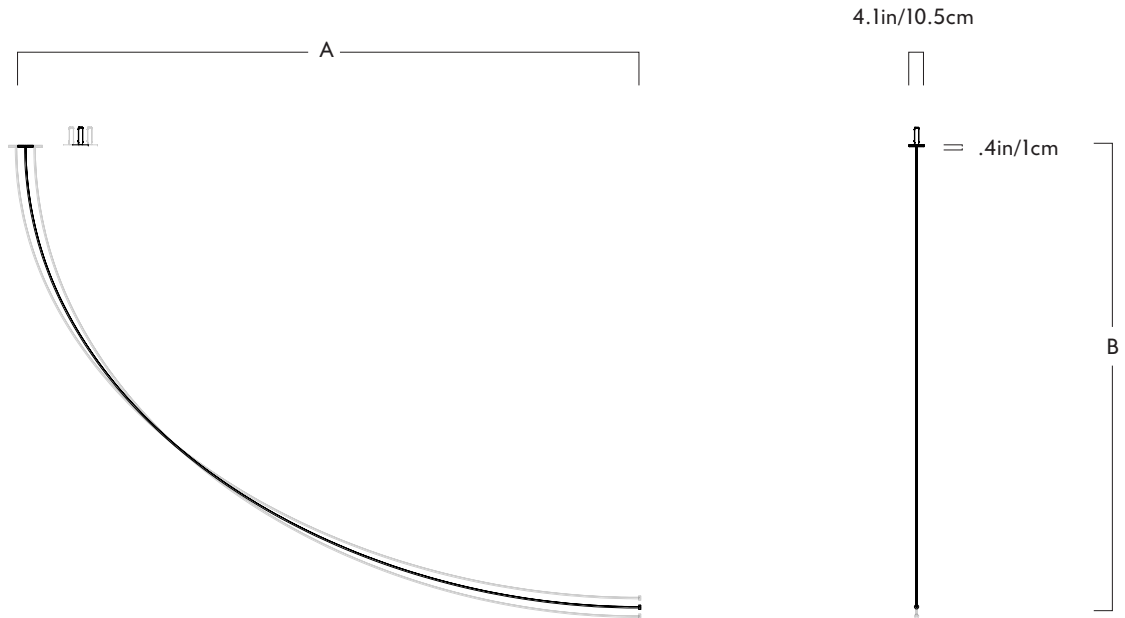

## Pole

## 05 - Surface to Surface - 6 Sections - 240V

### Series Pole

Product  
05 - Surface to Surface - 6 Sections - 240V

<u>Dimensions</u>	A	B
Min.	195in / 495cm	151in / 383cm
Preferred	198in / 503cm	148in / 376cm
Max.	201in / 511cm	145in / 368cm

Weight  
8.1lb/3.7kg

Materials  
Aluminum, stainless steel, silicone

Metal Finishes  
Black

Large Mount - Powered  
L 4.1in/10.5cm x W 4.1in/10.5cm x  
H 0.4in/1cm cylindrical plate in matching  
metal finish.

Small Mount - Non powered  
L 1.8in/4.5cm x W 1.8in/4.5cm x  
H 0.3in/.7cm cylindrical plate in  
matching metal finish

Driver Box (240V Only)  
240V version includes box to house  
drivers. Dimensions are L 1.2in/3cm x  
W 2.9in/7.5cm x H 4.5in/11.5cm


Certification  
CE (240V)

240V Illumination  
Integrated LED  
Wattage: 15 Watts  
Lumens: 600 Lumens est.  
Color Temperature: 2700K  
CRI: 90+  
LED Lifetime: 70,000 Hours est.  
Dimming: ELV or 0-10V

Driver location  
Driver located in the Driver Box.

Fixture Mounting  
Designed to be mounted on standard  
4in. Electrical Box.  
Two #8-32 screws included.  
Additional mounting hardware provided  
for 240V versions.



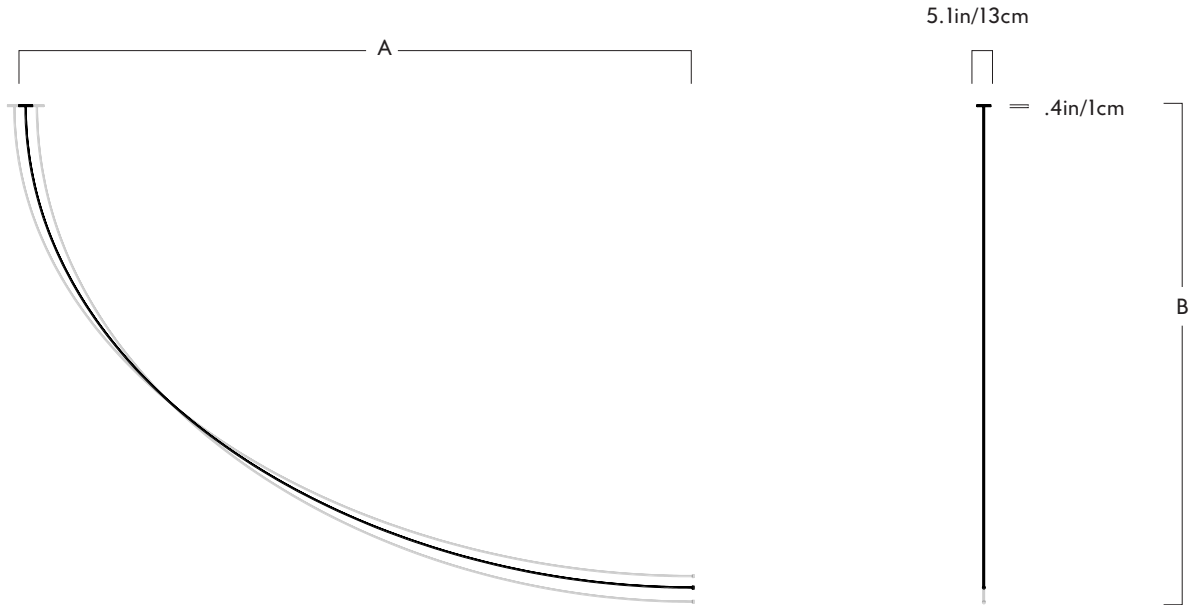

## Pole

## 05 - Surface to Surface - 7 Sections - 120V

### Series Pole

Materials  
Aluminum, stainless steel, silicone

### 120V Illumination

Integrated LED  
Wattage: 18 Watts  
Lumens: 700 Lumens est.  
Color Temperature: 2700K  
CRI: 90+  
LED Lifetime: 70,000 Hours est.  
Dimming: Triac, ELV or 0-10V

Product  
05 - Surface to Surface - 7 Sections -  
120V

### Metal Finishes Black

### Driver location

Driver located in the J-Box

<u>Dimensions</u>	A	B
Min.	231in / 587cm	174in / 442cm
Preferred	235in / 597cm	170in / 432cm
Max.	239in / 607cm	166in / 422cm

Large Mount - Powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 0.4in/1cm cylindrical plate in matching  
metal finish


Small Mount - Non powered  
L 1.8in/4.5cm x W 1.8in/4.5cm x  
H 0.3in/.7cm cylindrical plate in  
matching metal finish

### Fixture Mounting

Designed to be mounted on standard  
4in. Electrical Box.  
Two #8-32 screws included.

Weight  
6.8lb/3.1kg

Certifications  
UL, cUL (120V)

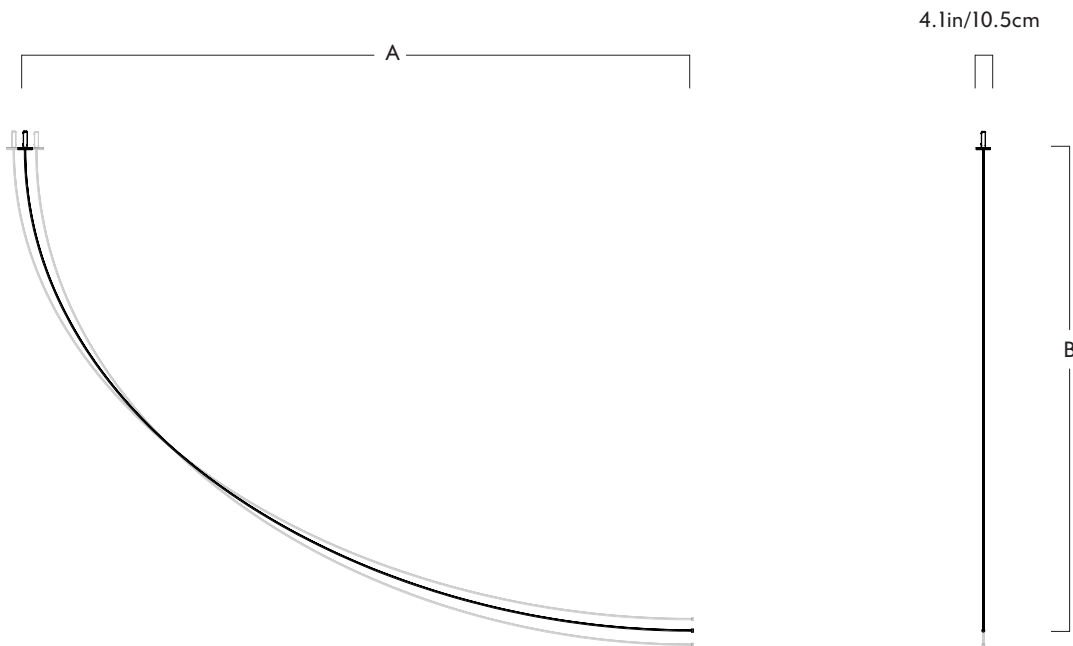

## Pole

## 05 - Surface to Surface - 7 Sections - 240V

Series  
Pole

Materials  
Aluminum, stainless steel, silicone

240V Illumination

Integrated LED  
Wattage: 18 Watts  
Lumens: 700 Lumens est.  
Color Temperature: 2700K  
CRI: 90+  
LED Lifetime: 70,000 Hours est.  
Dimming: ELV or 0-10V

Product  
05 - Surface to Surface - 7 Sections -  
240V

Metal Finishes  
Black

Dimensions

	A	B
Min.	231in / 587cm	174in / 442cm
Preferred	235in / 597cm	170in / 432cm
Max.	239in / 607cm	166in / 422cm

Large Mount - Powered  
L 4.1in/10.5cm x W 4.1in/10.5cm x  
H 0.4in/1cm cylindrical plate in matching  
metal finish.

Driver location

Driver located in the Driver Box.

Weight  
8.7lb/3.9kg


Small Mount - Non powered  
L 1.8in/4.5cm x W 1.8in/4.5cm x  
H 0.3in/.7cm cylindrical plate in  
matching metal finish

Fixture Mounting

Designed to be mounted on standard  
4in. Electrical Box.  
Two #8-32 screws included.  
Additional mounting hardware provided  
for 240V versions.

Driver Box (240V Only)  
240V version includes box to house  
drivers. Dimensions are L 1.2in/3cm x  
W 2.9in/7.5cm x H 4.5in/11.5cm

Certification  
CE (240V)

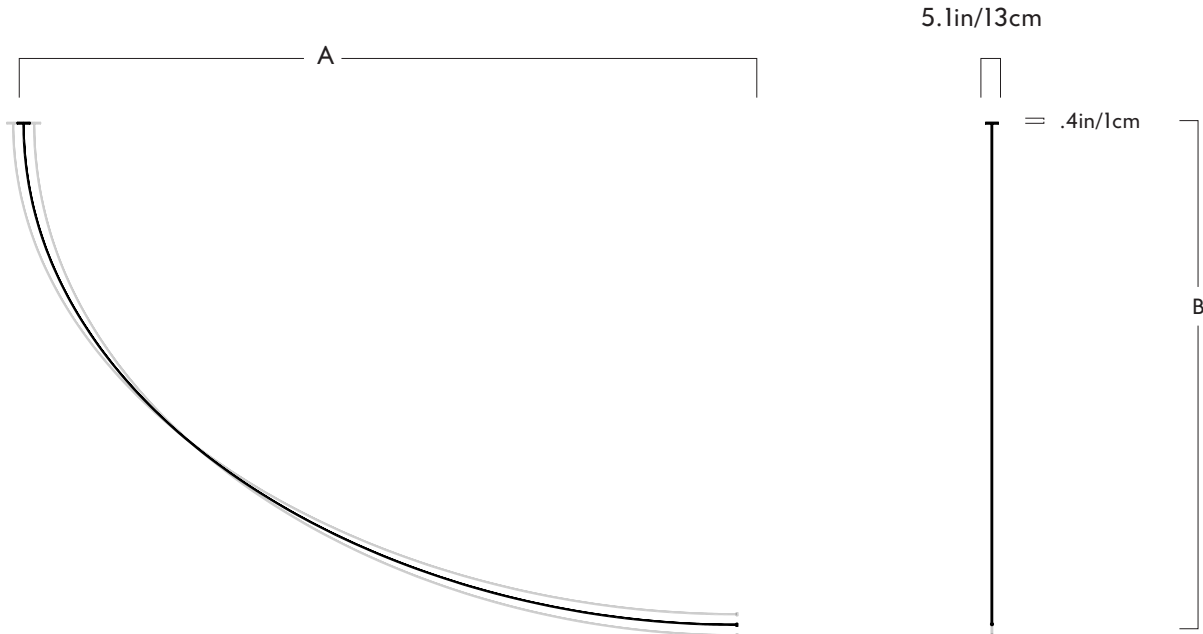

## Pole

## 05 - Surface to Surface - 8 Sections - 120V

### Series

Pole

**Product**  
05 - Surface to Surface - 8 Sections - 120V

Dimensions	A	B
Min.	267in / 678cm	195in / 495cm
Preferred	271in / 688cm	191in / 485cm
Max.	275in / 699cm	187in / 475cm

**Weight**  
7.4lb/3.4kg

**Materials**  
Aluminum, stainless steel, silicone

**Metal Finishes**  
Black

**Large Mount - Powered**  
L 5.1in/13cm x W 5.1in/13cm x  
H 0.4in/1cm cylindrical plate in matching metal finish


**Small Mount - Non powered**  
L 1.8in/4.5cm x W 1.8in/4.5cm x  
H 0.3in/.7cm cylindrical plate in matching metal finish

**Certifications**  
UL, cUL (120V)

**120V Illumination**  
Integrated LED  
Wattage: 20 Watts  
Lumens: 800 Lumens est.  
Color Temperature: 2700K  
CRI: 90+  
LED Lifetime: 70,000 Hours est.  
Dimming: Triac, ELV or 0-10V

**Driver location**  
Driver located in the J-Box

**Fixture Mounting**  
Designed to be mounted on standard 4in. Electrical Box.  
Two #8-32 screws included.

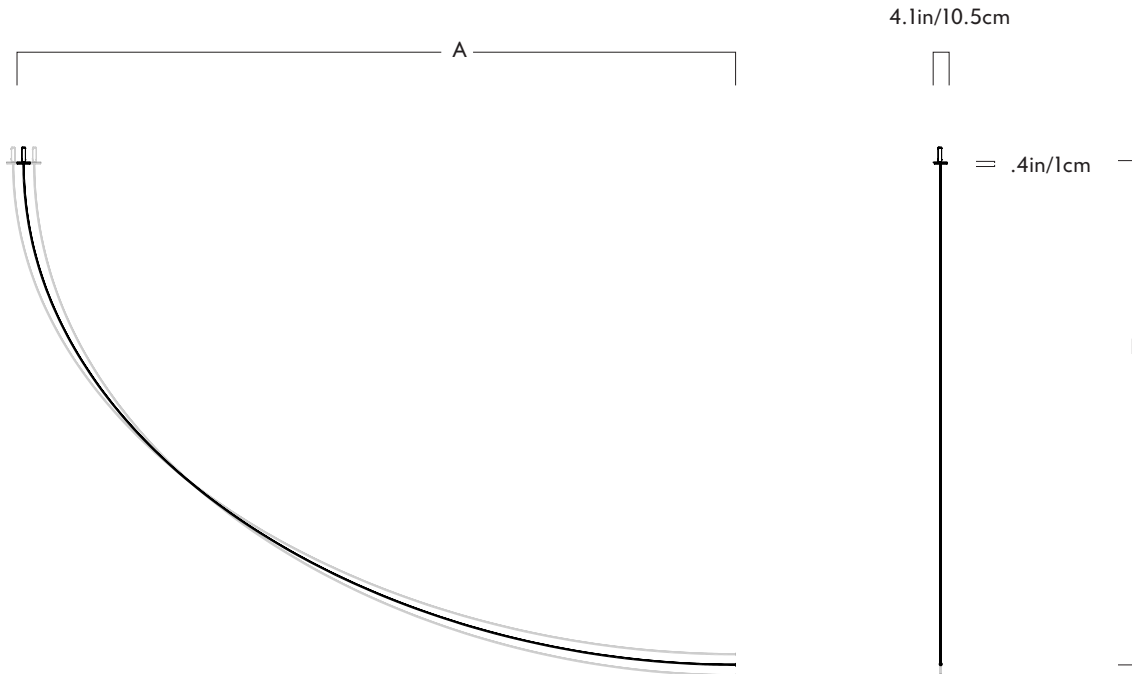

## Pole

## 05 - Surface to Surface - 8 Sections - 240V

### Series Pole

Product  
05 - Surface to Surface - 8 Sections -  
240V

<u>Dimensions</u>	A	B
Min.	267in / 678cm	195in / 495cm
Preferred	271in / 688cm	191in / 485cm
Max.	275in / 699cm	187in / 475cm

Weight  
9.3lb/4.2kg

Materials  
Aluminum, stainless steel, silicone

Metal Finishes  
Black

Large Mount - Powered  
L 4.1in/10.5cm x W 4.1in/10.5cm x  
H 0.4in/1cm cylindrical plate in matching  
metal finish.

Small Mount - Non powered  
L 1.8in/4.5cm x W 1.8in/4.5cm x  
H 0.3in/.7cm cylindrical plate in  
matching metal finish

Driver Box (240V Only)  
240V version includes box to house  
drivers. Dimensions are L 1.2in/3cm x  
W 2.9in/7.5cm x H 4.5in/11.5cm

Certification  
CE (240V)

240V Illumination  
Integrated LED  
Wattage: 20 Watts  
Lumens: 800 Lumens est.  
Color Temperature: 2700K  
CRI: 90+  
LED Lifetime: 70,000 Hours est.  
Dimming: ELV or 0-10V

Driver location  
Driver located in the Driver Box.

Fixture Mounting  
Designed to be mounted on standard  
4in. Electrical Box.  
Two #8-32 screws included.  
Additional mounting hardware provided  
for 240V versions.