

Performance Data Sheet

Model: SQC3 and SQC4

Use Replacement Cartridge 47-55706G2, 66-4706G2 and 47-55710G2 (for SQC3) and-47-55702G2, 47-55704G2, 66-4706G2 and 47-55710G2 (for SQC4)
Reverse Osmosis / Activated Carbon Drinking Water Appliance

The concentration of the indicated substances in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system as specified in NSF/ANSI Standard 58.



System tested and certified by NSF International against NSF/ANSI Standard 42 and against NSF/ANSI Standard 58 for the reduction of substances as listed below according to Standard 42 and 58.

Capacity 8.28 gpd (gallons per day) 31.3 lpd (liters per day)
Contaminant Reduction Determined by NSF testing.

Contaminant Reduction	Average Influent	NSF Specified Challenge Concentration	Avg % Reduction	Average Product Water Concentration	Max Permissible Product Water Concentration	NSF Reduction Requirements	NSF Test Report
Arsenic (pentavalent)	0.31 mg/L	0.30 mg/L ± 10%	99.6%	0.001 mg/L	0.010 mg/L	N/A	J-00058998
Barium	9.7 mg/L	10 mg/L ± 10%	99.4%	0.054 mg/L	2.00 mg/L	N/A	J-00058995
Cadmium	0.030 mg/L	0.03 mg/L ± 10%	99.2%	0.0002 mg/L	0.005 mg/L	N/A	J-00058996
Chromium (Hex.)	0.29 mg/L	0.3 mg/L ± 10% (added as hexavalent)	99.5%	0.001 mg/l	0.1 mg/L	N/A	J-00058994
Chromium (Tri.)	0.31 mg/L	0.3 mg/L ± 10% (added as triavalent)	99.6%	0.001 mg/l	0.1 mg/L	N/A	J-00058995
Copper	2.9 mg/L	3.0 mg/L + 10%	99.4%	0.01 mg/L	1.3 mg/L	N/A	J-00058999
Cyst	187,000 cysts/L	Minimum 50,000 cysts/L	99.99%	6 cyst/L	N/A	≥99.95%	J-00058998
Fluoride	9.1 mg/L	8.0 mg/L ± 10%	98.0%	0.18 mg/L	1.5 mg/L	N/A	J-00058997
Lead	0.15 mg/L	0.15 mg/L ± 10%	99.3%	0.001 mg/L	0.010 mg/L	N/A	J-00058996
Radium 226/228	25 pCi/L	25 pCi/L ± 10%	80.0%	5 pCi/L	5 pCi/L	N/A	J-00058995
Selenium	0.1 mg/L	0.10 mg/L ± 10% (added as ½ selenite and ½ selenate)	98.0%	0.002 mg/L	0.05 mg/L	N/A	J-00058997
Total Dissolved Solids (TDS)	740	750 mg/L ± 40 mg/L (added as sodium chloride)	94.1%	43 mg/L	N/A	≥ 75%	J-00034261
Turbidity	117 NTU	11 ± 1 NTU	99.9%	0.11 NTU	0.5 NTU	N/A	J-00058998
Chlorine Taste and Odor	2.0 mg/L	2.0 mg/L ± 10%	78%	0.44 mg/L	N/A	≥ 50%	J-00040293
Nominal Particulate Class I, ≥0.5 to < 1.0 µm	15,666,667 pts/mL	At least 10,000 particles/mL	99.4%	85,567 pts/mL	N/A	≥85%	J-00040295

Available From:



Performance Data Sheet

Model: SQC3 and SQC4

Use Replacement Cartridge 47-55706G2, 66-4706G2 and 47-55710G2 (for SQC3) and 47-55702G2, 47-55704G2, 66-4706G2 and 47-55710G2 (for SQC4)
Reverse Osmosis / Activated Carbon Drinking Water Appliance

Application Guidelines/Water Supply Parameters			
Membrane Type	TFCM	Water Supply Parameters	
Water Supply, chlorinated or non-chlorinated		Component	Limit
		Hardness	<350 mg/L
Water Pressure	40-100 psi (276 -690 kPA)	Iron	<0.1 mg/L
Water Temperature	40° F - 100° F (4.4° C - 38° C)	Manganese	<0.05 mg/L
pH Range	4.0 – 11.0	Hydrogen Sulfide	0
Maximum TDS level	2000	Turbidity	<1 NTU

System Production: 8.28 gal/day (31.3 L/day)

Post Filter Chlorine Taste and Odor capacity: 2,500 gallons (9,463 liters)

System Efficiency: 13.06% Efficiency rating means the percentage of the influent water to the system that is available to the user as reverse osmosis treated water under operating conditions that approximate typical daily usage.

It is essential that the manufacturer's recommended installation, maintenance and filter replacement requirements be carried out for the product to perform as advertised. See Installation Manual for Warranty information.

Note: While the testing was performed under standard laboratory conditions, actual performance may vary.

Important Quality Assurance Requirements: These Reverse Osmosis Drinking Water Appliances contain treatment components that are critical for effective reduction of Total Dissolved Solids as well as inorganic contaminants. We strongly recommend that the user test the water a minimum of every 6 months to verify that the appliance is performing satisfactorily. A built in Percent Rejection (PR) water quality monitor is available* to provide the user with a means to test the water at any time, or your dealer may offer a semi-annual testing service.

*as an option at additional cost

Replacement Cartridge: 47-55706G2, 66-470G2 and 47-55710G2 (for SQC3) and 47-55702G2, 47-55704G2, 66-470G2 and 47-55710G2 (for SQC4). For estimated costs of replacement elements please call 1-800-733-1199 or visit our website at www.3Mpurification.com



To reduce the risk associated with ingestion of contaminants:

- **Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before and after the system. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts.**

EPA Establishment Number 070595-CT-001

CAUTION

To reduce the risk associated with property damage due to water leakage:

- **Read and follow** Use Instructions before installation and use of this system.
- Installation and use **MUST** comply with all state and local plumbing codes.
- **Do not** install if water pressure exceeds 100 psi (690 kPa). If your water pressure exceeds 80 psi, you **must** install a pressure limiting valve. Contact a plumbing professional if you are uncertain how to check your water pressure.
- **Do not** install where water hammer conditions may occur. If water hammer conditions exist you **must** install a water hammer arrester. Contact a plumbing professional if you uncertain how to check for this condition.
- **Do not** install on hot water supply lines. The maximum operating water temperature of this filter system is 100° F (38° C).
- **Protect filter from freezing.** Drain filter when temperatures drop below 40°F (4.4°C).
- The disposable filter cartridges **must** be replaced every 12 months or sooner, if a noticeable reduction in flow rate occurs.

Performance Data Sheet

Model: SQC3 and SQC4

Use Replacement Cartridge 47-55706G2, 66-4706G2 and 47-55710G2 (for SQC3) and 47-55702G2, 47-55704G2, 66-4706G2 and 47-55710G2 (for SQC4)
Reverse Osmosis / Activated Carbon Drinking Water Appliance


Routine Maintenance

Sediment Prefilter and Carbon Postfilter: Change every twelve months to one year depending on feed water quality.

Membrane: Change as required based on periodic TDS rejection tests or an on-site monitor (PR). The maximum recommended service life is 36 months. If a Percent Rejection (PR) Monitor is not used, then your dealer may offer a semi-annual testing service.

Please refer to the Installation and Operation Manual for complete maintenance requirements.

Parts Diagram

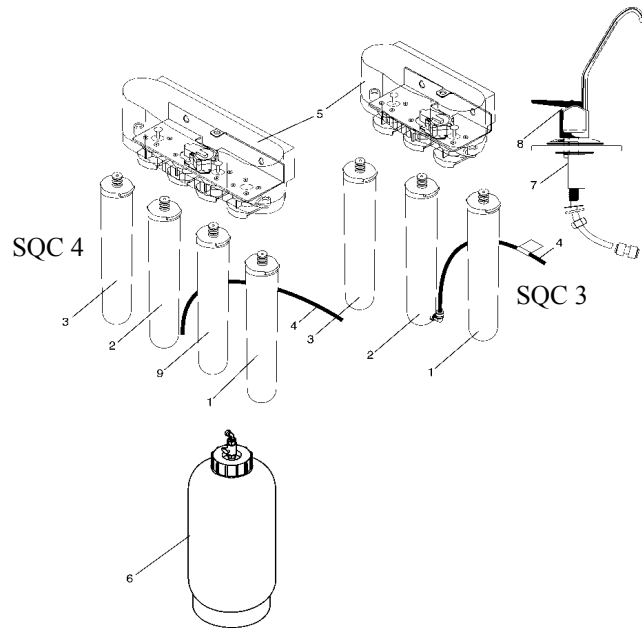

Parts List

- 1) Sediment Prefilter – 47-55702G2 (SQC4)
Sediment/Carbon Prefilter – 47-55706G2 (SQC3 only)
- 2) RO Membrane – 66-4706G2
- 3) Carbon Block Filtration – 47-55710G2
- 4) SFC HF Flow Control – 52-318212
- 5) Shroud 3 head 85-1650
Shroud 4 head 85-1651
- 6) Storage Tank 56-18125
- 7) Faucet Adapter 74-3130604
- 8) Faucet 69888-50
- 9) Granular Carbon Filter – 47-55704G2 (SQC4 only)
Faucet % Rejection Monitor (Optional-Not Shown) 28-251003

Performance Data Sheet

Model: SQC3 and SQC4

Use Replacement Cartridge 47-55706G2, 66-4706G2 and 47-55710G2 (for SQC3) and-47-55702G2, 47-55704G2, 66-4706G2 and 47-55710G2 (for SQC4)
Reverse Osmosis / Activated Carbon Drinking Water Appliance

Systems must be installed and operated in accordance with manufacturer's recommended procedures and guidelines. Failure to follow installation, operation, and maintenance instructions may result in leakage and will void warranty. See Installation Manual for Warranty information.

This system has been tested for the treatment of water containing pentavalent arsenic (also known as As (V), As (+5), or arsenate) at concentrations of 0.30 mg/L or less. This system reduces pentavalent arsenic, but may not remove other forms of arsenic. This system is to be used on water supplies containing a detectable free chlorine residual or on water supplies that have been demonstrated to contain only pentavalent arsenic. Treatment with chloramine (combined chlorine) is not sufficient to ensure complete conversion of trivalent arsenic to pentavalent arsenic. Please see the Arsenic Facts section below for further information.

ARSENIC FACT SECTION

Arsenic (abbreviated As) is found naturally in some well water. Arsenic in water has no color, taste or odor. It must be measured by a lab test. Public water utilities must have their water tested for arsenic. You can get the results from your water utility. If you have your own well, you can have the water tested. The local health department or the state environmental health agency can provide a list of certified labs. The cost is typically \$15 to \$30. Information about arsenic in water can be found on the internet at the US Environmental Protection Agency website: www.epa.gov/safewater/arsenic.html

There are two forms of arsenic: pentavalent arsenic (also called As(V) or As+5), and arsenate) and trivalent arsenic (also called As(III), As(+3), and arsenite). In well water, arsenic may be pentavalent, trivalent, or a combination of both. Special sampling procedures are needed for a lab to determine what type and how much of each type of arsenic is in the water. Check with the labs in your area to see if they can provide this type of service.

Reverse osmosis (RO) water treatment systems do not remove trivalent arsenic from water very well. RO systems are very effective at reducing pentavalent arsenic. A free chlorine residual will rapidly convert trivalent arsenic to pentavalent arsenic. Other water treatment chemicals such as ozone and potassium permanganate will also change trivalent arsenic to pentavalent arsenic. A combined chlorine residual (also called chloramines) may not convert all the trivalent arsenic. If you get your water from a public water utility, contact the utility to find out if free chlorine or combined chlorine is used in the water system.

The SQC3 & SQC4 systems are designed to reduce pentavalent arsenic. They will not convert trivalent arsenic to pentavalent arsenic. These systems were tested in a lab. Under those conditions, the system reduced [0.30 mg/L (ppm) or 0.050 mg/L (ppm)] pentavalent arsenic to 0.010 mg/L (ppm) (the USEPA standard for drinking water) or less. The performances of these systems may be different at your location. Have the treated water tested for arsenic to check if your system is working properly.

The pentavalent arsenic reduction component of this system must be replaced at the end of its useful life of three years. The replacement component 66-4706G2 can be purchased from the original point of purchase or from Water Factory Systems at 1-800-733-1199.

3M is a trademark of 3M Company.
NSF is a trademark of NSF International.
© 2010 3M Company. All rights reserved.
INSTR6052 0310

Available From: 
eFilter Water
CLICK HERE Your Health Matters!

3M Purification Inc.
400 Research Parkway
Meriden, CT 06450 U.S.A
Toll Free: 1-800-733-1199
Worldwide: 203-237-5541
Fax: 203-238-8701