




- **Separation without the need for tools\***  
into 3 components,  
space-saving storage/transport

**Universal motor**  
powerful, robust,  
high torque

**Protective grating\***  
easy and safe pouring into  
bucket

**Safety switch**  
cut-off in case of opening the  
protective grating – protec-  
tion of the user

**Draught-bar**  
Integrated transport cart  
with draught-bar– mobile use of  
the bucket

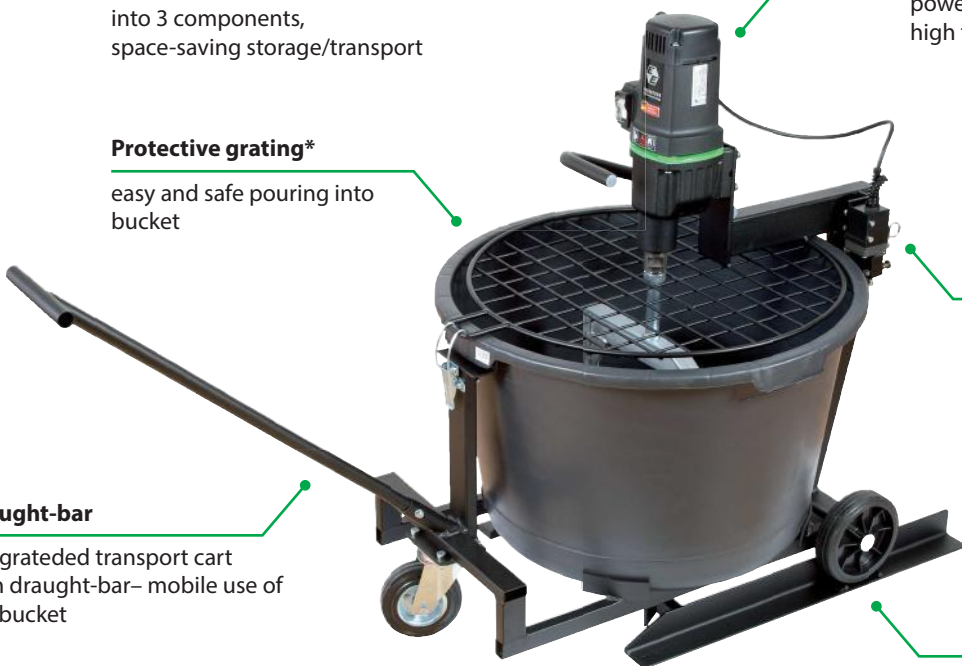

**Transport rollers**  
for mobile use

*\* not present on all models*

## FEATURES OF MIXING STATIONS

Our mobile mixing stations offer a compact size and low weight but also maintain high torque.

The drive motor can be removed quickly and effortlessly to allow easy transport of the unit whilst also saving space.



**Patented system**  
**Innovative drive solution:**  
**one motor – two contra**  
**rotating mixing tools**



**Timer for setting the**  
**requested mixing time**  
**(accessory for TwinMix 1800 T)**

**50 kg**



SPECIFICATIONS	TWINMIX 1800 T
Power input	1800 W
Rated voltage	230 V ~
Rated- /No-load speed mixing rod	250/450 rpm
Rated- /No-load speed mixing paddle	20/36 rpm
Bucket size	65 l
Spindle connection	M 14/Special
Weight	70.0 kg
Order no.	07623000
Supplied	on a pallet incl. mixing rod, mixing paddle, bucket 65 l and transport carriage

## Mixing station TwinMix 1800 T

### The mobile station for thorough mixing with a wide range of application

#### APPLICATION:

- Homogeneous and lump free mixing of numerous materials with different viscosity
- Especially convenient for the mixing of self-levelling floor levelling compounds, plaster, thin-bed mortar, fillers
- Building construction and civil engineering, landscaping, floor renovators, tilers

#### FEATURES:

- Mixing paddle with scraper – avoids material deposits on the bucket rim and ensures together with a fast running inner rod a better mixing
- Two electronic speed levels – start mixing function with reduced speed
- Transport carriage with handles and big wheels – mobile use of the station at the construction sites, also at rough terrain
- Robust universal motor – very high pulling power
- Electronic – soft start, constant speed, temperature control and over current cut-off
- Switch with dust protection and protection against re-start
- Safety Switch – cut-off in case of opening the hood, protection of the operator
- Connection for dust exhaust Ø 35 mm as well as funnel tube with brushes – dust reduced filling and mixing of the materials
- Tipper (accessory) especially designed for clean and precise pouring of self-levelling filler and levelling compounds
- Mixing carriage (supplied) can be used separate from the station – flexible and mobile at the job site

#### ACCESSORIES



Transport carriage with 2 big wheels  
 Order no.: 09Z11000



Tipper with 4 wheels (2 steerable)  
 Order no.: 09Z12000



Timer for TwinMix 1800 T  
 Order no.: 32352000



Bucket 65 l  
 Order no.: 32341000




## Fast, uninterrupted work when using several mixing carriages, f. e. for levelling filler

- ☒ saves time and costs
- ☒ reduces the risk that the material is setting too fast in wet-on-wet cycle

 saves at least **50% time**

10:15

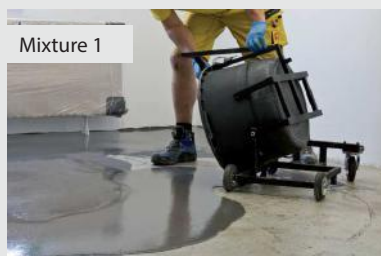

10:20



### VERSATILE APPLICATION POSSIBILITIES



masonry mortar



thin-bed mortar



plaster



floating screed



tile cement



two-component materials



insulation board adhesive



screed



filler

### Health protecting mixing (dust reduced construction site, especially in the interior)

- ☒ Hazardous dust (e. g. silica dust) has to be suctioned by a Dust Class M Vacuum Cleaner! For our electric power tools we are recommending to use a Vacuum Cleaner of our Eibenstock DSS range!

