


FUNKY Monkey bars®

ROCKET RINGS Section 2

LACHE BARS Section 1

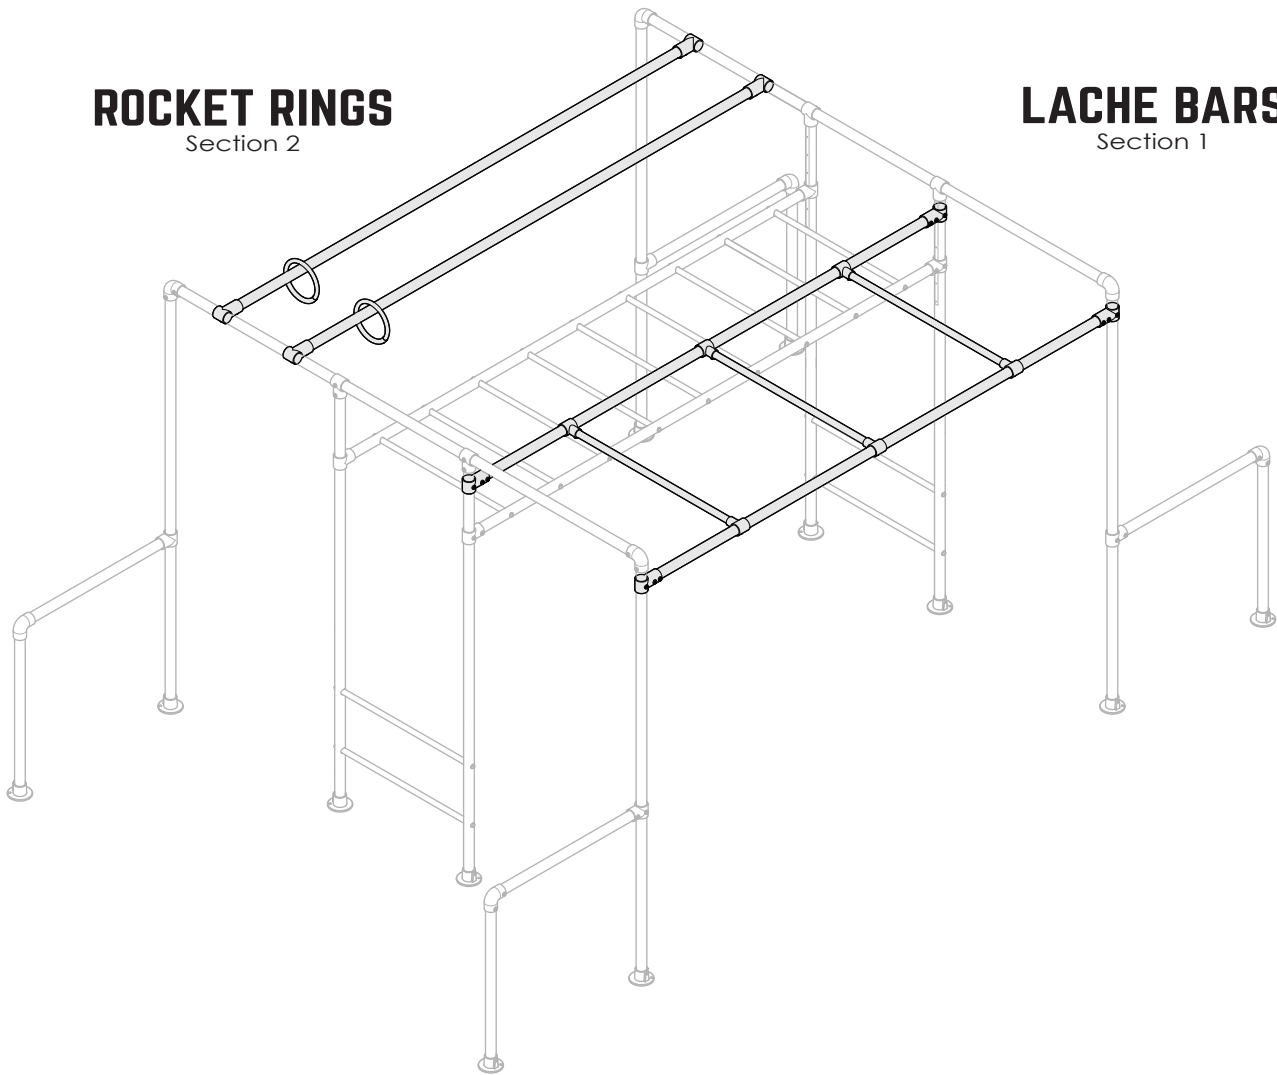

ROCKET RINGS &/OR LACHE BARS ADD-ON ASSEMBLY INSTRUCTIONS

CONTENTS

Warnings Page 1
Assembly Tips Page 3
Inventory Page 4
Assembly Instructions Page 5

Section 1 - Lache Bars. Page 5
Frame Preparation Page 6
Lache Bar Assembly Page 8
Swing Leg Assembly. Page 10

Section 2 - Rocket Rings. Page 13
Frame Preparation Page 14
Accessories Bar Assembly Page 15

Maintenance Page 18

WARNING

PLEASE CAREFULLY READ ALL INFORMATION CONTAINED IN THIS ASSEMBLY MANUAL BEFORE YOU INSTALL AND USE YOUR FUNKY MONKEY BARS®.


SAFETY NOTICE

1. Any person handling or using the Funky Monkey Bars® products must follow the instructions as described in this document. The person in charge of assembling and using the equipment must ensure that the recommendations for use given in this document are seen by all users.
2. Only use the Funky Monkey Bars® after they have been fully assembled and after checking that the fittings are tightened properly (*refer to page 3 - Correct Tightening Method*).
3. DO NOT install your Funky Monkey Bars® over concrete, asphalt, packed earth, wood decking or any other hard surface. A fall onto a hard surface can result in serious injury or death.
4. Inspect all grub screws, bolts and nuts at the beginning of each play session to ensure your Funky Monkey Bars® are tight and secure.
5. Ensure all tubes are fully inserted into fittings until you hear the magic "CLUNK" sound.
6. Ensure your Funky Monkey Bars® are properly secure at ALL times. Pegs are in place and inserted fully into the ground.
7. DO NOT exceed the maximum load/weight limit as recommended by Funky Monkey Bars®.
8. Children should be supervised by an adult at all times.
9. Installing a gym/crash mat under the fall zone area of your Funky Monkey Bars® would be recommended for children learning this new skill. This will reduce the chance of injury and build the child's confidence while they build strength and master the skill.
10. Ensure you have thoroughly read your assembly and installation instructions and viewed our on-line installation videos at <https://www.funkymonkeybars.com/blogs/installation-maintenance-videos>
11. DO NOT climb, sit or stand on top of the monkey bar (horizontal ladder) section.
12. DO NOT jump from the top of any section of the monkey bar.
13. DO NOT use your Funky Monkey Bars® when wet as the steel will be slippery.
14. DO NOT attach items to your frame that are not designed specifically to be used with Funky Monkey Bars®, especially lower quality products that have not been approved by Funky Monkey Bars®.
15. Ensure the height of your Funky Monkey Bars® (horizontal ladder) are set at a level that is age appropriate.
16. DO NOT install your Funky Monkey Bars® over or near objects that could interfere with users in an unsafe way. Maintain a clear area around your Funky Monkey Bars®.
17. DO NOT use your Funky Monkey Bars® while under the influence of drugs and alcohol.
18. Wear clothing free of drawstrings, hooks, loops or anything that could get caught while using your Funky Monkey Bars® and result in entanglement and/or strangulation.


ASSEMBLY

1. Keep small children away from the Funky Monkey Bars® during assembly.
2. Do not attempt to use the Funky Monkey Bars® until it is completely assembled and every fitting is tight and secured.
3. Installation typically takes 1-2 hours to complete. Two people are recommended for assembly.
4. Ensure all fittings are tightened to the correct tightening method as described on page 3.
5. Assembly should be carried out on clean, dry, level surface


Please refer to the video section on the Funky Monkey Bars® website for more handy tips and assembly instructions at <http://www.funkymonkeybars.com/pages/videos>



Assembly requires 2 adults.

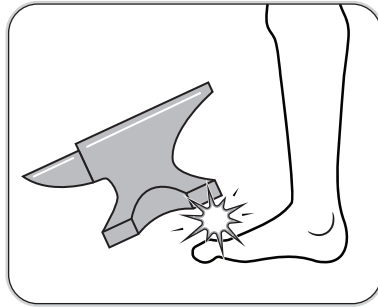

Heavy items !

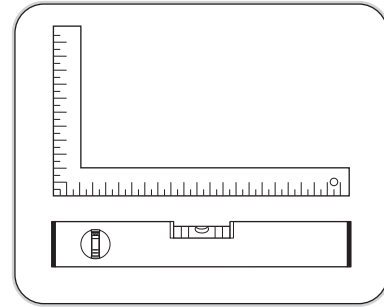

Work on flat level surface.

LOCATION

1. A safe fall zone around your Funky Monkey Bars® is essential. A minimum distance of 1.5m to 2m (5 ft to 6.5ft) is recommended around the elevated hanging points of your Funky Monkey Bars®.
2. Place your Funky Monkey Bars® on level ground, away from any structure or obstruction such as a fence, garage, house, overhanging branches, laundry lines or electrical wires and remove any obstructions beneath your Funky Monkey Bars®.
3. Ensure your Funky Monkey Bars® are positioned away from retaining walls, pool fences, structures and other play equipment. Maintain a clear space around the whole perimeter of your Funky Monkey Bars®.
4. Place your Funky Monkey Bars® on the most level surface available.

MAINTENANCE


1. At the beginning of each heavy play session we recommend the following maintenance processes be performed on your Funky Monkey Bars®:
 - Tighten all bolts, grub screws and applicable hardware (as per page 3)
 - Lubricate all metallic moving parts as per instructions (flying fox, swing hooks etc)
 - Check all protective coverings on bolts, pipes, edges and corners. Replace if they are loose, cracked or missing.
 - Check all moving parts including swing seats, shackles, snap hooks, chains and trolleys for wear, rust, or other deterioration. Replace as needed.
2. Twice a month during play season we would recommend the following maintenance processes be performed on your Funky Monkey Bars®:
 - Tighten all connections and hardware
 - Check all protective coverings on bolts, pipes, edges and corners. Replace if they are loose, cracked or missing.
3. Once a month during play season we would recommend the following maintenance processes be performed on your Funky Monkey Bars®:
 - Lubricate all metallic moving parts as per instructions (flying fox, swing hooks etc). If swings start to squeak then lubricate swing hooks.
 - Check all moving parts including swing seats, ropes, chains and trolleys for wear, rust, or other deterioration. Replace as needed.
 - Owners shall be responsible for maintaining the legibility of any warning labels.

For additional information concerning your Funky Monkey Bars®, please contact our customer service team or check our website for any important updates. Phone - 1300 912 198 or www.funkymonkeybars.com


ASSEMBLY TIPS

CORRECT INSERTION INTO FITTINGS - (INDICATIVE DIAGRAM SHOWN)

All tubes must be fully inserted until contact is made with adjoining tube.

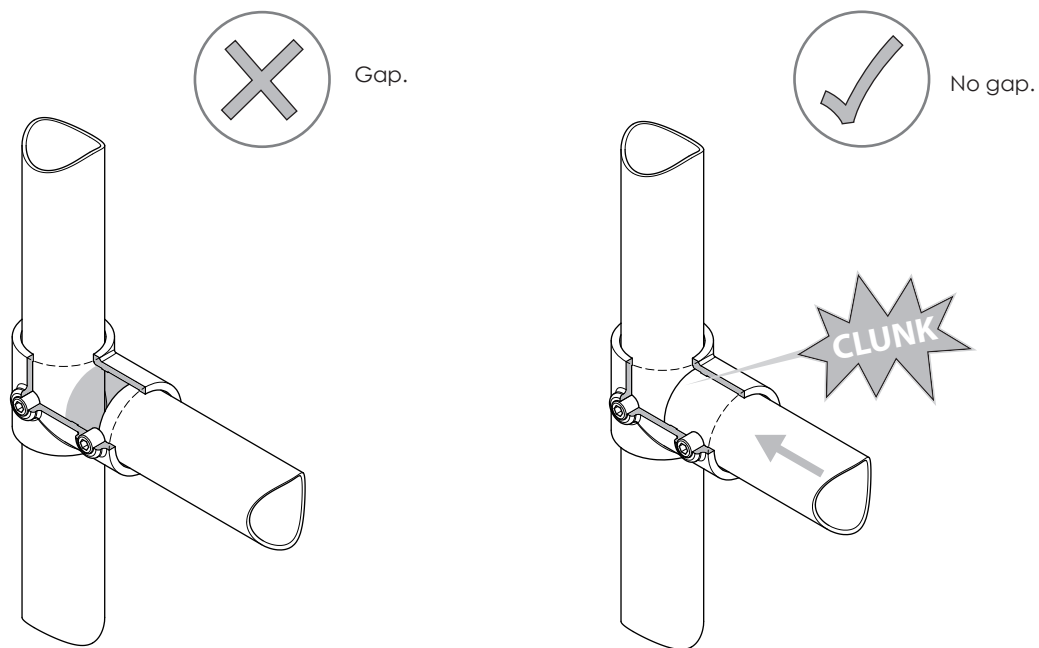


CORRECT TIGHTENING METHOD OF GRUB SCREWS - (INDICATIVE DIAGRAM SHOWN)

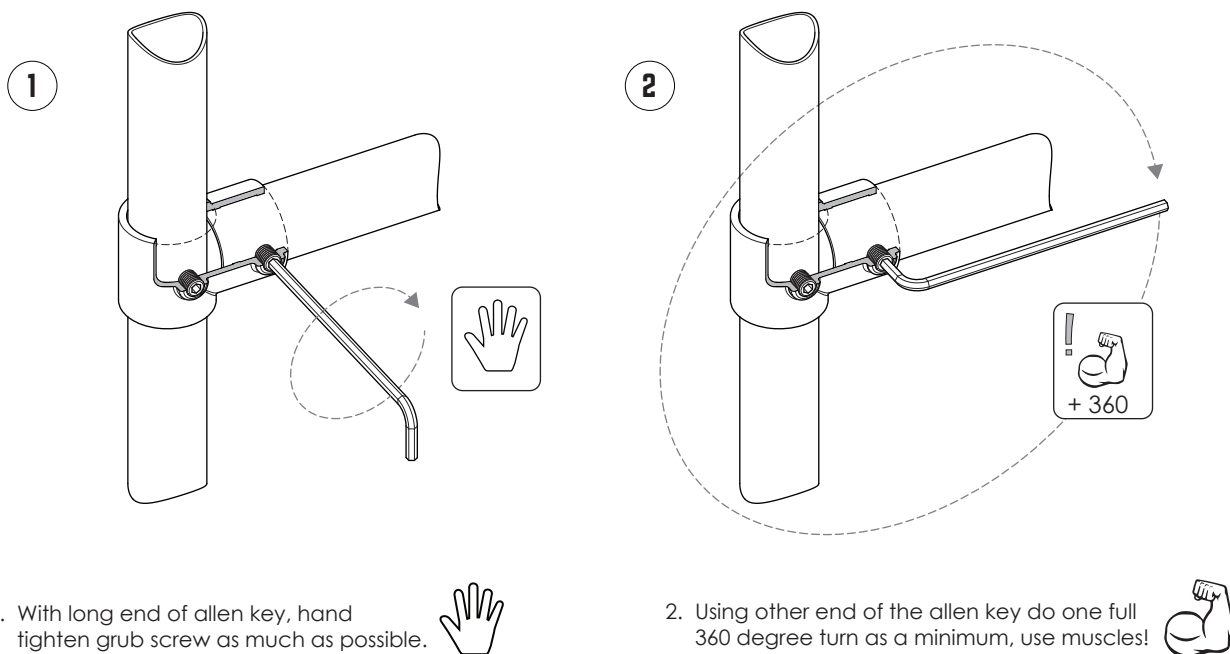


INVENTORY


TOOLS REQUIRED FOR INSTALLATION




1x
8mm Allen key
(Included)

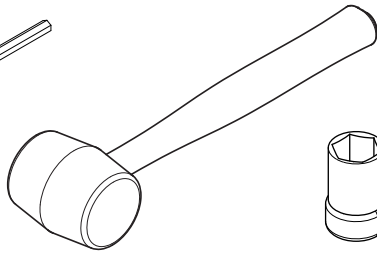


1x
Soft Hammer
(Not included)



1x
17mm Ratchet
(Not included)



1x
Spirit Level
(Not included)





1x
Tape Measure
(Not included)


**THE INVENTORY AND ASSEMBLY METHOD WILL VARY ACCORDING TO THE PURCHASED ADD-ON
SECTION 1 - YOUR SUPPLIED PACK WILL BE THE LACHE BARS. SECTION 2 - YOUR SUPPLIED PACK WILL BE THE ROCKET RINGS.**

INVENTORY - LACHE BARS - SECTION 1 (PAGES 5-12.) Not to scale

3x Lache Tube
33Dia. x 1040mm




6x
Reducing Tee
D-101 D48-B34

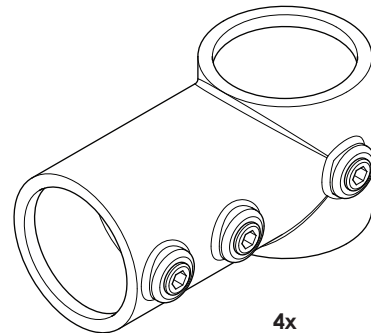

4x
Long Short Tee
D-101L



2x Accessories Tube
50Dia. x 2950mm



OR

INVENTORY - ROCKET RINGS - SECTION 2 (PAGES 13-18) Not to scale

2x
Rocket Rings

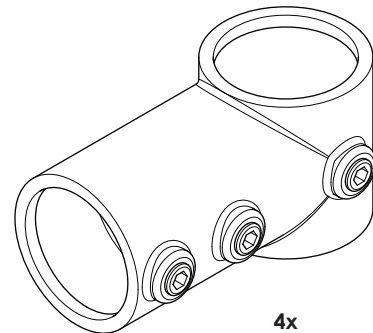

4x
Long Short Tee
D-101L

2x Accessories Tube
50Dia. x 2950mm




SECTION 1

THE FOLLOWING ASSEMBLY INSTRUCTIONS ARE FOR THE LACHE BARS.
FOR ROCKET RINGS ASSEMBLY INSTRUCTIONS PLEASE REFER TO SECTION 2 (PAGE 13)

1 SELECT DESIRED LOCATION OF LACHE BARS


(Assembly for Gorilla shown in example)



Choose the location for the Lache bars to be installed and check that the swing leg to adjustable leg are separated by 1040mm both ends.


If not remove pegs on A,B,C & D - loosen all short tees on swing bars and slide the frame evenly into position.

Adjust until correct. Check level and square then re-peg.

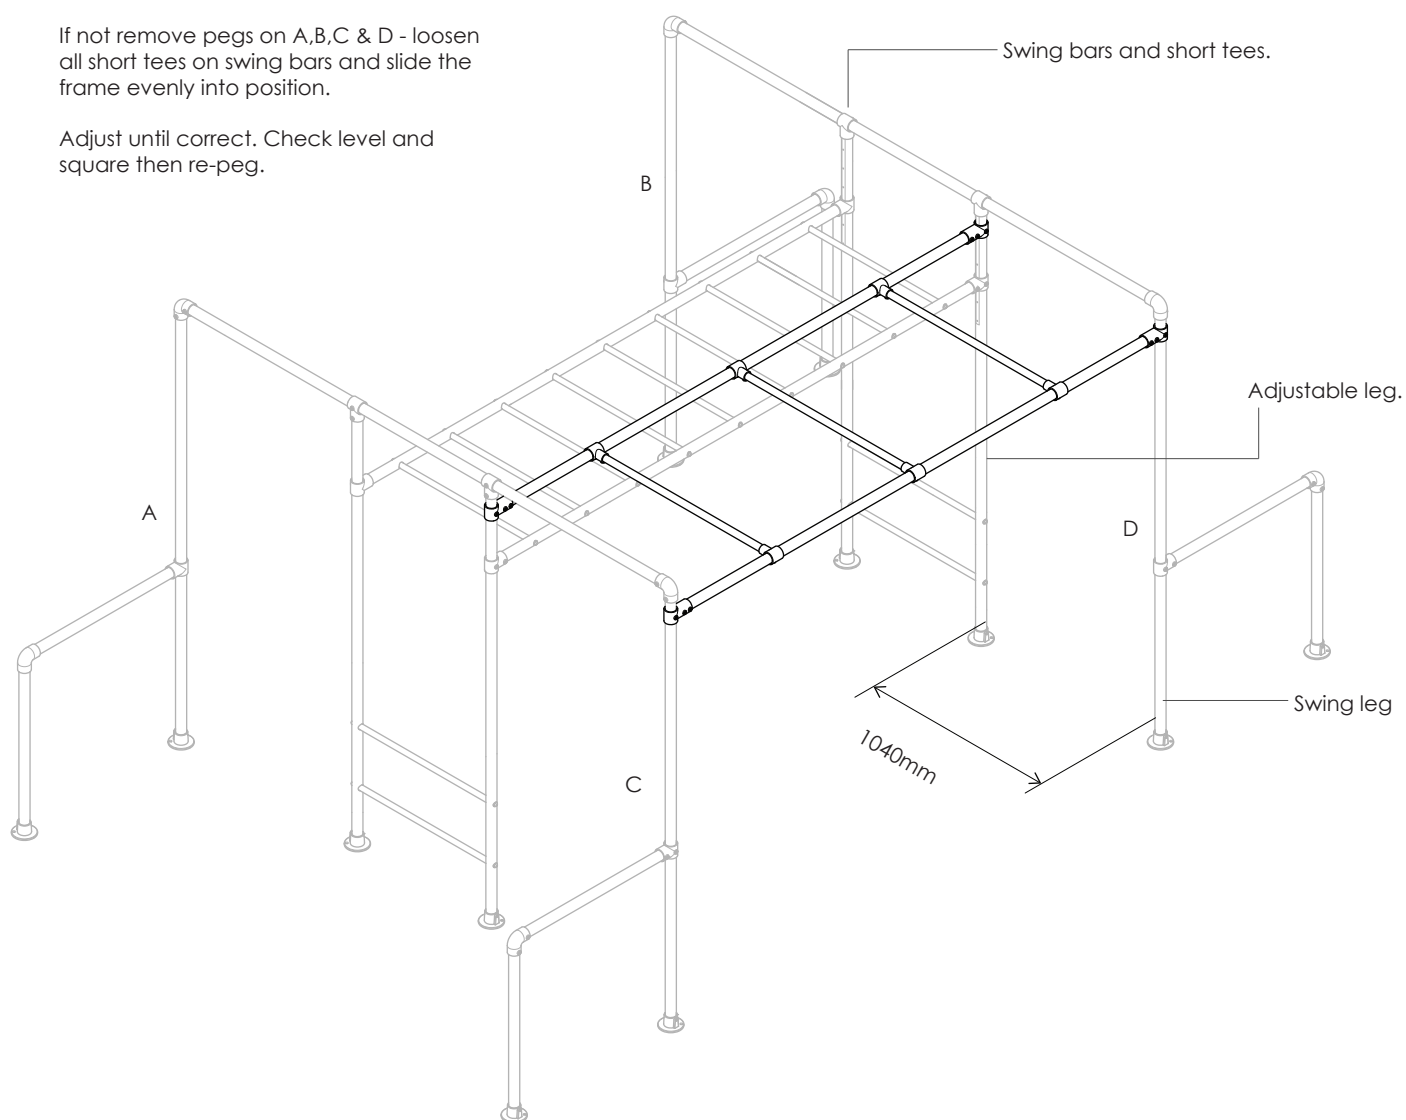


ASSEMBLY INSTRUCTIONS - FRAME PREPARATION


2 REMOVE PEGS & LOOSEN ELBOWS



1. On the selected install side remove base plate pegs.
2. Loosen all grub screws on elbows connecting swing bars to swing legs on the install side (A and B).




Remove pegs x4.

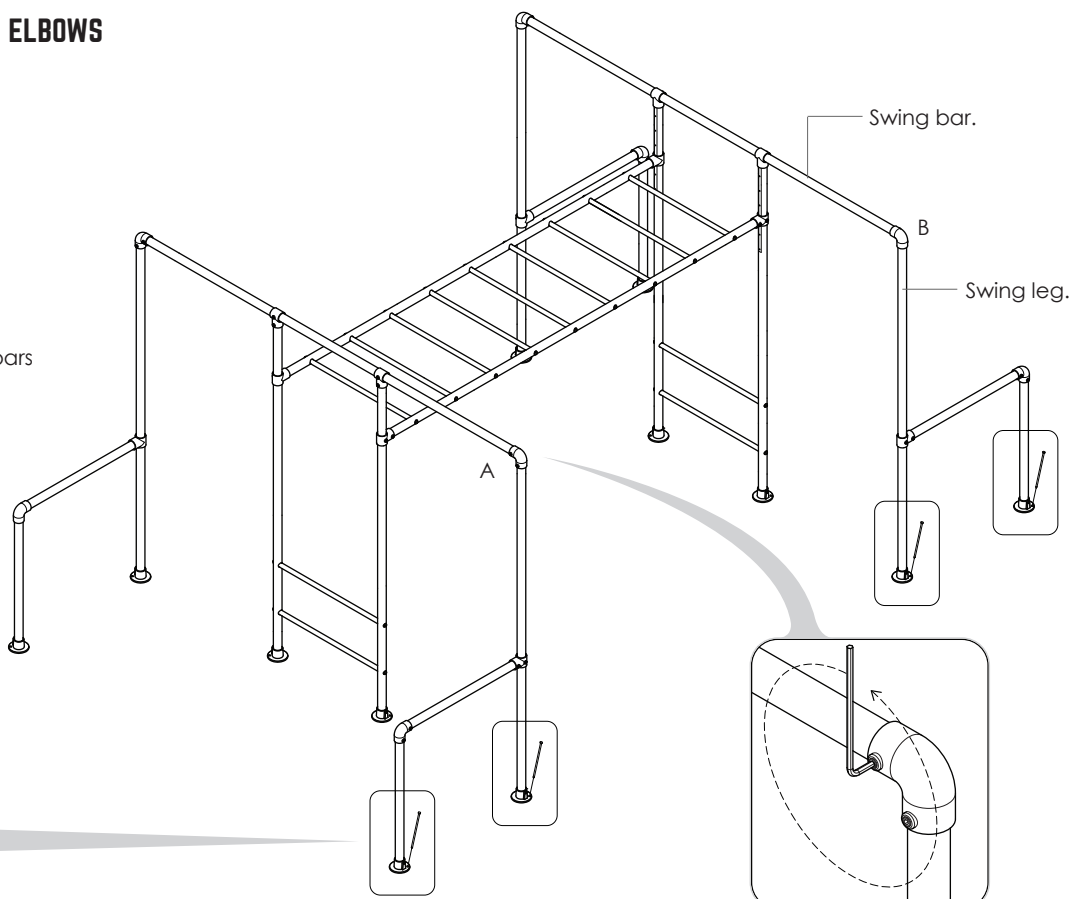


Loosen elbow grub screws.


3 LOWER LEGS TO GROUND




1. Lower legs and twirly whirlys to the ground.
2. Remove elbows from swing legs.

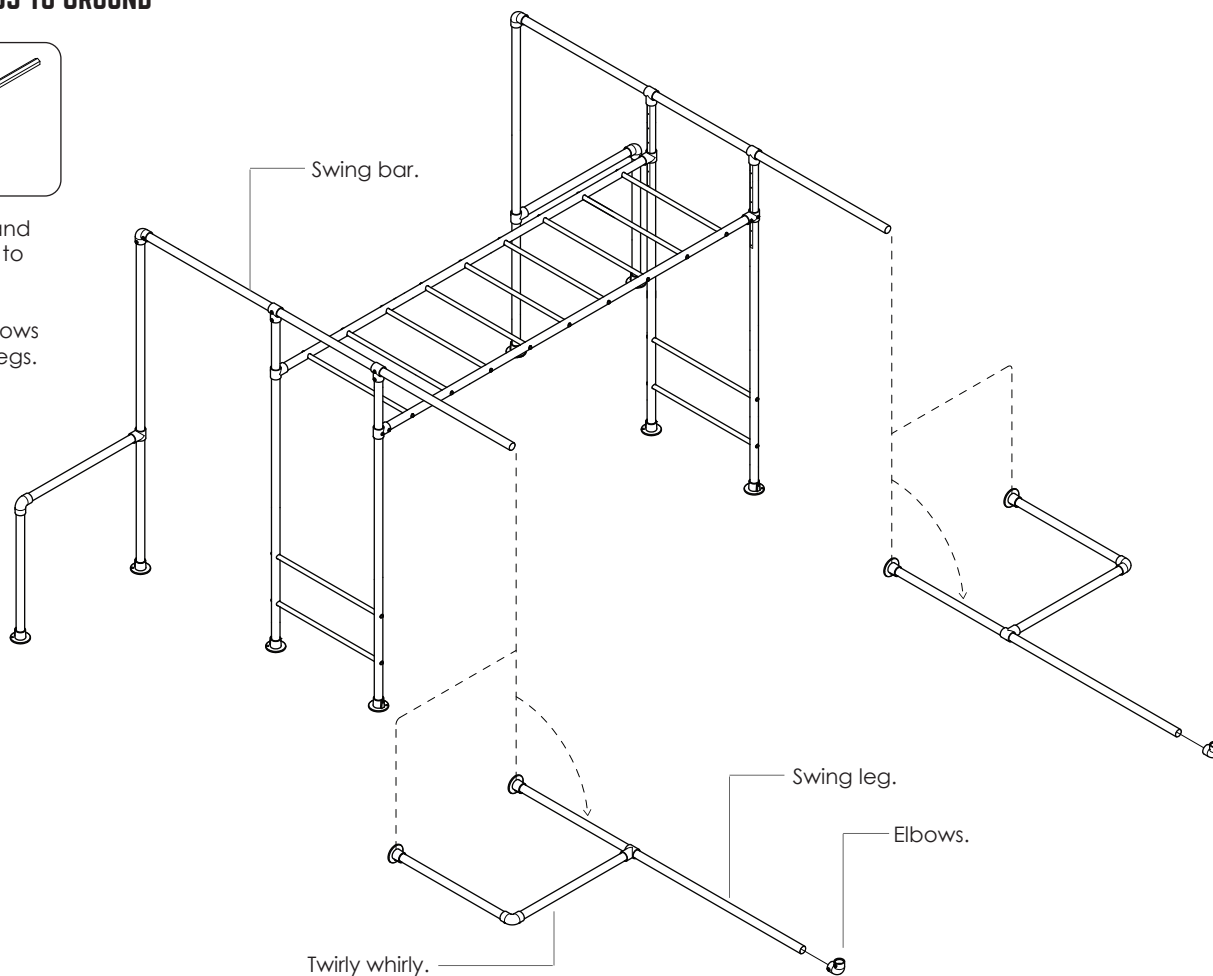


4 REMOVE SWING BARS




1. Loosen fittings connecting swing bar to legs.
2. Remove swing bars from frame.

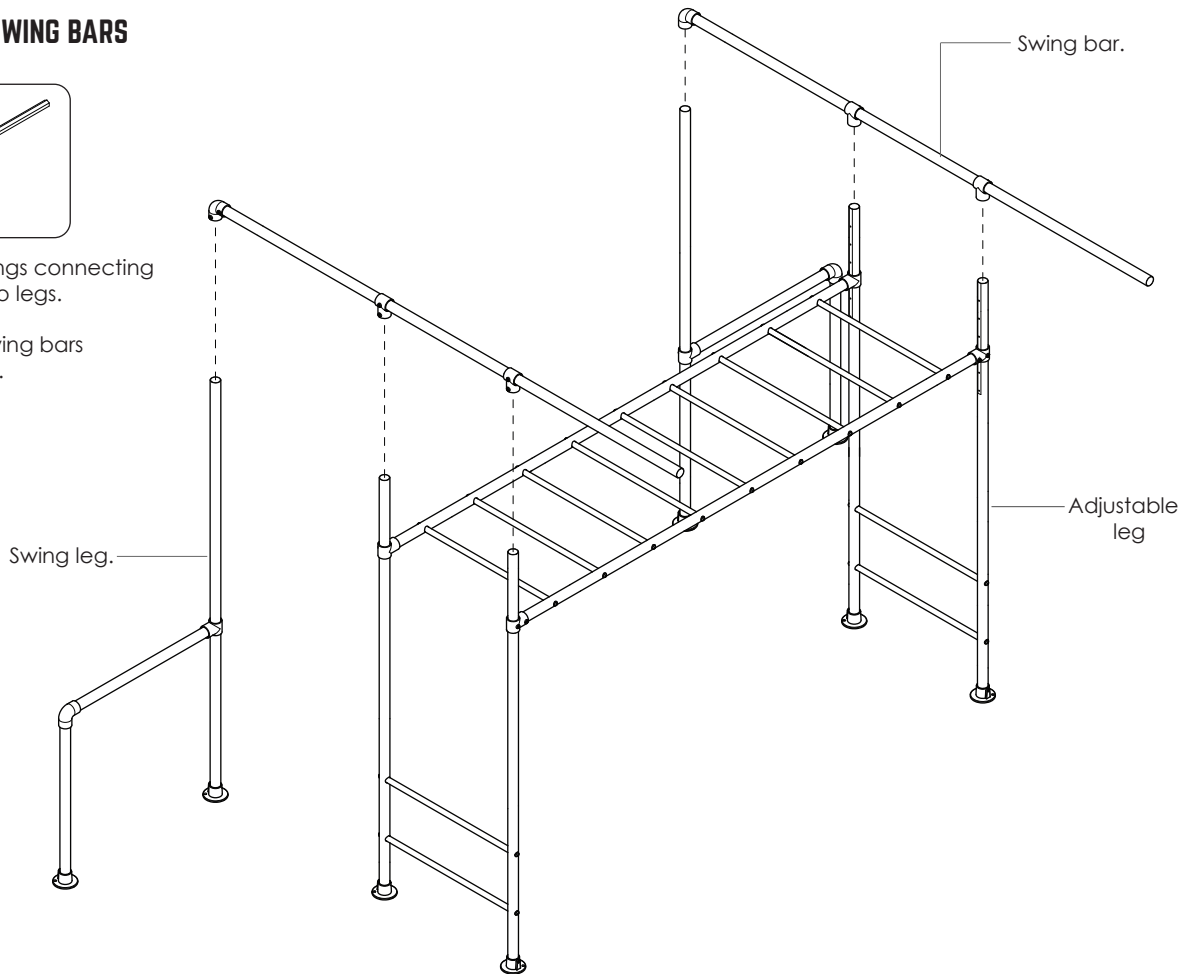

5 ATTACH FITTINGS




1. On flat level ground slide 3 reducing tees onto the accessories bar, then attach a long short tee to each end.
2. Ensure the long short tees are correctly fitted as per detail.
3. Fully tighten grub screws on long short tees and leave loose on reducing tees.

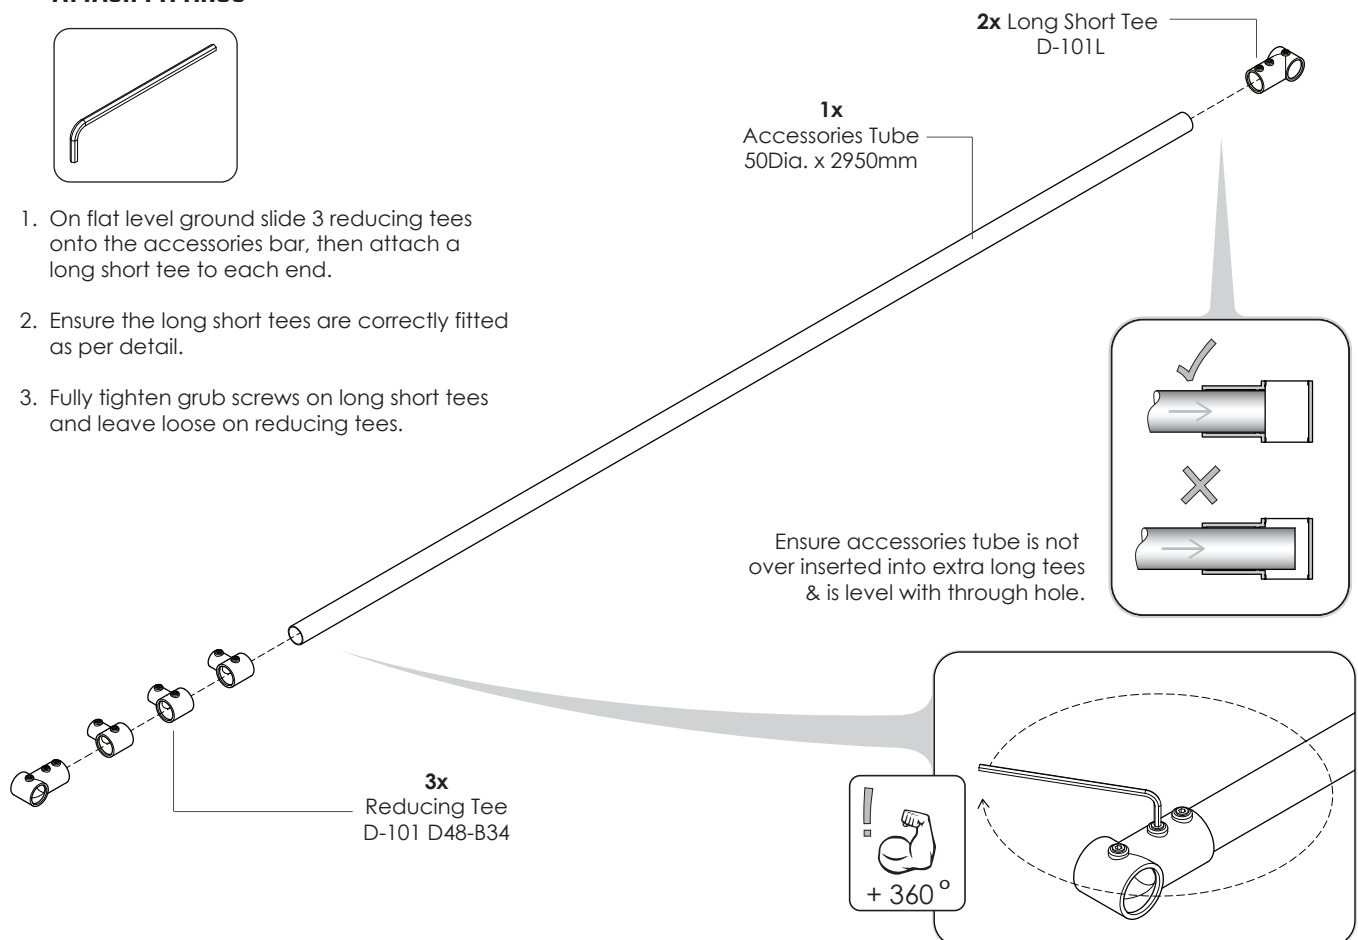


ASSEMBLY INSTRUCTIONS - LACHE BAR ASSEMBLY

6 ATTACH LACHE TUBES





1. Space reducing tees as shown. (User preference).


2. Attach 3x lache bars and fully tighten fixings 'A' but leave fixings 'B' loose for later adjustment.

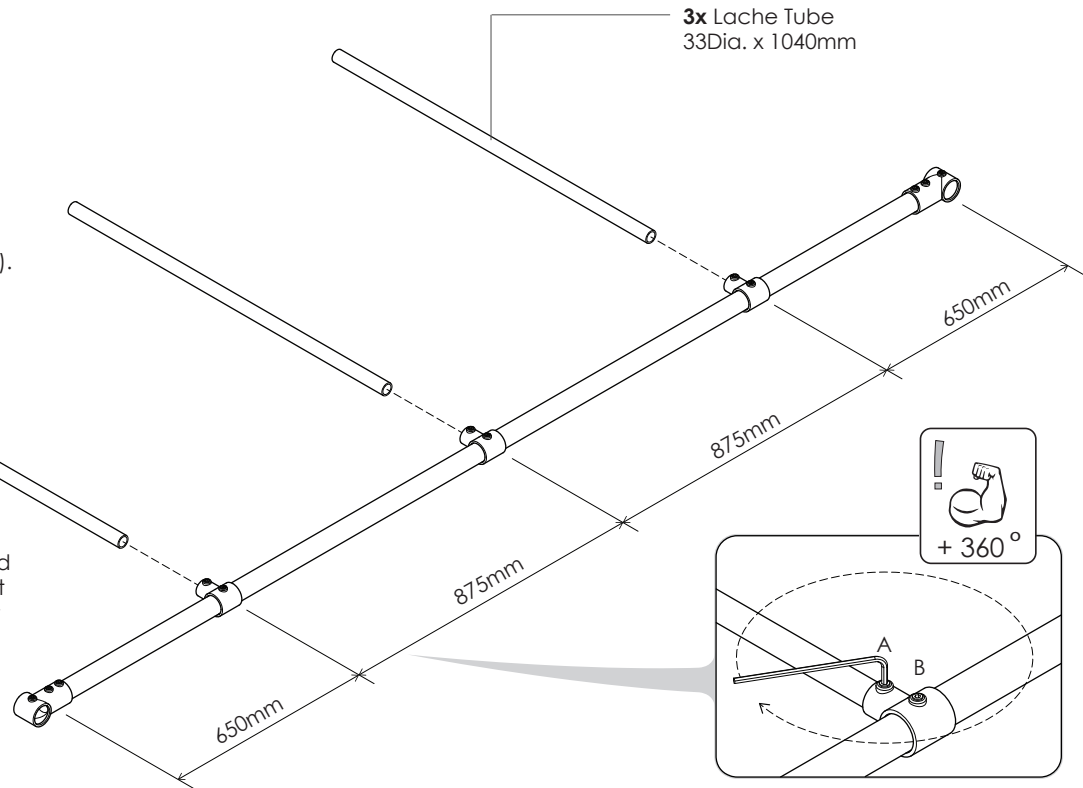




7 ATTACH LACHE BAR ASSEMBLY






1. With 2 people rotate the assembly and slide onto adjustable legs to a desired height 'X'.
2. Check that it is square and level.
3. Ensure that the grub screws on the reducing tees will be facing downwards when lifted into position.
3. Fully tighten long short tee grub screws. Leave reducing tees loose.

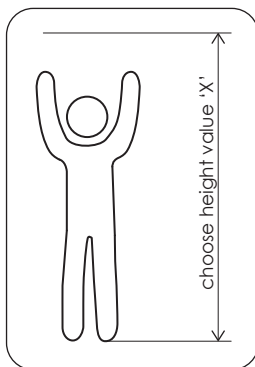



Depending on skills and user height, select a suitable lache bars height.

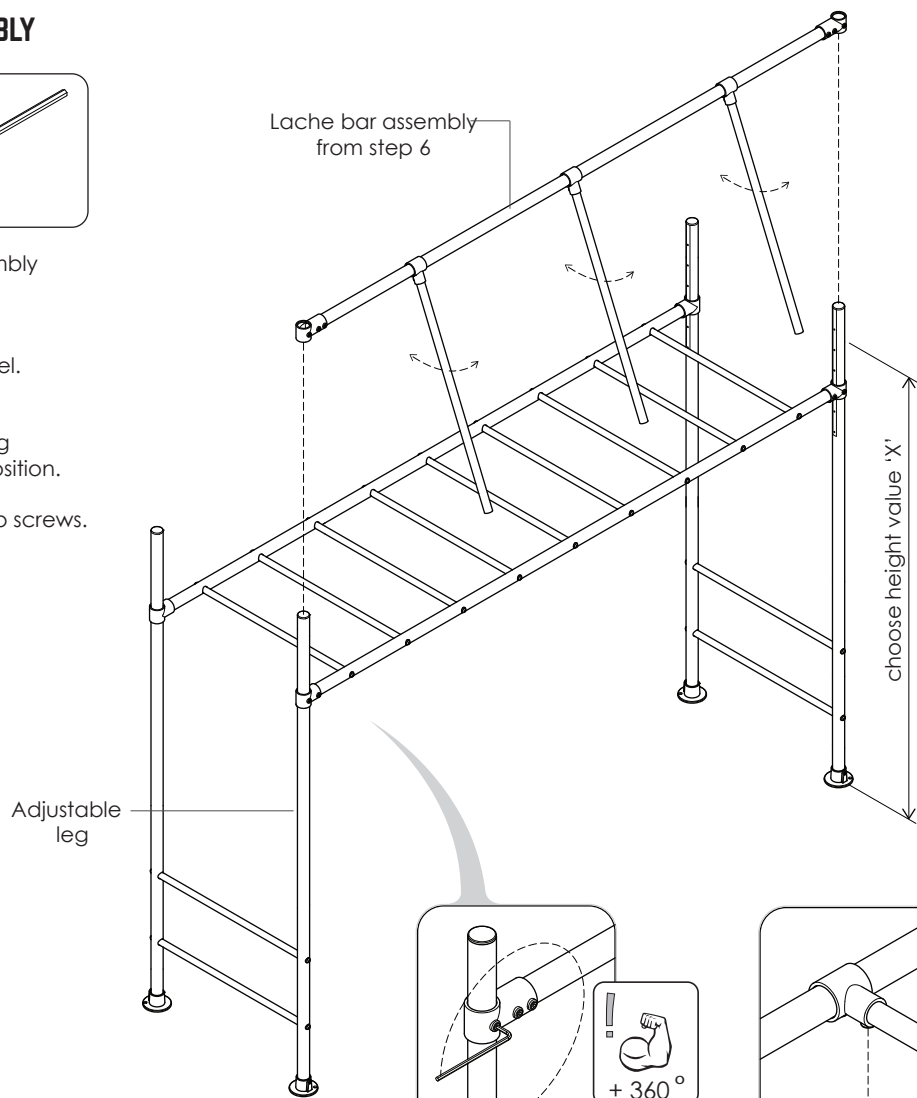

8 RE-ATTACH 2X SWING BAR ASSEMBLIES.




Re-attach the short tees and elbows on the swing bars removed in step 2, to the main monkey bar adjustable legs. Check the swing bars are level and square. Fully tighten all grub screws.

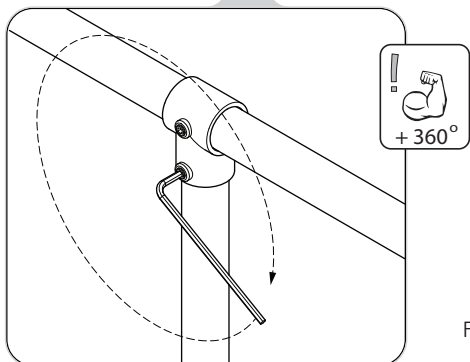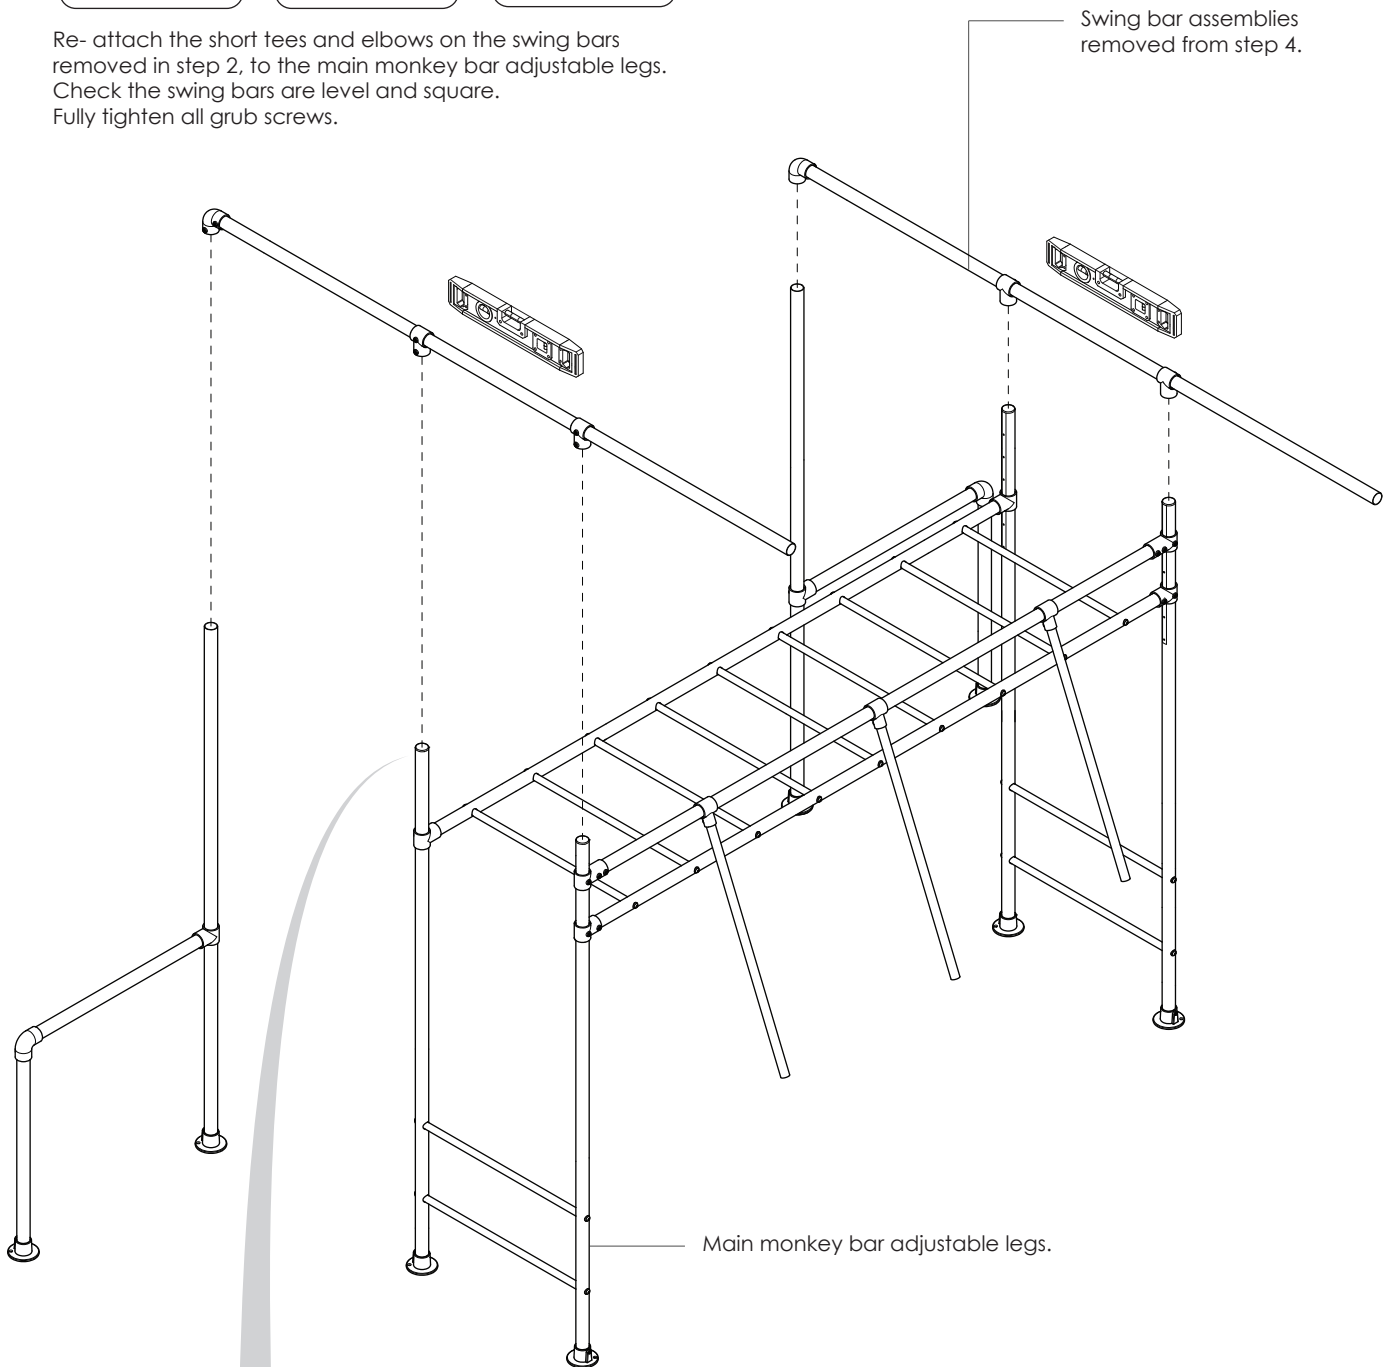

Fully tighten all grub screws on all short tees.



ASSEMBLY INSTRUCTIONS - SWING LEG ASSEMBLY

9 ASSEMBLE LEGS & ACCESSORIES BAR.




1. On flat level ground slide 3x reducing tees onto accessories tube, spacing the same as the other lache accessories tube in step 6. Ensure the grub screws are facing the base plates on the legs.
2. Position long short tee 'A and B' at selected height 'X' from step 7.
2. Fit accessories bar into long short tees, replace elbows removed in step 3, then fully tighten all grub screws.


Leg Base Plates.

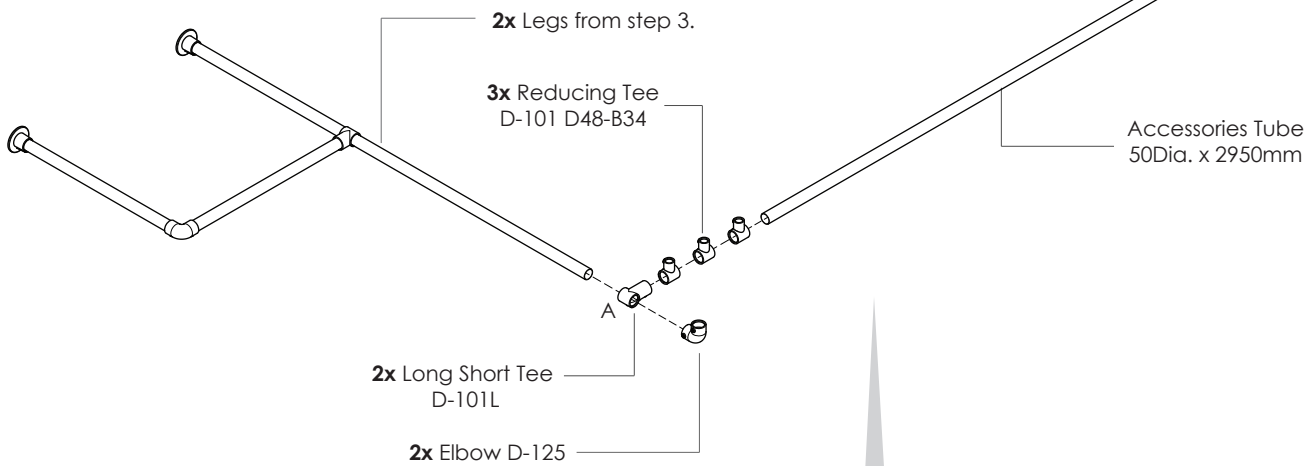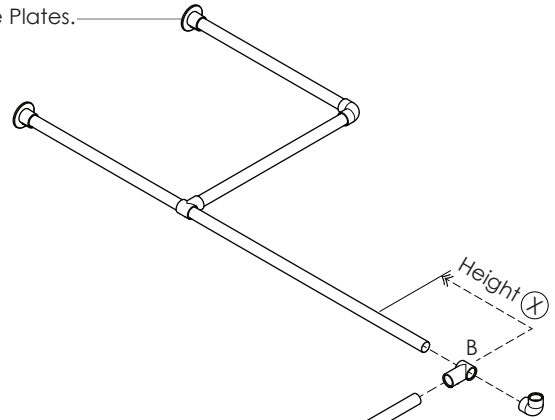



ASSEMBLED LEGS & ACCESSORIES BAR.

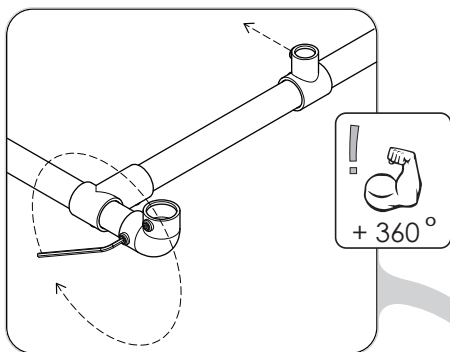



Fully tighten grub screws.
Reducing tee grub screws facing base plates.

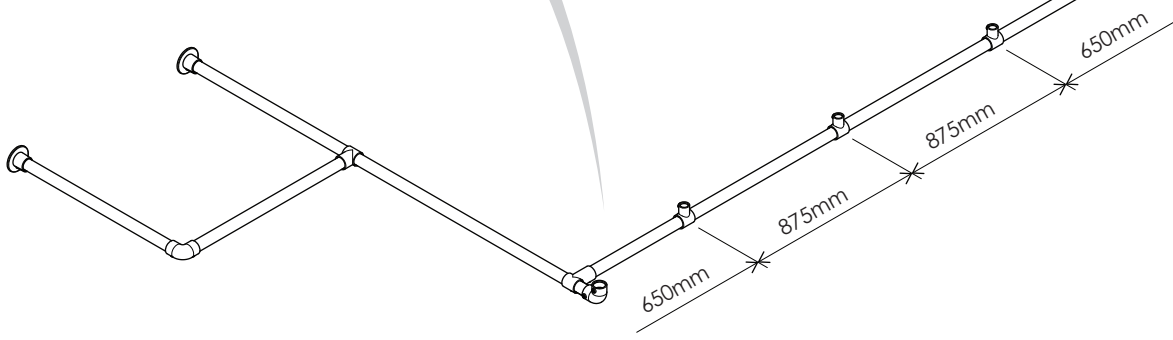


10 ATTACH SWING LEG ASSEMBLY



1. With 2 people slide leg assembly onto swing bar ends (lache tube side).
2. At the same time swivel the lache tubes into position in the leg assembly reducing tees.
3. Fully tighten all grub screws.

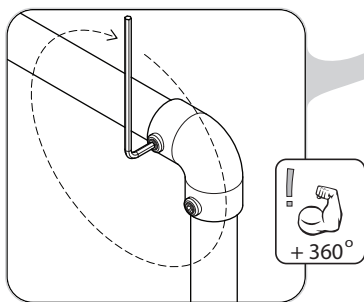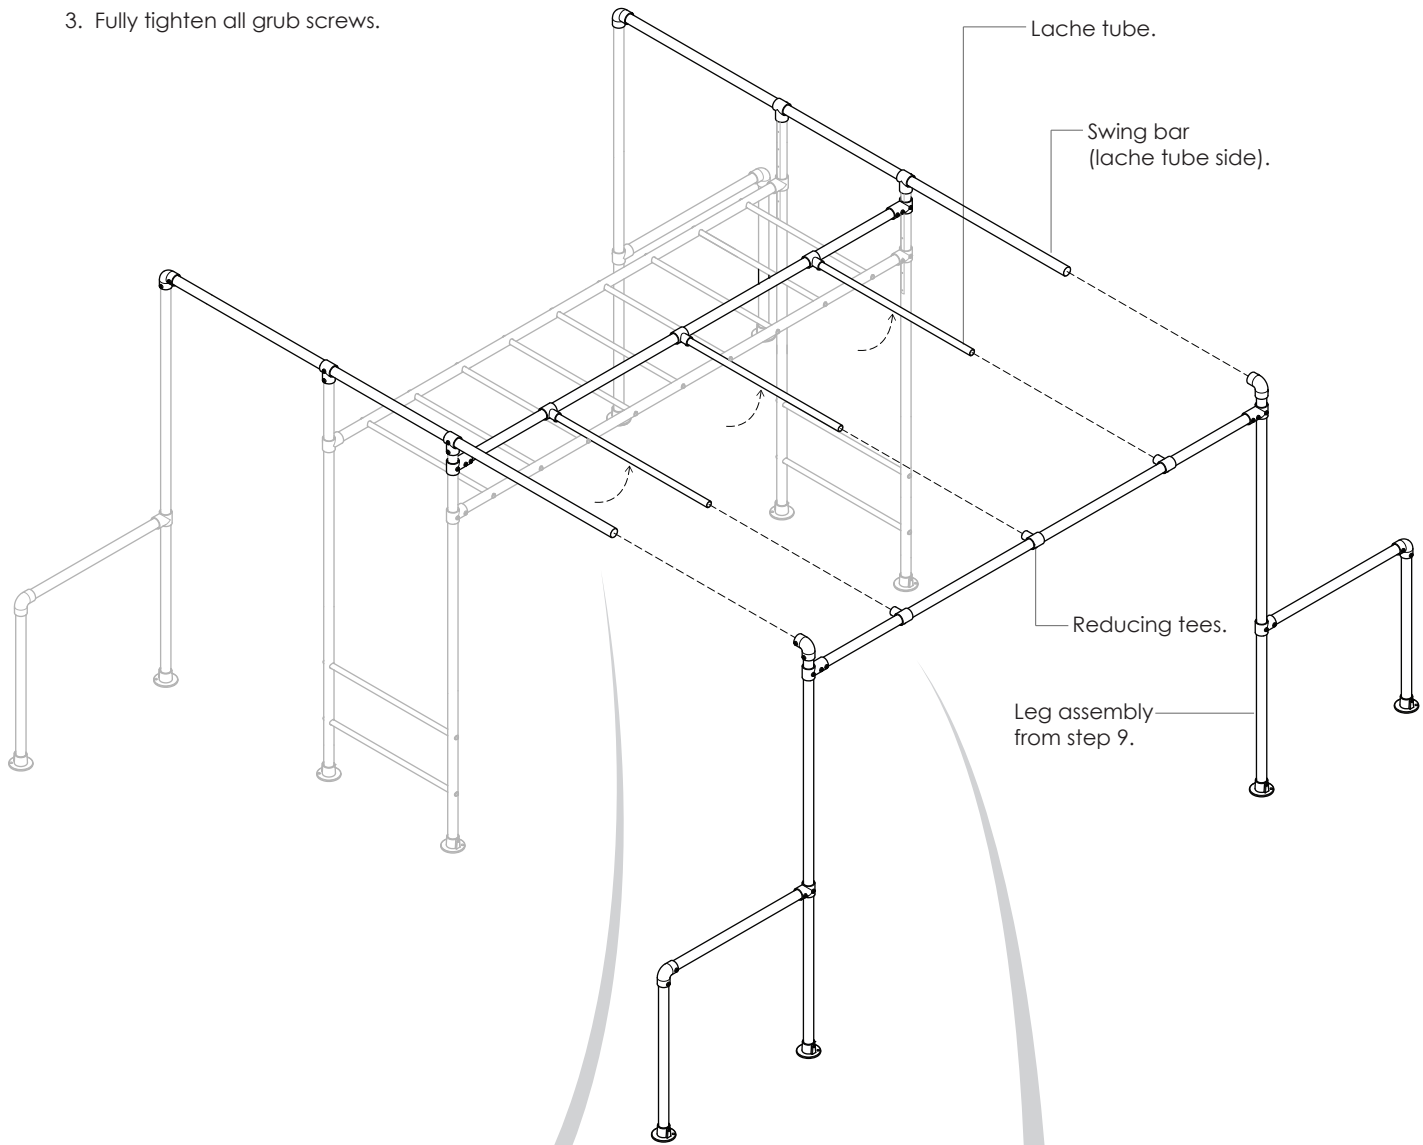



Fully tighten all grub screws.

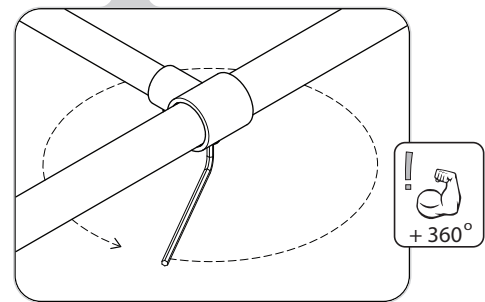



Fully tighten all grub screws.

11

SECURE TO GROUND





1. Check frame is level and square.
2. Ensure all grub screws are firmly tightened.
3. Hammer in pegs x4.

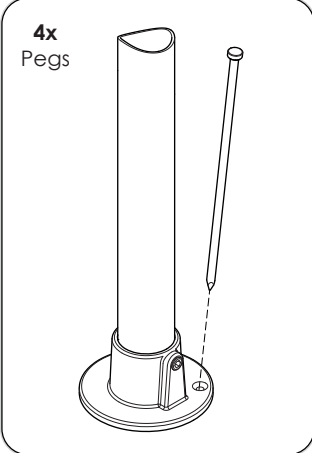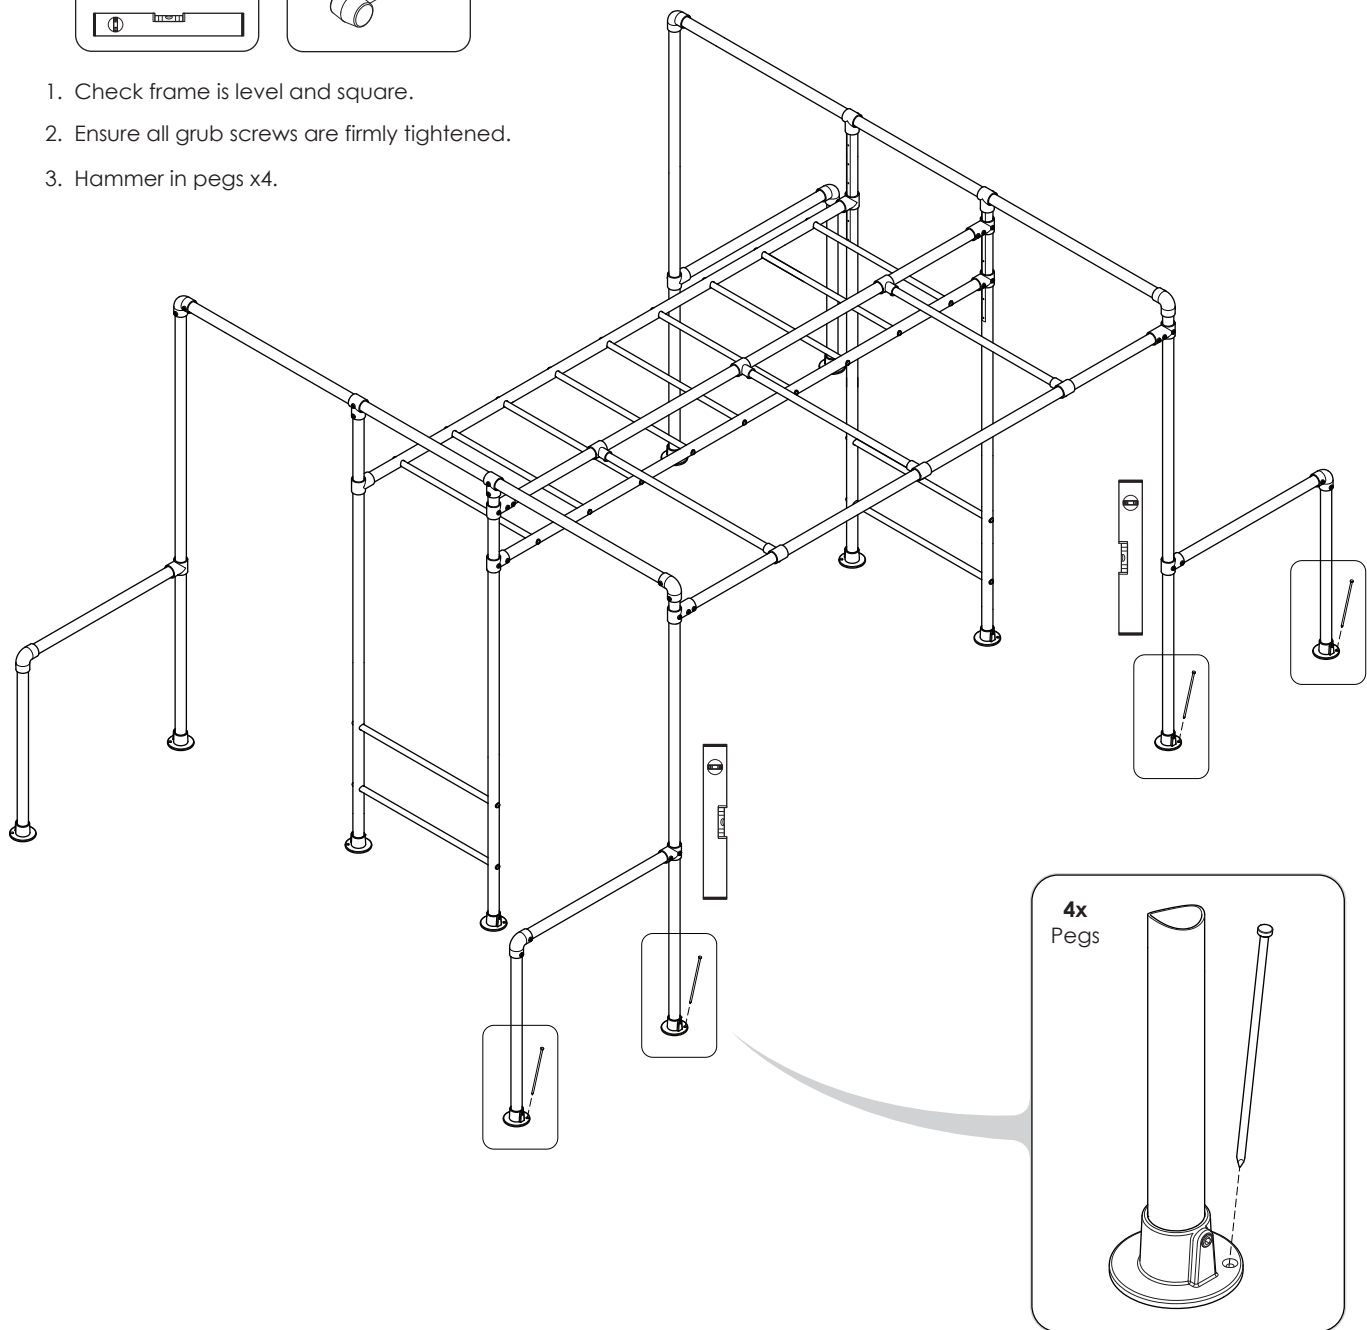

12

FINAL CHECKS




1. Ensure frame is square and level.
2. Firmly tighten all grub screws and bolts.
3. All base plates are pegged down.
4. Pre-load twirly whirlys if there is movement in your frame- refer to frame assembly instructions or to video section of website <http://www.funkymonkeybars.com/pages/videos>.
5. Read maintenance section on page 18 of this booklet

SECTION 2


THE FOLLOWING ASSEMBLY INSTRUCTIONS ARE FOR THE ROCKET RINGS.
FOR LACHE BARS ASSEMBLY INSTRUCTIONS PLEASE REFER TO SECTION 1 (PAGE 5)

1 SELECT DESIRED LOCATION OF ROCKET RINGS

(Assembly for Gorilla shown in example)




1. Choose the location for the rocket rings to be installed.
2. Check the frame is level and square. If not loosen fittings, remove pegs and adjust. Re-peg, re-tighten.

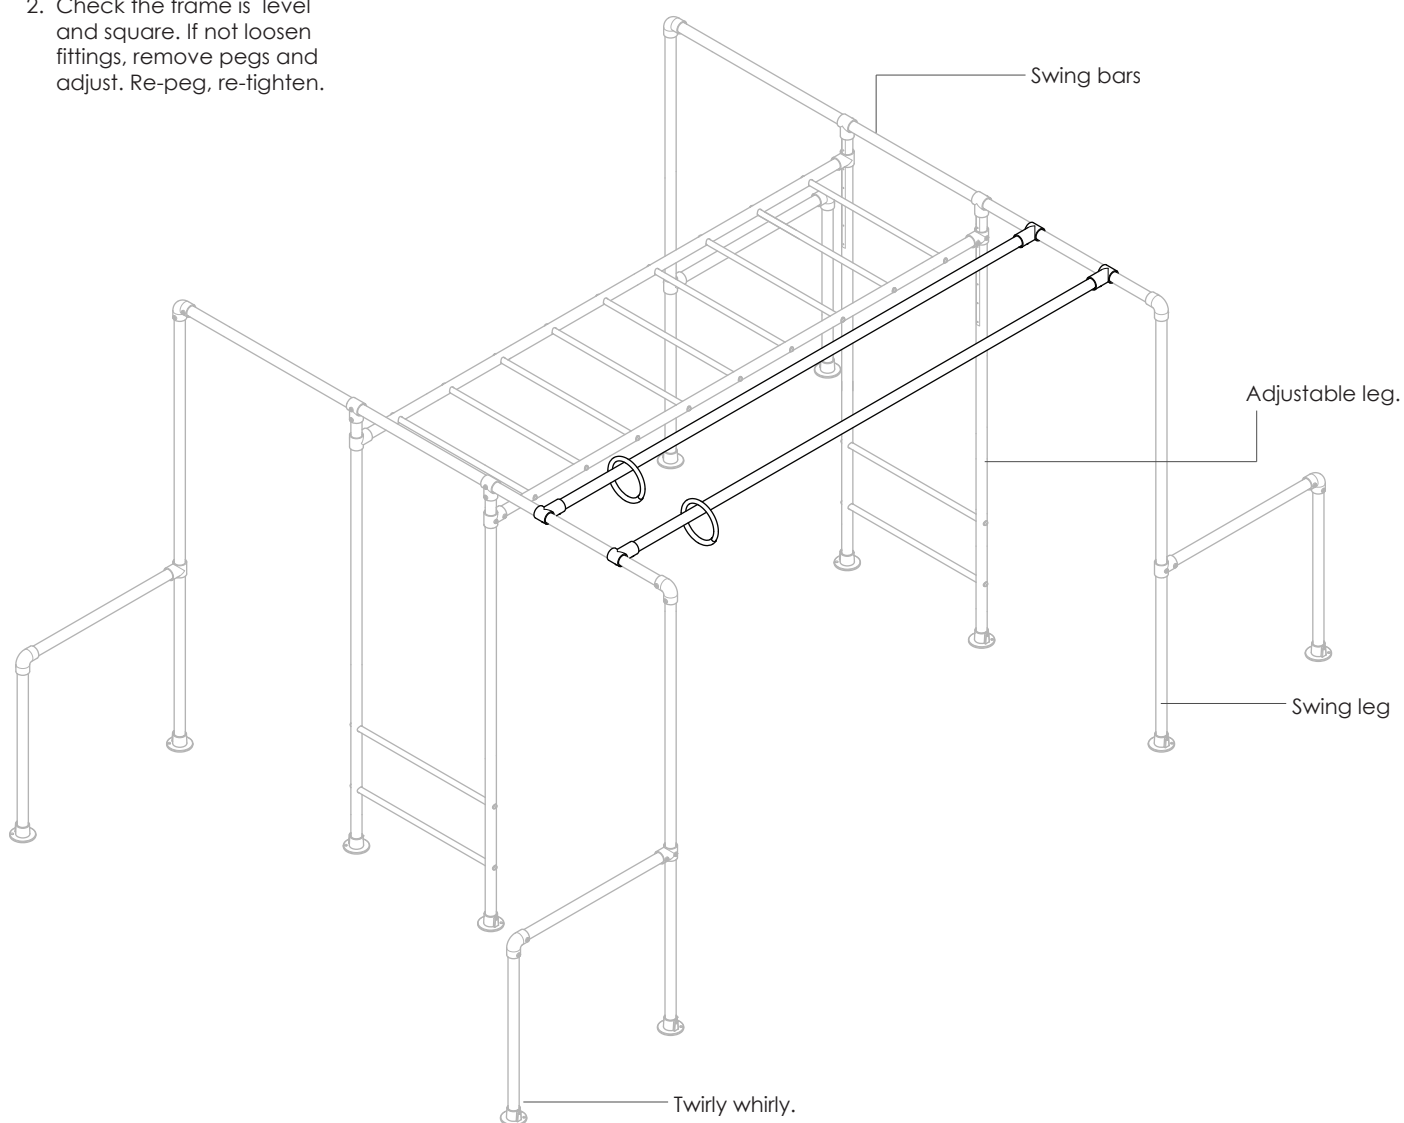


ASSEMBLY INSTRUCTIONS - FRAME PREPARATION


2 REMOVE PEGS & LOOSEN ELBOWS




1. On the selected install side remove base plate pegs.
2. Loosen top grub screws on elbows connecting swing bars to swing legs on the install side (A and B).




Remove pegs x4.

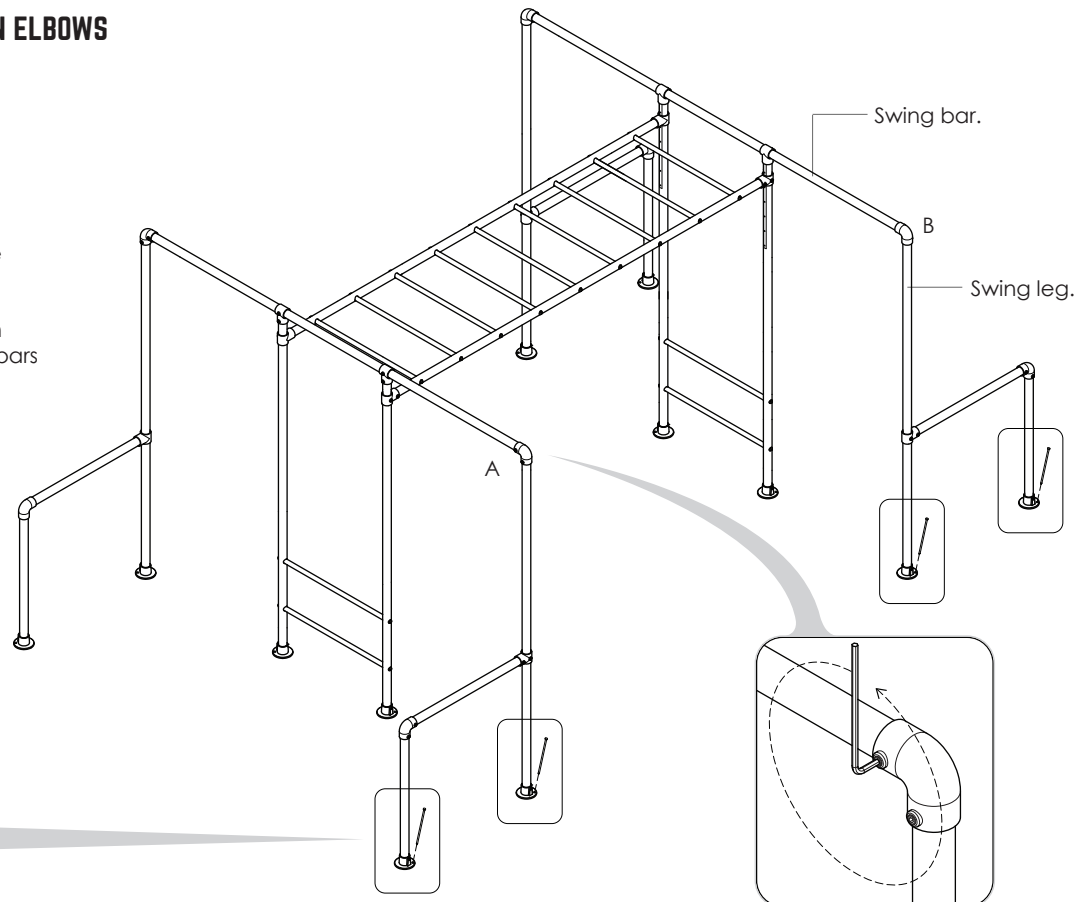

3 LOWER LEGS TO GROUND




Lower legs and twirly whirls to the ground.

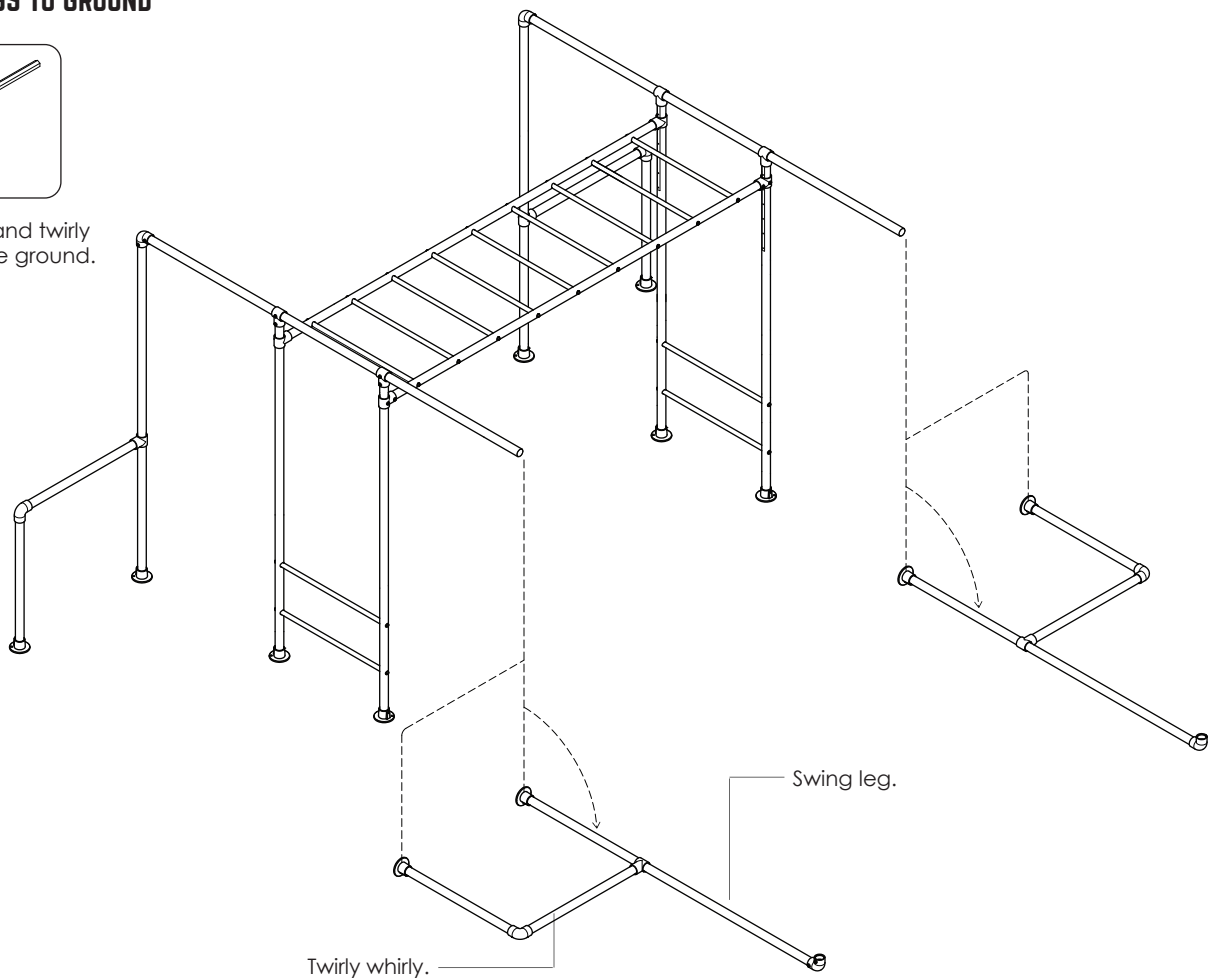

ASSEMBLY INSTRUCTIONS - ACCESSORIES BAR ASSEMBLY

4 ASSEMBLE ACCESSORIES BARS X2



1. On flat level ground slide on 4 long short tees. Fit rocket rings onto bar.
2. Correctly fit the long short tees as shown then firmly tighten all grub screws.

2x Long Short Tee D-101L

2x Accessories Tube 50Dia. x 2950mm


2x Rocket Rings

2x Long Short Tee D-101L


1

2


Ensure accessories tube is not over inserted into extra long tees & is level with through hole.




5 ATTACH ACCESSORIES BARS



1. Flip assembled accessories bars over 180° so that long short tee grub screws are facing downwards.
2. With 2 people carefully slide the accessories bars onto the swing bars. Centrally locate and separate by approximately 350-500mm. (user preference)
3. Check it is square and level then tighten all grub screws.

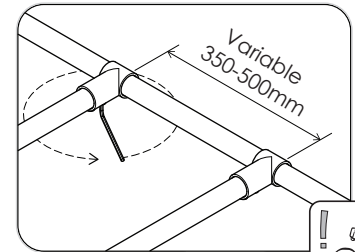


+ 360°

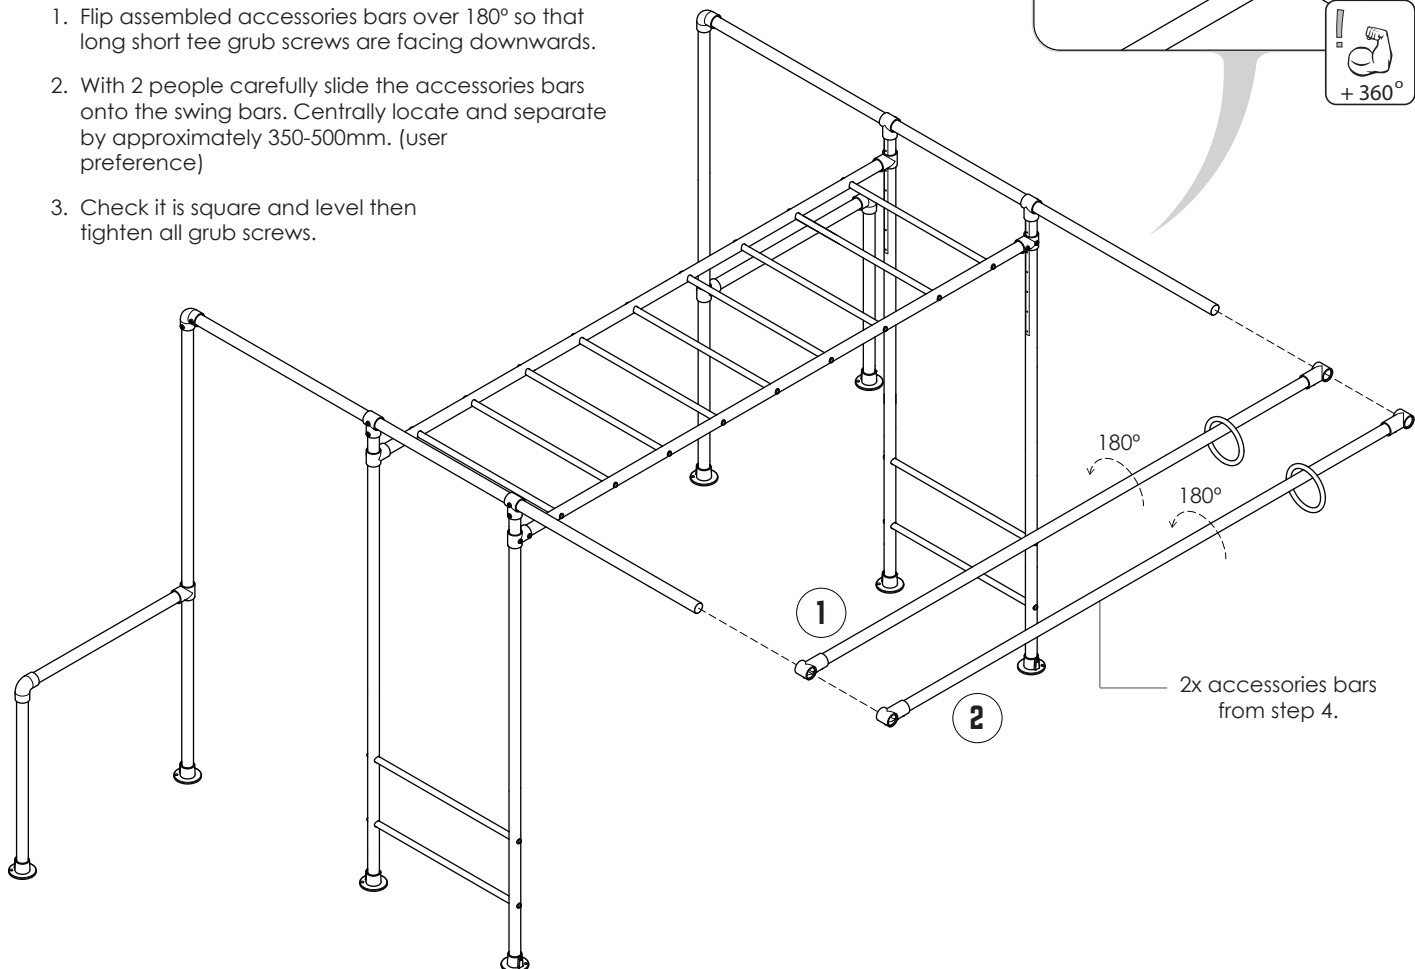



180°
180°

2x accessories bars from step 4.

7 RE-ATTACH SWING BAR LEGS




1. Lift legs and twirly whirly bars back into position.
2. Fully tighten grub screws on swing leg elbows.

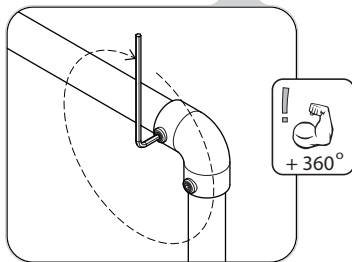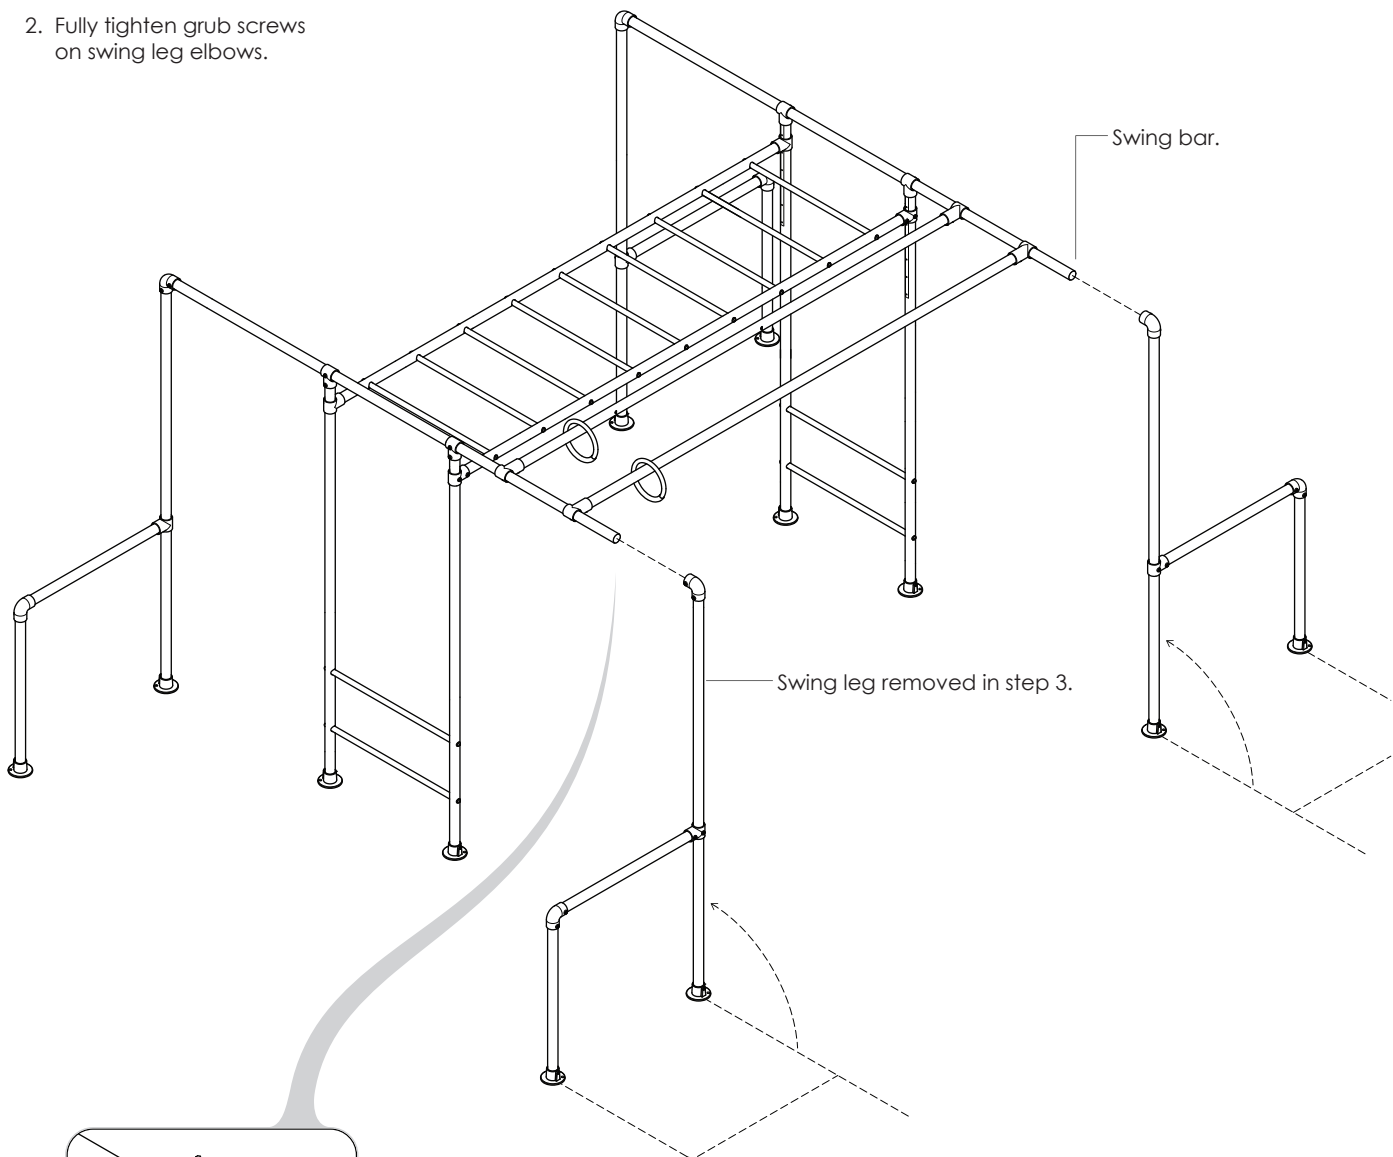


Fully tighten all elbow grub screws.

8 SECURE TO GROUND

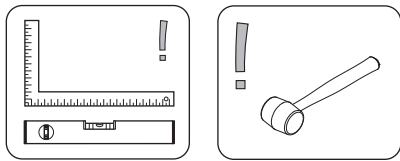

1. Check frame is level and square.
2. Ensure all grub screws are firmly tightened.
3. Hammer in pegs x4.


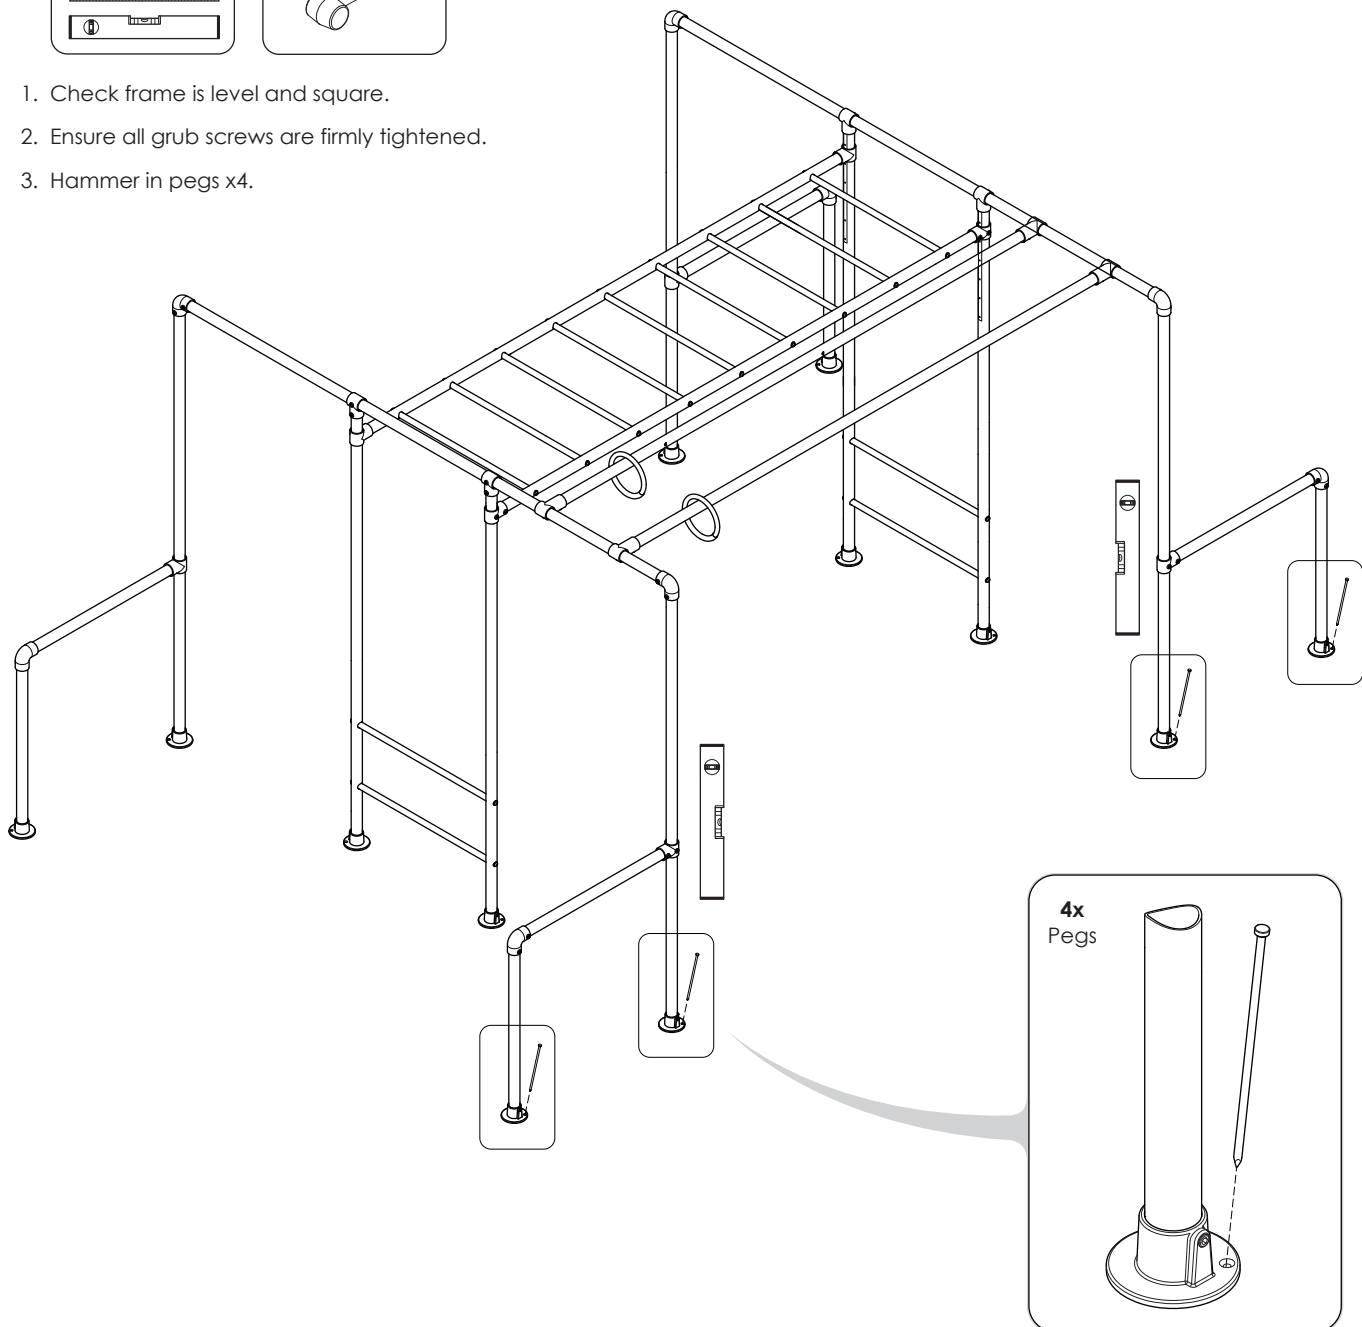


9 FINAL CHECKS



1. Ensure frame is square and level.
2. Firmly tighten all grub screws and bolts.
3. All base plates are pegged down.
4. Pre-load twirly whirlys if there is movement in your frame- refer to frame assembly instructions or to video section of website <http://www.funkymonkeybars.com/pages/videos>.
5. Read maintenance section on page 18 of this booklet

10 MAINTENANCE.



At the beginning of each heavy play session (especially a party) and twice a month during play season ensure;

1. Tighten all hardware - grub screws, nuts and bolts.
2. Pegs are in place and fully secure.
3. Lubricate all metallic moving parts with WD40 or Vaseline - (trolley and swing hooks.)
4. Ensure your frame is level and square.

FAILURE TO DO SO COULD RESULT IN SERIOUS INJURY OR DEATH.

**FOR MORE INFORMATION AND ASSEMBLY TIPS
PLEASE REFER TO OUR WEBSITE VIDEO INSTRUCTION SECTION AT
[HTTP://WWW.FUNKYMONKEYBARS.COM/PAGES/VIDEOS](http://www.funkymonkeybars.com/pages/videos)**

11 HAVE FUN





ABN 72 164 496 520



1300 912 198



info@funkymonkeybars.com



www.funkymonkeybars.com



9 Cutting Way,
Yangebup WA 6164



WE ARE SOCIAL MONKEYS



Australian Government
IP Australia

All Funky Monkey Bars® designs are registered and protected under IP Australian certification.