


FUNKY Monkey bars[®]

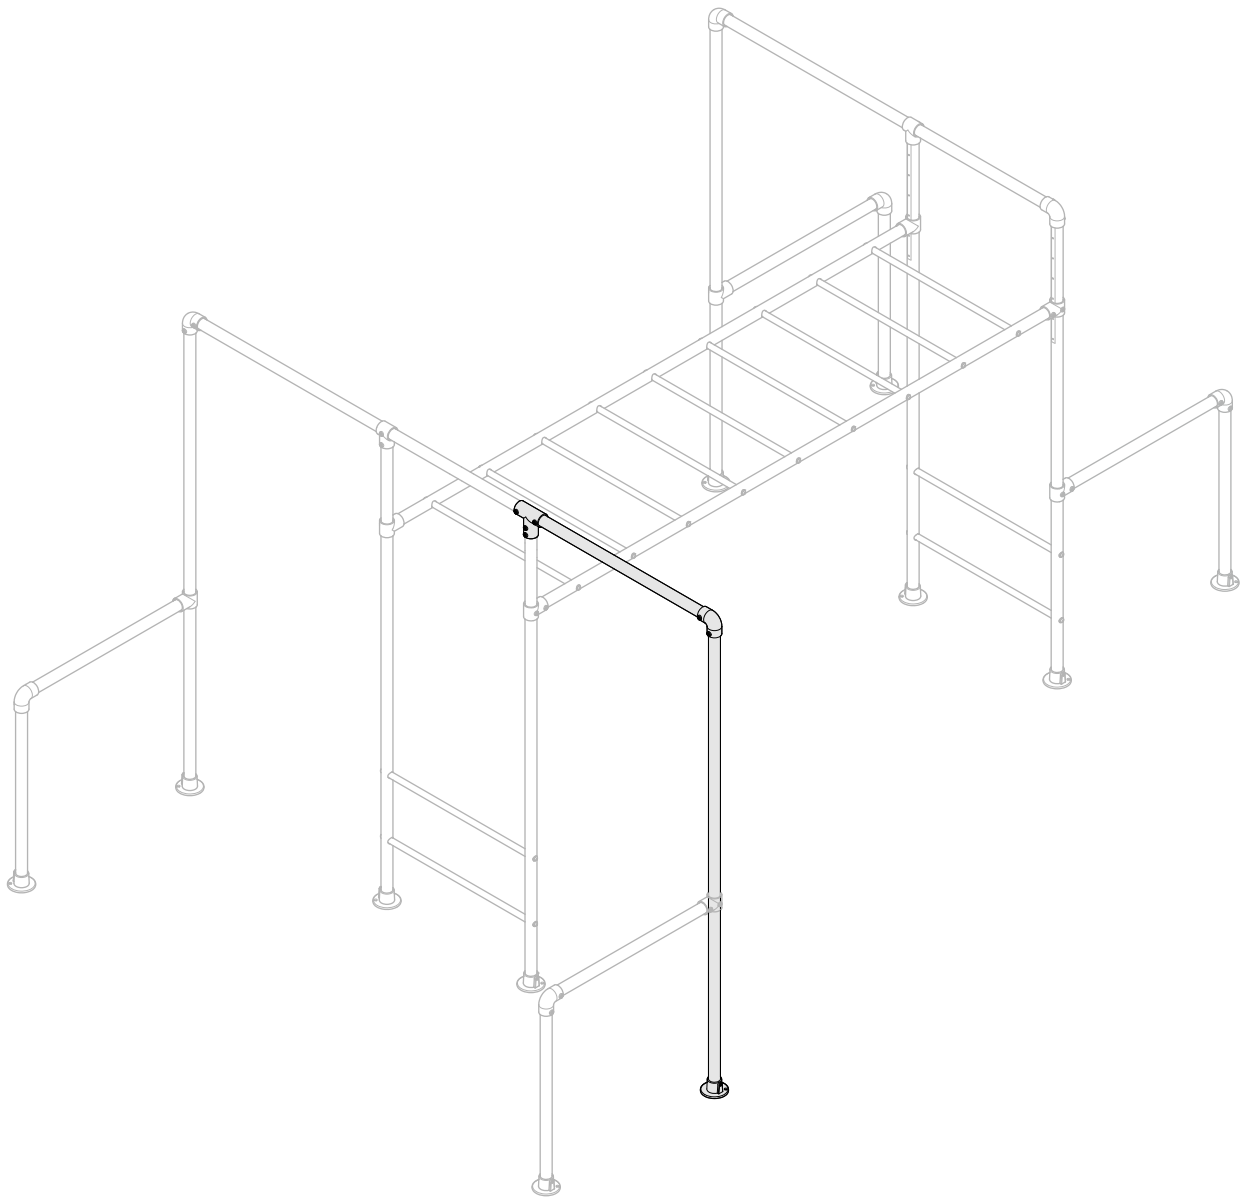

SINGLE TO DOUBLE SWING FRAME (CONVERSION ADD-ON) ASSEMBLY INSTRUCTIONS

CONTENTS

Warnings	Page 1
Assembly Tips	Page 3
Inventory and Tools	Page 4
Assembly Instructions	Page 5
Swing Bar Add-on Orientation	Page 5
Existing Frame Preparation	Page 6
Swing Bar Assembly	Page 8
Maintenance	Page 10

WARNING

PLEASE CAREFULLY READ ALL INFORMATION CONTAINED IN THIS ASSEMBLY MANUAL BEFORE YOU INSTALL AND USE YOUR FUNKY MONKEY BARS®.


SAFETY NOTICE

1. Any person handling or using the Funky Monkey Bars® products must follow the instructions as described in this document. The person in charge of assembling and using the equipment must ensure that the recommendations for use given in this document are seen by all users.
2. Only use the Funky Monkey Bars® after they have been fully assembled and after checking that the fittings are tightened properly (*refer to page 3 - Correct Tightening Method*).
3. DO NOT install your Funky Monkey Bars® over concrete, asphalt, packed earth, wood decking or any other hard surface. A fall onto a hard surface can result in serious injury or death.
4. Inspect all grub screws, bolts and nuts at the beginning of each play session to ensure your Funky Monkey Bars® are tight and secure.
5. Ensure all tubes are fully inserted into fittings until you hear the magic "CLUNK" sound.
6. Ensure your Funky Monkey Bars® are properly secure at ALL times. Pegs are in place and inserted fully into the ground.
7. DO NOT exceed the maximum load/weight limit as recommended by Funky Monkey Bars®.
8. Children should be supervised by an adult at all times.
9. Installing a gym/crash mat under the fall zone area of your Funky Monkey Bars® would be recommended for children learning this new skill. This will reduce the chance of injury and build the child's confidence while they build strength and master the skill.
10. Ensure you have thoroughly read your assembly and installation instructions and viewed our on-line installation videos at <https://www.funkymonkeybars.com/blogs/installation-maintenance-videos>
11. DO NOT climb, sit or stand on top of the monkey bar (horizontal ladder) section.
12. DO NOT jump from the top of any section of the monkey bar.
13. DO NOT use your Funky Monkey Bars® when wet as the steel will be slippery.
14. DO NOT attach items to your frame that are not designed specifically to be used with Funky Monkey Bars®, especially lower quality products that have not been approved by Funky Monkey Bars®.
15. Ensure the height of your Funky Monkey Bars® (horizontal ladder) are set at a level that is age appropriate.
16. DO NOT install your Funky Monkey Bars® over or near objects that could interfere with users in an unsafe way. Maintain a clear area around your Funky Monkey Bars®.
17. DO NOT use your Funky Monkey Bars® while under the influence of drugs and alcohol.
18. Wear clothing free of drawstrings, hooks, loops or anything that could get caught while using your Funky Monkey Bars® and result in entanglement and/or strangulation.


ASSEMBLY

1. Keep small children away from the Funky Monkey Bars® during assembly.
2. Do not attempt to use the Funky Monkey Bars® until it is completely assembled and every fitting is tight and secured.
3. Installation typically takes 1-2 hours to complete. Two people are recommended for assembly.
4. Ensure all fittings are tightened to the correct tightening method as described on page 3.
5. Assembly should be carried out on clean, dry, level surface


Please refer to the video section on the Funky Monkey Bars® website for more handy tips and assembly instructions at <http://www.funkymonkeybars.com/pages/videos>



Assembly requires 2 adults.

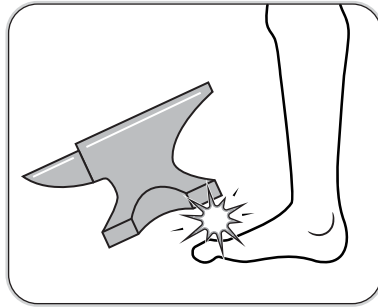

Heavy items !

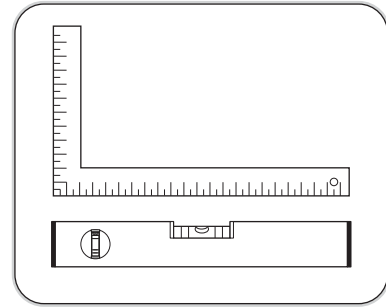

Work on flat level surface.

LOCATION

1. A safe fall zone around your Funky Monkey Bars® is essential. A minimum distance of 1.5m to 2m (5 ft to 6.5ft) is recommended around the elevated hanging points of your Funky Monkey Bars®.
2. Place your Funky Monkey Bars® on level ground, away from any structure or obstruction such as a fence, garage, house, overhanging branches, laundry lines or electrical wires and remove any obstructions beneath your Funky Monkey Bars®.
3. Ensure your Funky Monkey Bars® are positioned away from retaining walls, pool fences, structures and other play equipment. Maintain a clear space around the whole perimeter of your Funky Monkey Bars®.
4. Place your Funky Monkey Bars® on the most level surface available.

MAINTENANCE


1. At the beginning of each heavy play session we recommend the following maintenance processes be performed on your Funky Monkey Bars®:
 - Tighten all bolts, grub screws and applicable hardware (as per page 3)
 - Lubricate all metallic moving parts as per instructions (flying fox, swing hooks etc)
 - Check all protective coverings on bolts, pipes, edges and corners. Replace if they are loose, cracked or missing.
 - Check all moving parts including swing seats, shackles, snap hooks, chains and trolleys for wear, rust, or other deterioration. Replace as needed.
2. Twice a month during play season we would recommend the following maintenance processes be performed on your Funky Monkey Bars®:
 - Tighten all connections and hardware
 - Check all protective coverings on bolts, pipes, edges and corners. Replace if they are loose, cracked or missing.
3. Once a month during play season we would recommend the following maintenance processes be performed on your Funky Monkey Bars®:
 - Lubricate all metallic moving parts as per instructions (flying fox, swing hooks etc). If swings start to squeek then lubricate swing hooks.
 - Check all moving parts including swing seats, ropes, chains and trolleys for wear, rust, or other deterioration. Replace as needed.
 - Owners shall be responsible for maintaining the legibility of any warning labels.

For additional information concerning your Funky Monkey Bars®, please contact our customer service team or check our website for any important updates. Phone - 1300 912 198 or www.funkymonkeybars.com


ASSEMBLY TIPS

CORRECT INSERTION INTO FITTINGS - (INDICATIVE DIAGRAM SHOWN)

All tubes must be fully inserted until contact is made with adjoining tube.

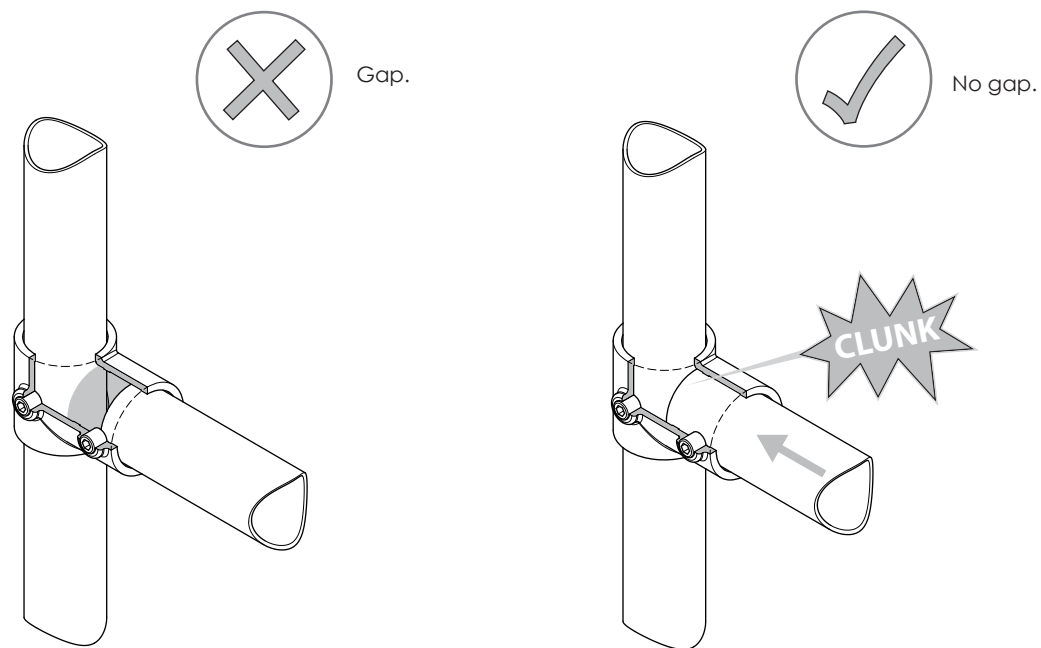


CORRECT TIGHTENING METHOD OF GRUB SCREWS - (INDICATIVE DIAGRAM SHOWN)

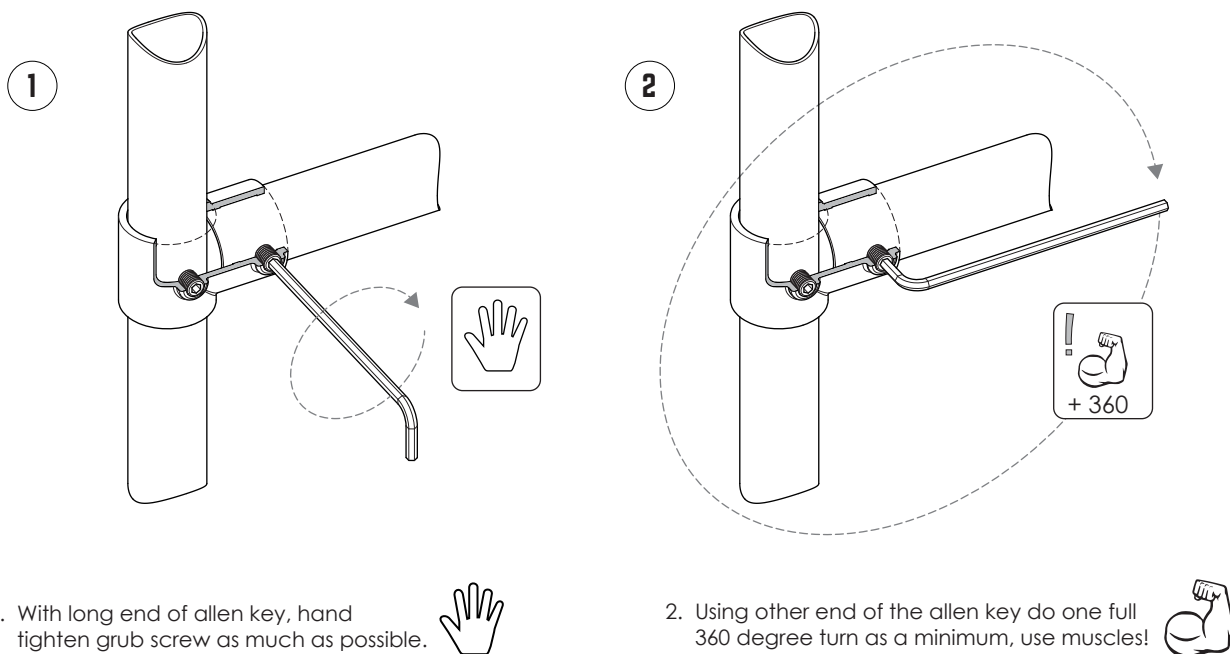


INVENTORY


TOOLS REQUIRED FOR INSTALLATION




1x
8mm Allen key
(Included)

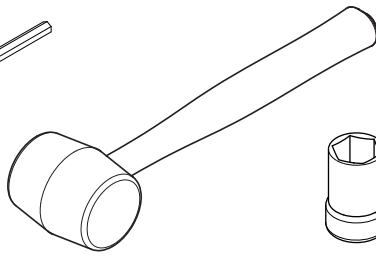


1x
Soft Hammer
(Not included)



1x
17mm Ratchet
(Not included)
If fitting swing hooks.




1x
Spirit Level
(Not included)




1x
Tape Measure
(Not included)

TUBES


1x
1040 Swing Tube




1x
Swing Leg Tube




FITTINGS

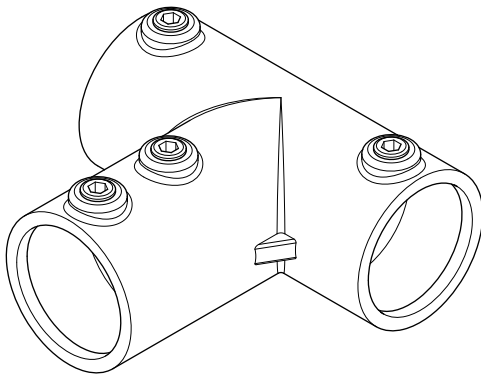

1x
Extra Long Tee
D-104L

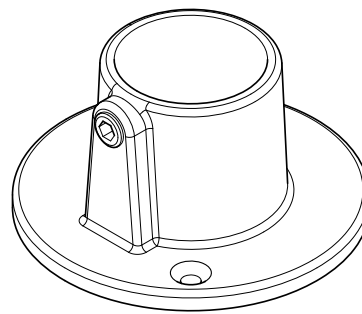

1x
Base Plate
D-131




1x
Peg

ASSEMBLY INSTRUCTIONS - ORIENTATION

1 SELECT DESIRED ORIENTATION OF SWING BAR ADD ON

(Assembly for orangutan shown in example)

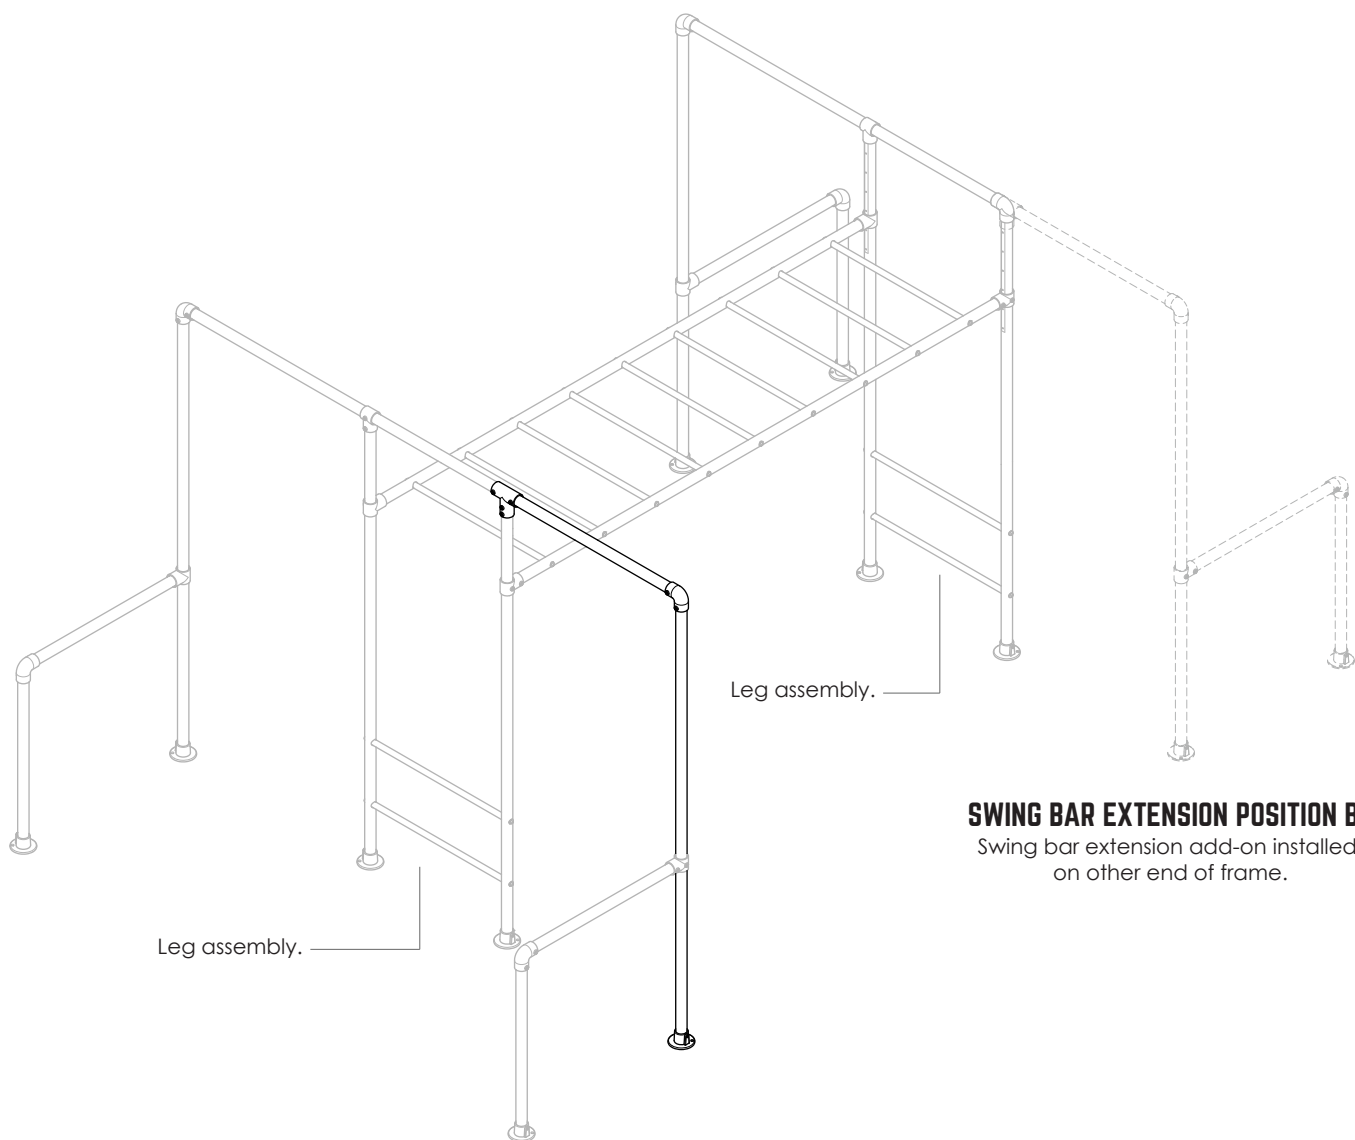

SWING BAR EXTENSION POSITION B.

Swing bar extension add-on installed on other end of frame.

SWING BAR EXTENSION POSITION A.


Swing bar extension add-on installed onto the side of frame leg assembly.

NOTE:

For the following assembly instructions, swing bar extension position A will be used as the example. Position B uses the same procedure. The swing bar extension add-on should only be added to the leg assembly side of any frame.



ASSEMBLY INSTRUCTIONS - FRAME PREPARATION

2 REMOVE PEG & LOOSEN FITTINGS



Remove peg from existing twirly whirly base plate on selected swing bar extension side. Loosen lower grub screws on fittings marked 1 and all grub screws marked 2.


Remove peg.

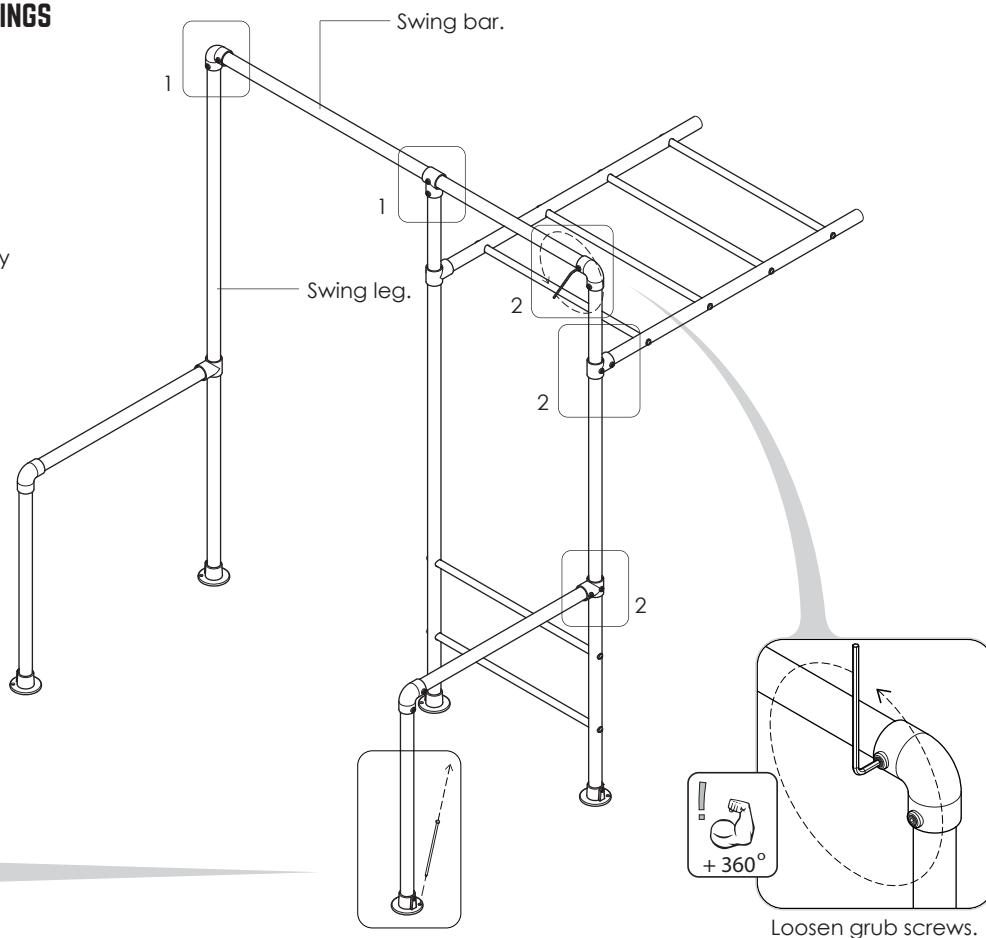


3 REMOVE ELBOW AND TWIRLY WHIRLY




1. Lift swing bar up and remove elbow- (required later).
2. Remove twirly whirly bar from leg assembly.

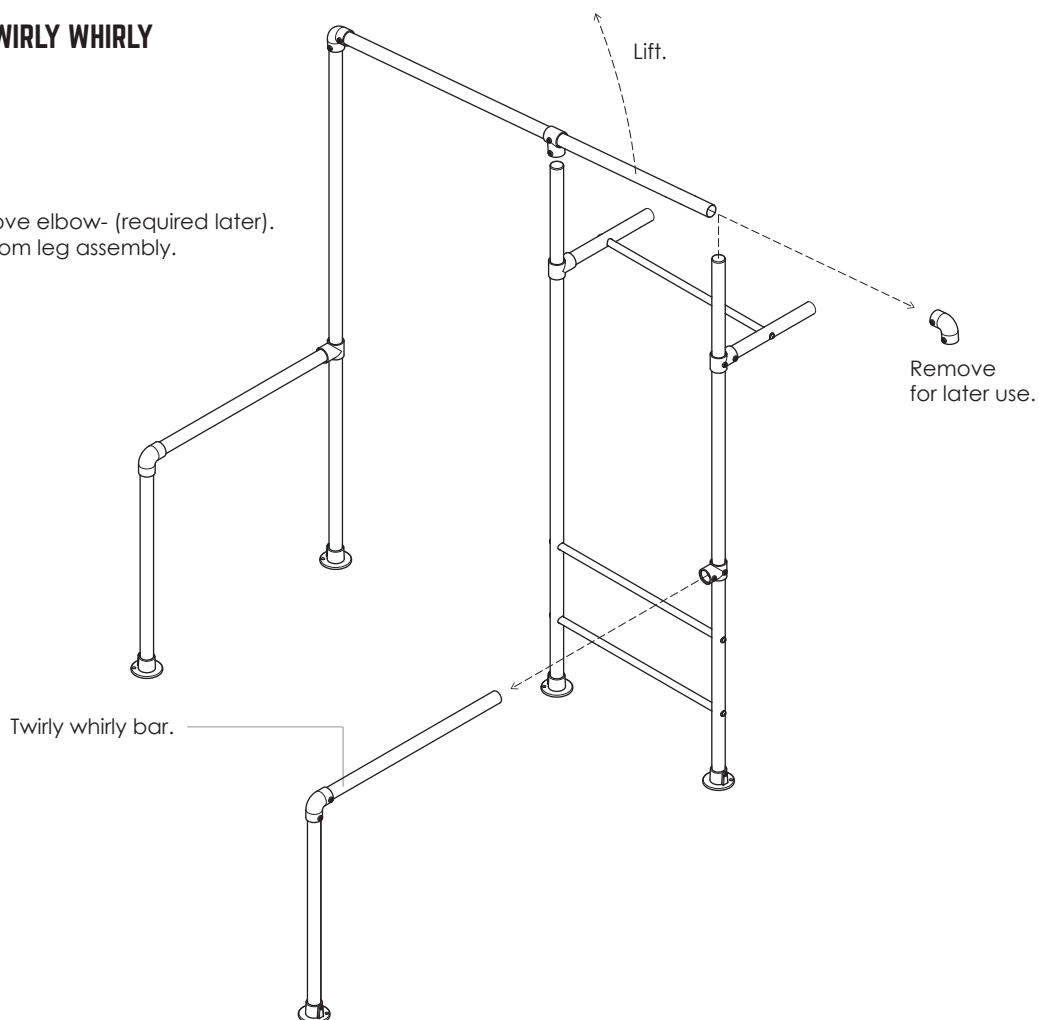


4 REMOVE 1x SHORT TEE




1. Pull leg away from monkey bar ladder and remove short tee. Place aside for later assembly. (This will be reused when reinstalling the twirly whirly on the swing leg, step 6)
2. Slide short tee from twirly whirly up to replace removed short tee from monkey bar ladder.
3. Fully tighten grub screws on relocated short tee.

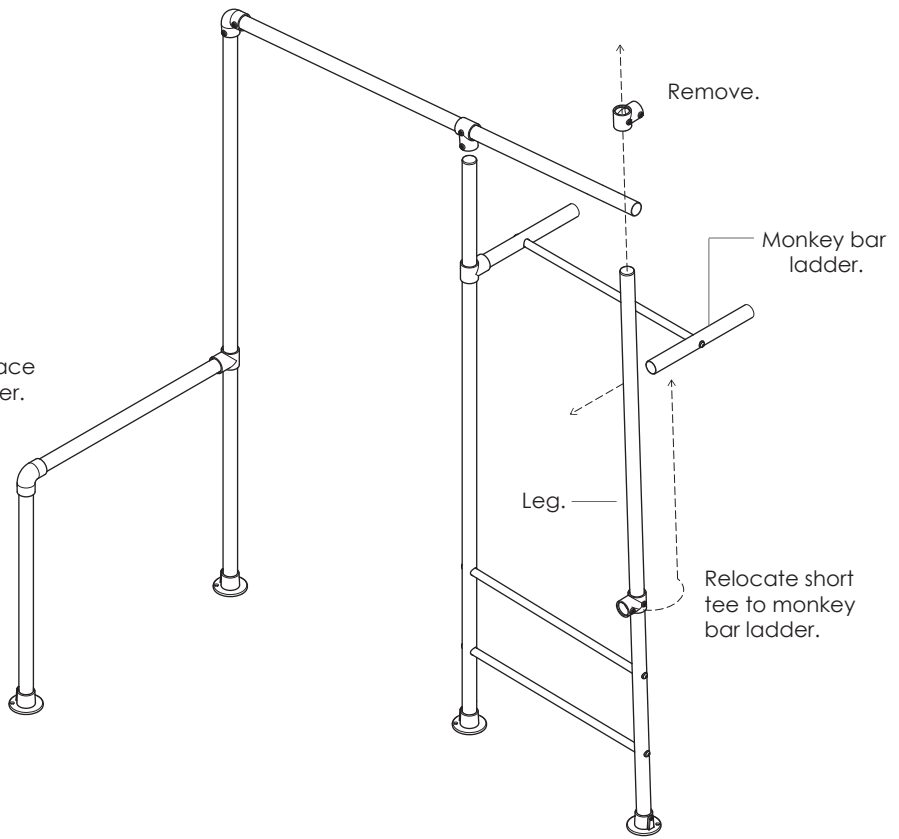

5 ATTACH LONG TEE




1. Replace removed elbow with 1x extra long tee.
2. Reattach swing bar to all legs and fully tighten all grub screws.
3. Fully tighten grub screws on relocated short tee.

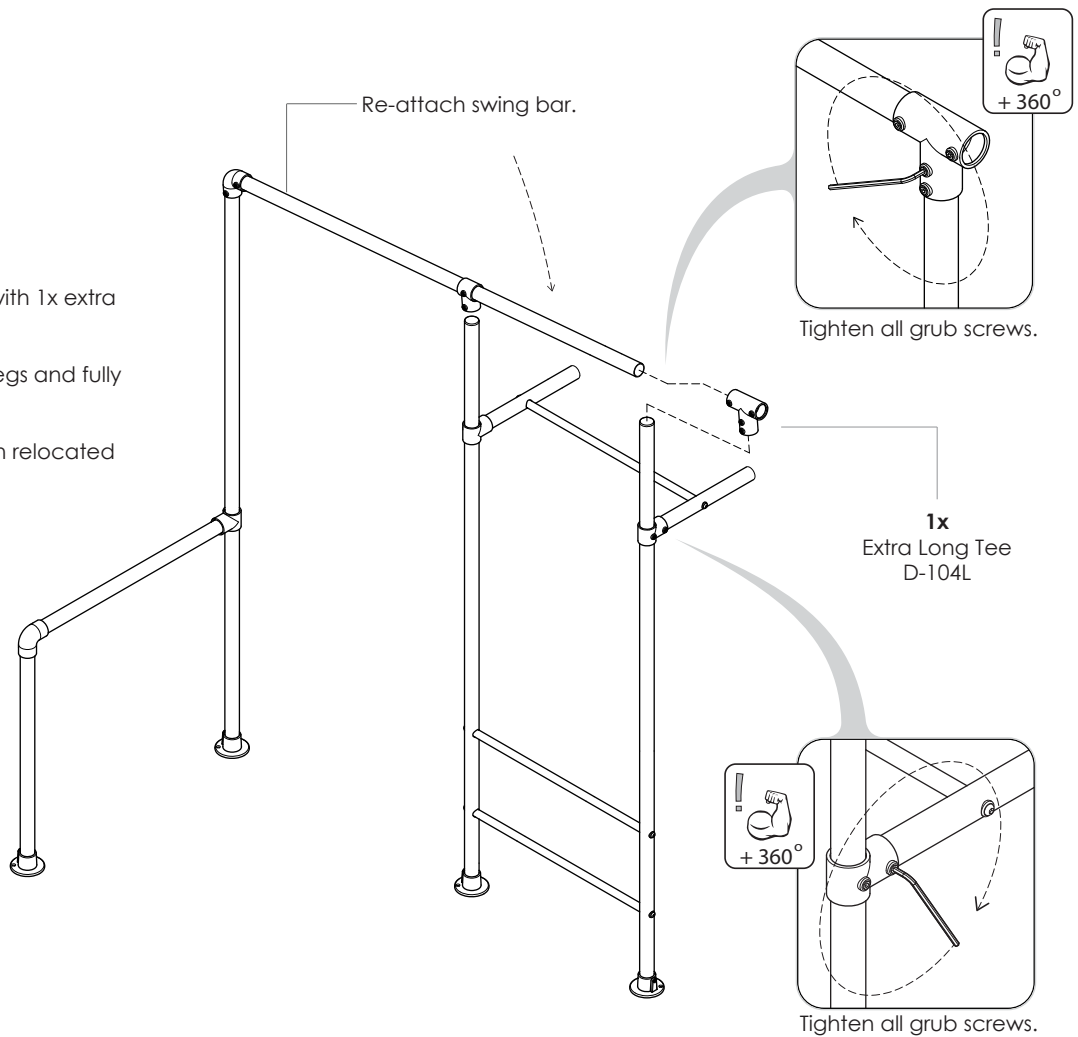

ASSEMBLY INSTRUCTIONS - SWING BAR

6 ASSEMBLE SWING BAR AND LEG

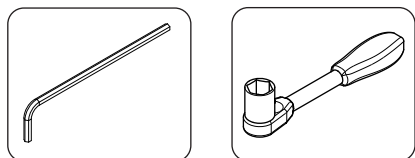


On flat level ground assemble new swing bar and leg assembly.


NOTE: The short tee and elbow are reused from steps 3&4.

NOTE: If you are adding an accessory to the new swing tube, slide swing hooks (or required fittings) on at this stage.

Fully tighten all grub screws on elbow and base plate, leave short tee loose.

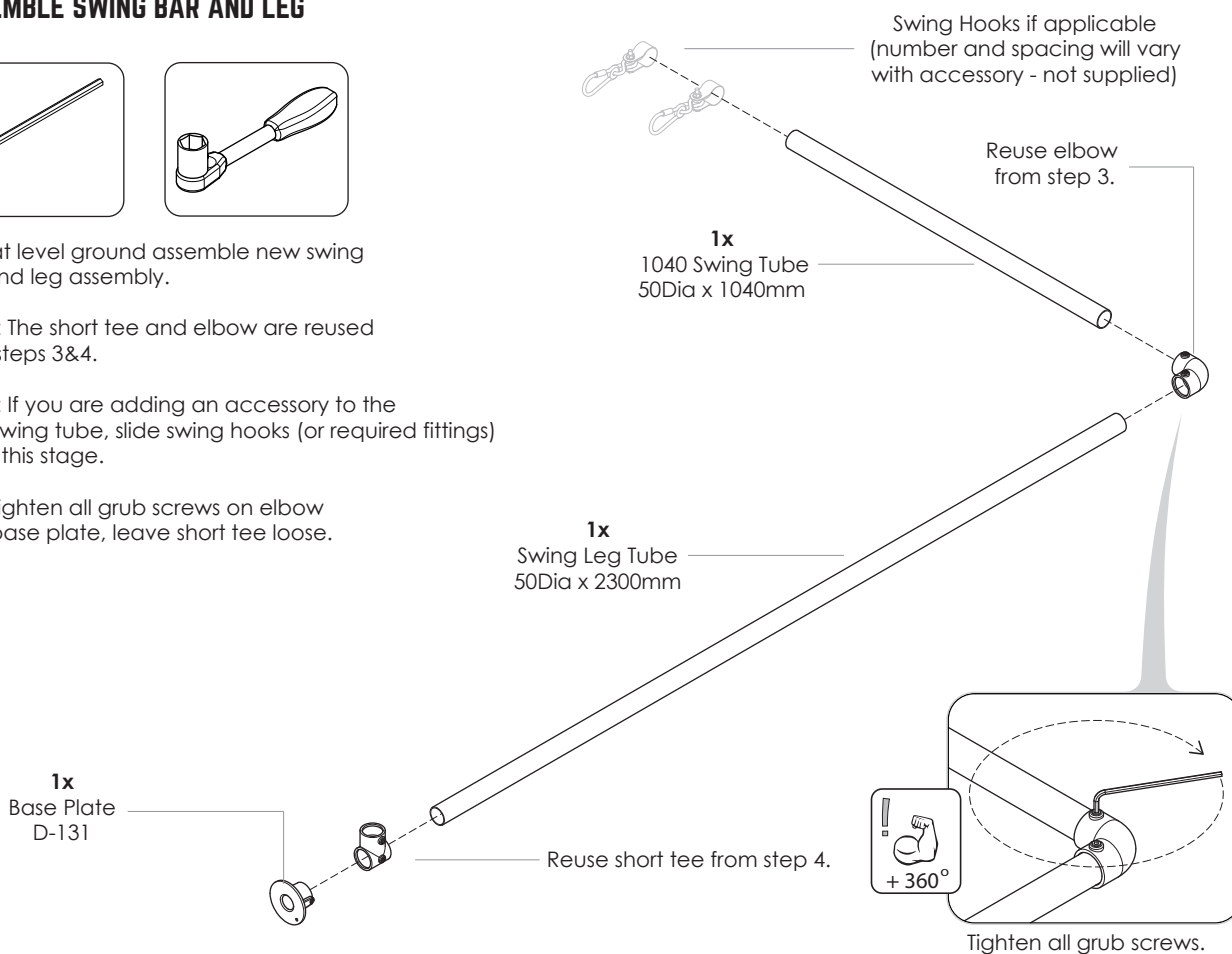


7 ATTACH SWING BAR

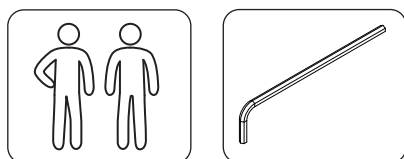


Lift the swing bar and leg assembly from step 6 into position and fully insert the swing tube extension into the extra long tee.


Fully tighten grub screws on extra long tee.

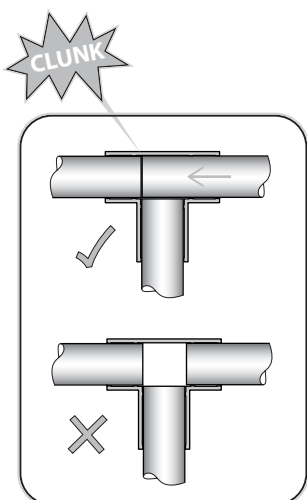


Ensure swing bar extension is fully inserted into extra long tee & makes contact with existing swing bar.

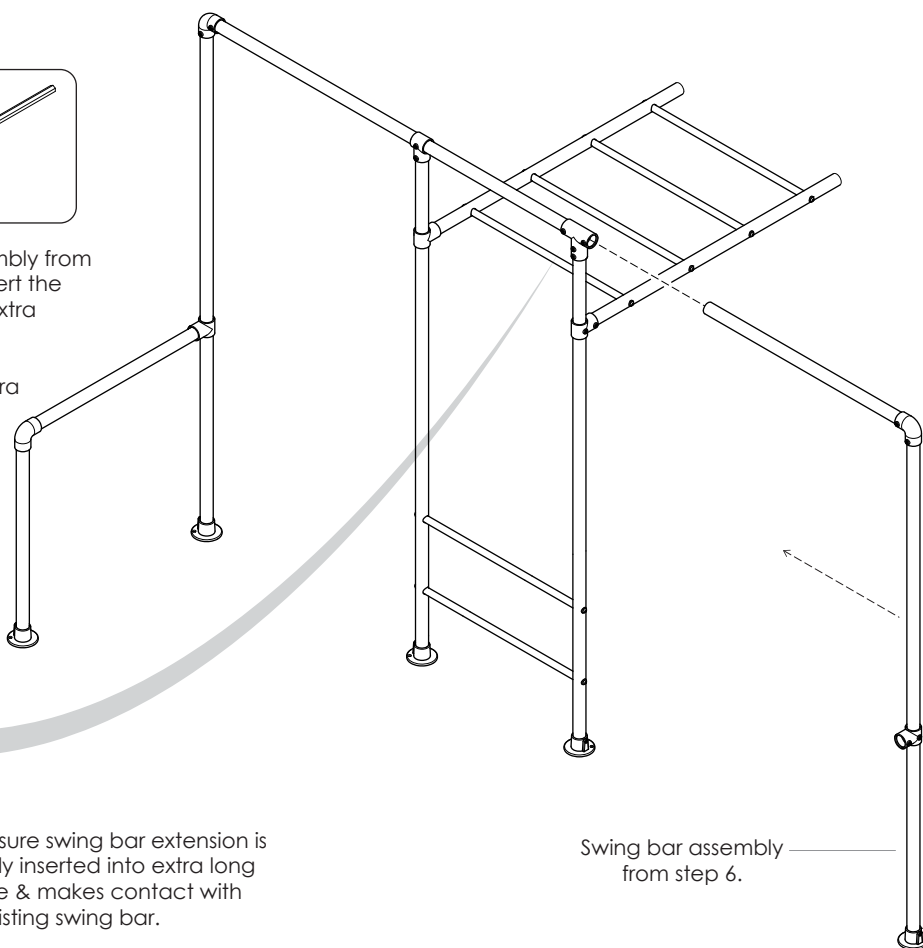

8 ATTACH TWIRLY WHIRLY BARS x4





1. Adjust & rotate short tee A to align level with twirly whirly bar reused from step 3.
2. Tighten grub screws fixing twirly whirlys to legs.

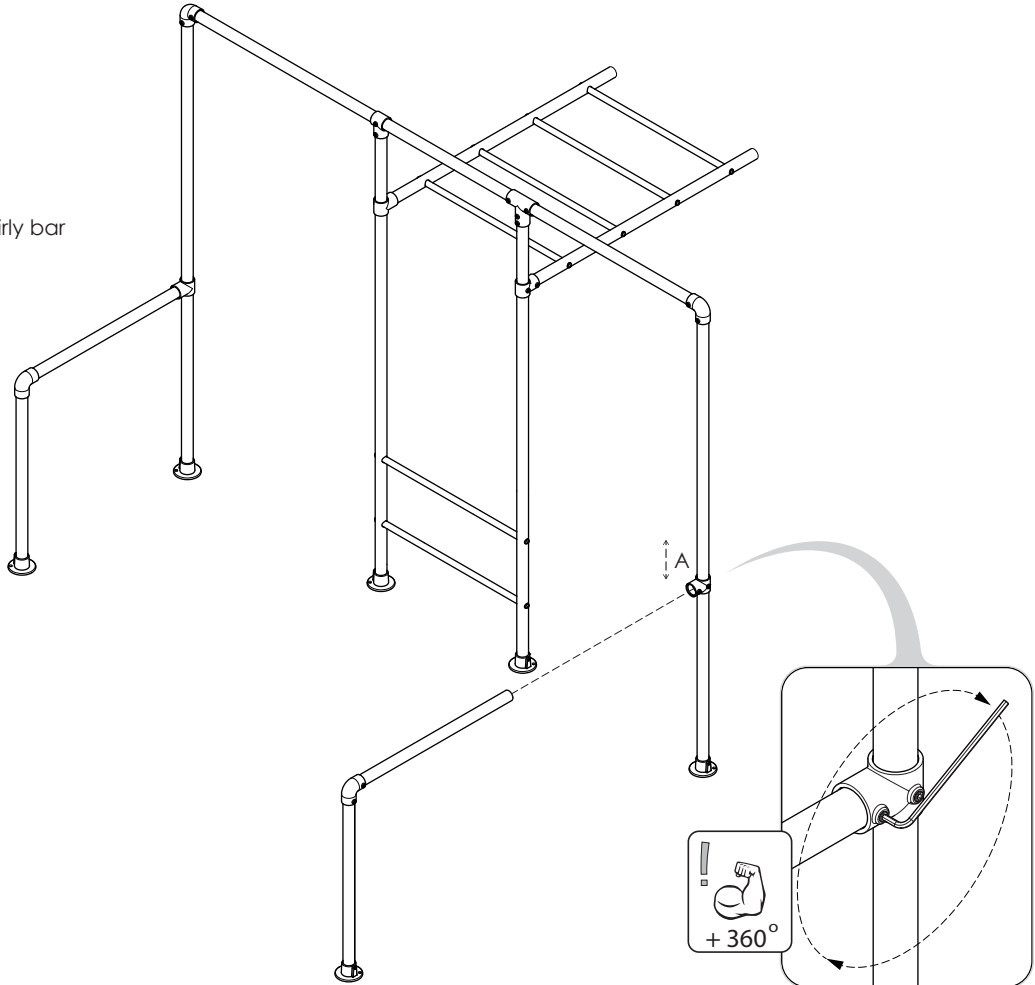


Tighten all grub screws.

9 SECURE TO GROUND




1. Check level and square.
2. Hammer in pegs on installed swing leg and twirly whirly bar.

NOTE: To reduce movement in your frame load your twirly whirly bar as per original frame assembly instructions or refer to website www.funkymonkeybars.com/pages/videos




Hammer in pegs x2.

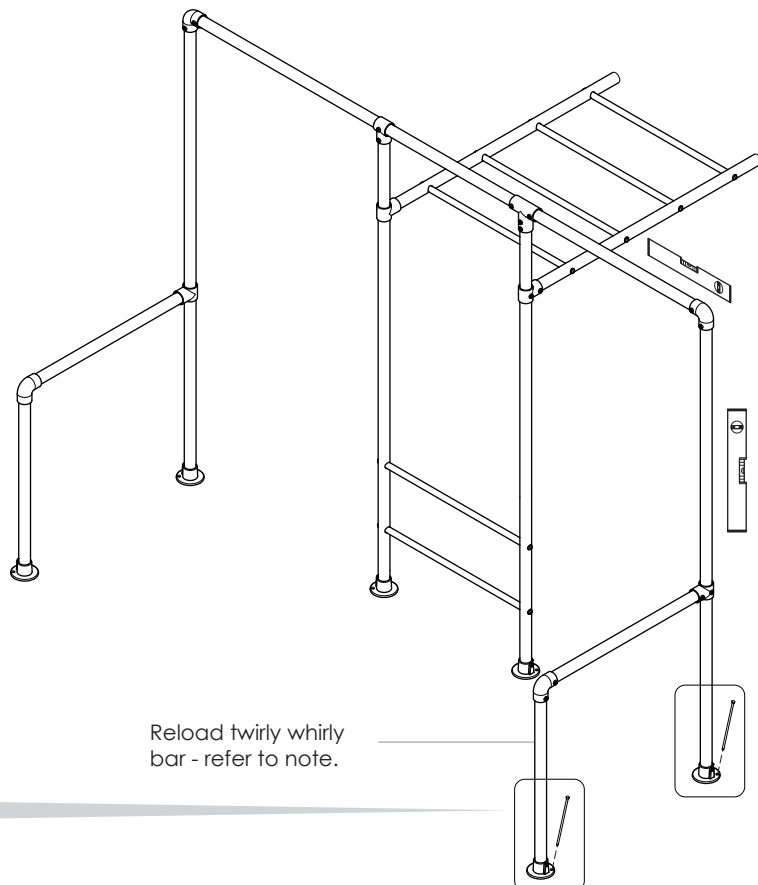


Reload twirly whirly bar - refer to note.

10 CHECK ALL FITTING GRUB SCREWS & RUNG BOLTS ARE FULLY TIGHTENED - ATTACH ACCESSORIES (IF APPLICABLE)

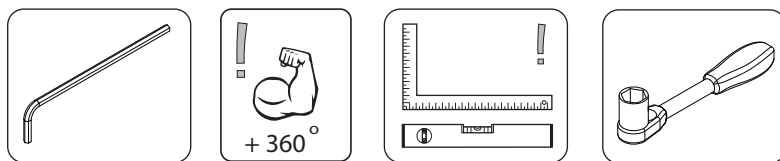

1. Ensure frame is square and level.
2. Firmly tighten all grub screws and bolts.
3. Attach new accessories in desired position (if applicable) and tighten swing hook bolts with ratchet. Refer to individual accessory assembly instructions for details.

11 MAINTENANCE.

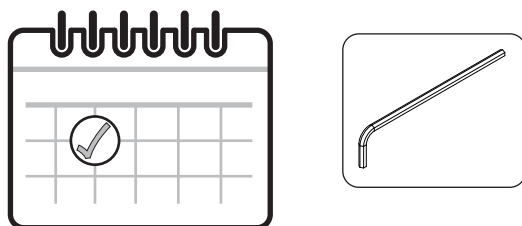

At the beginning of each heavy play session (especially a party) and twice a month during play season ensure:

1. Tighten all hardware - grub screws, nuts and bolts.
2. Pegs are in place and fully secure.
3. Lubricate all metallic moving parts with WD40 or Vaseline - (trolley and swing hooks.)
4. Ensure your frame is level and square.

FAILURE TO DO SO COULD RESULT IN SERIOUS INJURY OR DEATH.

**FOR MORE INFORMATION AND ASSEMBLY TIPS
PLEASE REFER TO OUR WEBSITE VIDEO INSTRUCTION SECTION AT
[HTTP://WWW.FUNKYMONKEYBARS.COM/PAGES/VIDEOS](http://www.funkymonkeybars.com/pages/videos)**

12 HAVE FUN





ABN 72 164 496 520
 1300 912 198
 info@funkymonkeybars.com
 www.funkymonkeybars.com
 9 Cutting Way,
Yangebup WA 6164



WE ARE SOCIAL MONKEYS



Australian Government
IP Australia

All Funky Monkey Bars® designs are registered and protected under IP Australian certification.