


FUNKY Monkey bars[®]

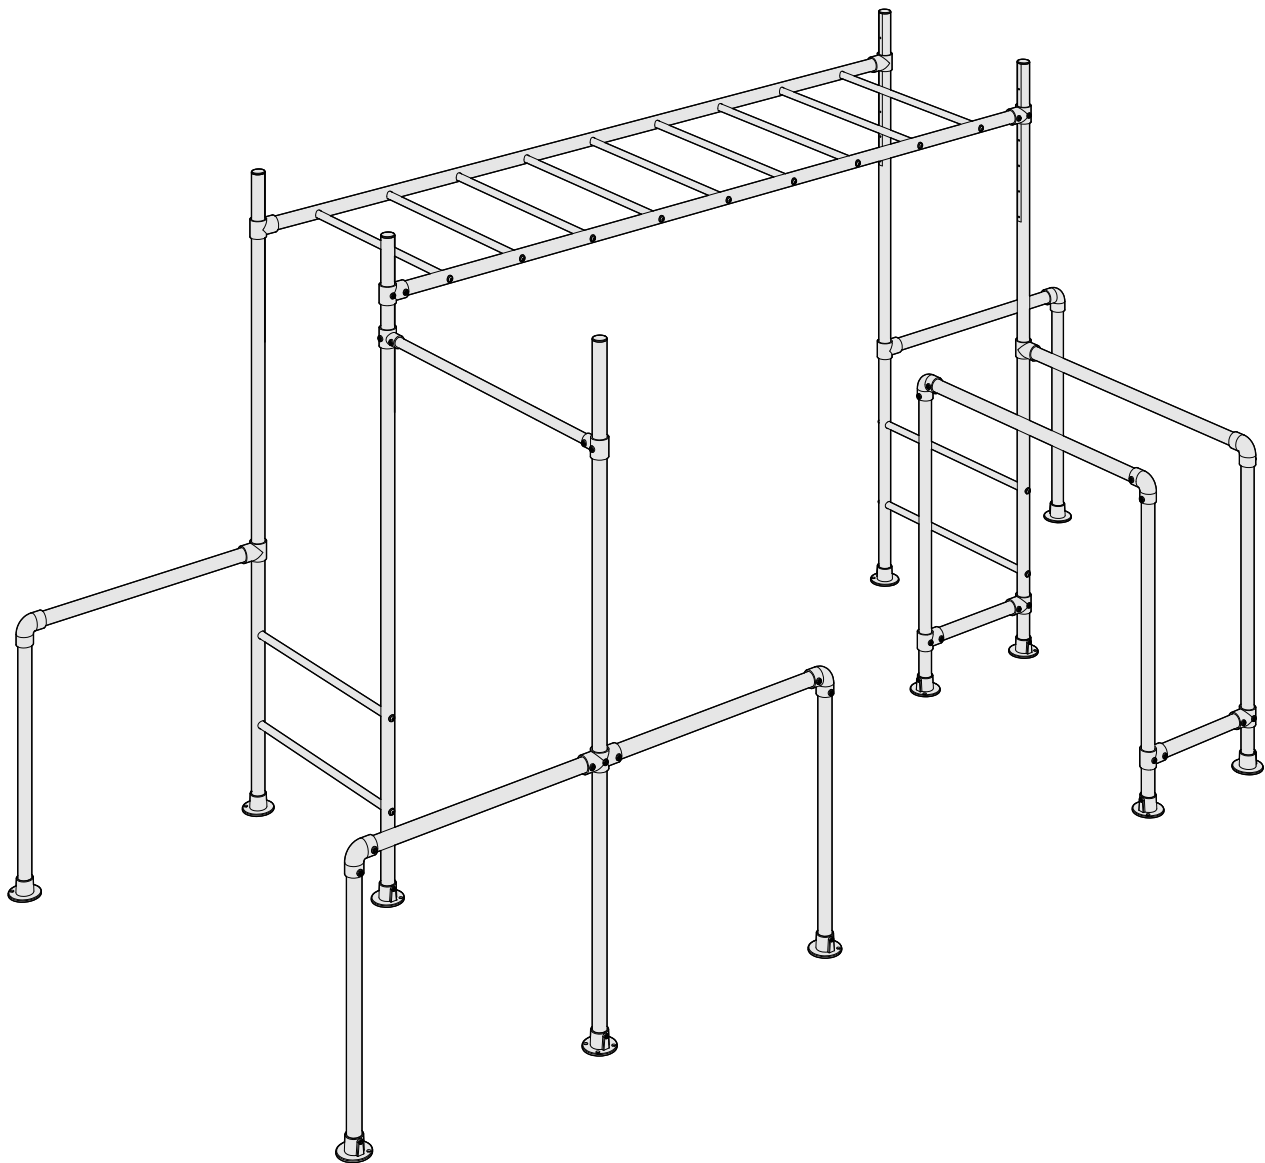

THE TAMARIN ASSEMBLY INSTRUCTIONS

CONTENTS

Warnings	Page 1
Load Rating	Page 3
Dimensions	Page 4
Assembly Tips	Page 5
Inventory	Page 7
Assembly Instructions	Page 9
Ladder Bar Assembly	Page 9
Leg Assembly	Page 11
Twirly Whirly Bar Assembly	Page 16
Main Monkey Bar Assembly	Page 17
Dip Bar Assembly	Page 19
Gym Bar Assembly	Page 21
Load Twirly Whirly Bars	Page 24
Maintenance	Page 26

WARNING

PLEASE CAREFULLY READ ALL INFORMATION CONTAINED IN THIS ASSEMBLY MANUAL BEFORE YOU INSTALL AND USE YOUR FUNKY MONKEY BARS®.


SAFETY NOTICE

1. Any person handling or using the Funky Monkey Bars® products must follow the instructions as described in this document. The person in charge of assembling and using the equipment must ensure that the recommendations for use given in this document are seen by all users.
2. Only use the Funky Monkey Bars® after they have been fully assembled and after checking that the fittings are tightened properly (*refer to page 5 - Correct Tightening Method*).
3. DO NOT install your Funky Monkey Bars® over concrete, asphalt, packed earth, wood decking or any other hard surface. A fall onto a hard surface can result in serious injury or death.
4. Inspect all grub screws, bolts and nuts at the beginning of each play session to ensure your Funky Monkey Bars® are tight and secure.
5. Ensure all tubes are fully inserted into fittings until you hear the magic "CLUNK" sound.
6. Ensure your Funky Monkey Bars® are properly secure at ALL times. Pegs are in place and inserted fully into the ground.
7. DO NOT exceed the maximum load/weight limit as recommended by Funky Monkey Bars®.
8. Children should be supervised by an adult at all times.
9. Installing a gym/crash mat under the fall zone area of your Funky Monkey Bars® would be recommended for children learning this new skill. This will reduce the chance of injury and build the child's confidence while they build strength and master the skill.
10. Ensure you have thoroughly read your assembly and installation instructions and viewed our on-line installation videos at <https://www.funkymonkeybars.com/blogs/installation-maintenance-videos>
11. DO NOT climb, sit or stand on top of the monkey bar (horizontal ladder) section.
12. DO NOT jump from the top of any section of the monkey bar.
13. DO NOT use your Funky Monkey Bars® when wet as the steel will be slippery.
14. DO NOT attach items to your frame that are not designed specifically to be used with Funky Monkey Bars®, especially lower quality products that have not been approved by Funky Monkey Bars®.
15. Ensure the height of your Funky Monkey Bars® (horizontal ladder) are set at a level that is age appropriate.
16. DO NOT install your Funky Monkey Bars® over or near objects that could interfere with users in an unsafe way. Maintain a clear area around your Funky Monkey Bars®.
17. DO NOT use your Funky Monkey Bars® while under the influence of drugs and alcohol.
18. Wear clothing free of drawstrings, hooks, loops or anything that could get caught while using your Funky Monkey Bars® and result in entanglement and/or strangulation.


ASSEMBLY

1. Keep small children away from the Funky Monkey Bars® during assembly.
2. Do not attempt to use the Funky Monkey Bars® until it is completely assembled and every fitting is tight and secured.
3. Installation typically takes 3-4 hours to complete. Two people are recommended for assembly.
4. Ensure all fittings are tightened to the correct tightening method as described on page 5.
5. Assembly should be carried out on clean, dry, level surface


Please refer to the video section on the Funky Monkey Bars® website for more handy tips and assembly instructions at <http://www.funkymonkeybars.com/pages/videos>



Assembly requires 2 adults.

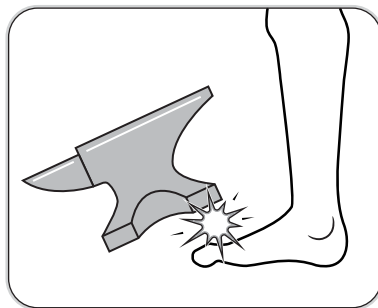

Heavy items !

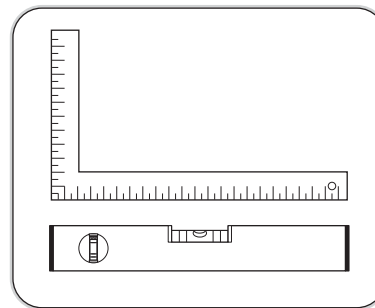

Work on flat level surface.

LOCATION

1. A safe fall zone around your Funky Monkey Bars® is essential. A minimum distance of 1.5m to 2m (5 ft to 6.5ft) is recommended around the elevated hanging points of your Funky Monkey Bars®.
2. Place your Funky Monkey Bars® on level ground, away from any structure or obstruction such as a fence, garage, house, overhanging branches, laundry lines or electrical wires and remove any obstructions beneath your Funky Monkey Bars®.
3. Ensure your Funky Monkey Bars® are positioned away from retaining walls, pool fences, structures and other play equipment. Maintain a clear space around the whole perimeter of your Funky Monkey Bars®.
4. Place your Funky Monkey Bars® on the most level surface available.

MAINTENANCE

1. At the beginning of each heavy play session we recommend the following maintenance processes be performed on your Funky Monkey Bars®:
 - Tighten all bolts, grub screws and applicable hardware (as per page 5)
 - Lubricate all metallic moving parts as per instructions (flying fox, swing hooks etc)
 - Check all protective coverings on bolts, pipes, edges and corners. Replace if they are loose, cracked or missing.
 - Check all moving parts including swing seats, shackles, snap hooks, chains and trolleys for wear, rust, or other deterioration. Replace as needed.
2. Twice a month during play season we would recommend the following maintenance processes be performed on your Funky Monkey Bars®:
 - Tighten all connections and hardware
 - Check all protective coverings on bolts, pipes, edges and corners. Replace if they are loose, cracked or missing.
3. Once a month during play season we would recommend the following maintenance processes be performed on your Funky Monkey Bars®:
 - Lubricate all metallic moving parts as per instructions (flying fox, swing hooks etc). If swings start to squeek then lubricate swing hooks.
 - Check all moving parts including swing seats, ropes, chains and trolleys for wear, rust, or other deterioration. Replace as needed.
 - Owners shall be responsible for maintaining the legibility of any warning labels.

For additional information concerning your Funky Monkey Bars®, please contact our customer service team or check our website for any important updates. Phone -1300 912 198 or www.funkymonkeybars.com



QUALITY & INDEPENDENT TESTING

At Funky Monkey Bars® we take the quality of our designs and safety very seriously. All Funky Monkey Bars® frames go through a stringent, independent structural testing process prior to being made available for release to our customers.

Our frames are designed within the parameters of the Australian Standard for Playground Equipment AS4685.1:2014.

The structural integrity of our frames has been tested for performance through a combination of engineering calculations and physical testing. The tests have been performed by independent, certified structural engineers in accordance with Australian Standard for Playground Equipment AS4685.1:2014 and European Standards EN1176-1:2008.


The independent testing conducted on The Tamarin certified the frame to a load rating of 900kgs or 15 users.

LOAD TESTING CERTIFICATION				
DATE OF TEST	MODEL	NUMBER OF USERS	USER LOAD (KG)	LOAD RATING (KG)
Aug 2018	The Tamarin	15	60	900
I hereby confirm all testing was undertaken in accordance with Physical Testing of Structural Integrity requirements of AS 4685.1: 2014 App C / EN 1176-1:2008 ^o except where noted below;				
COMMENTS: N/A				
APPROVED BY: Funky Monkey Bars® 			WITNESSED BY: Independent Engineer 	
DATE : Aug 2018			DATE : Aug 2018	


DIMENSIONS

FUNKY MONKEY BARS® THE AERIAL TAMARIN OVERALL DIMENSIONS

A minimum of 2.0 Metres clear fall zone
is recommended around the elevated
hanging points of your Funky Monkey Bars®.

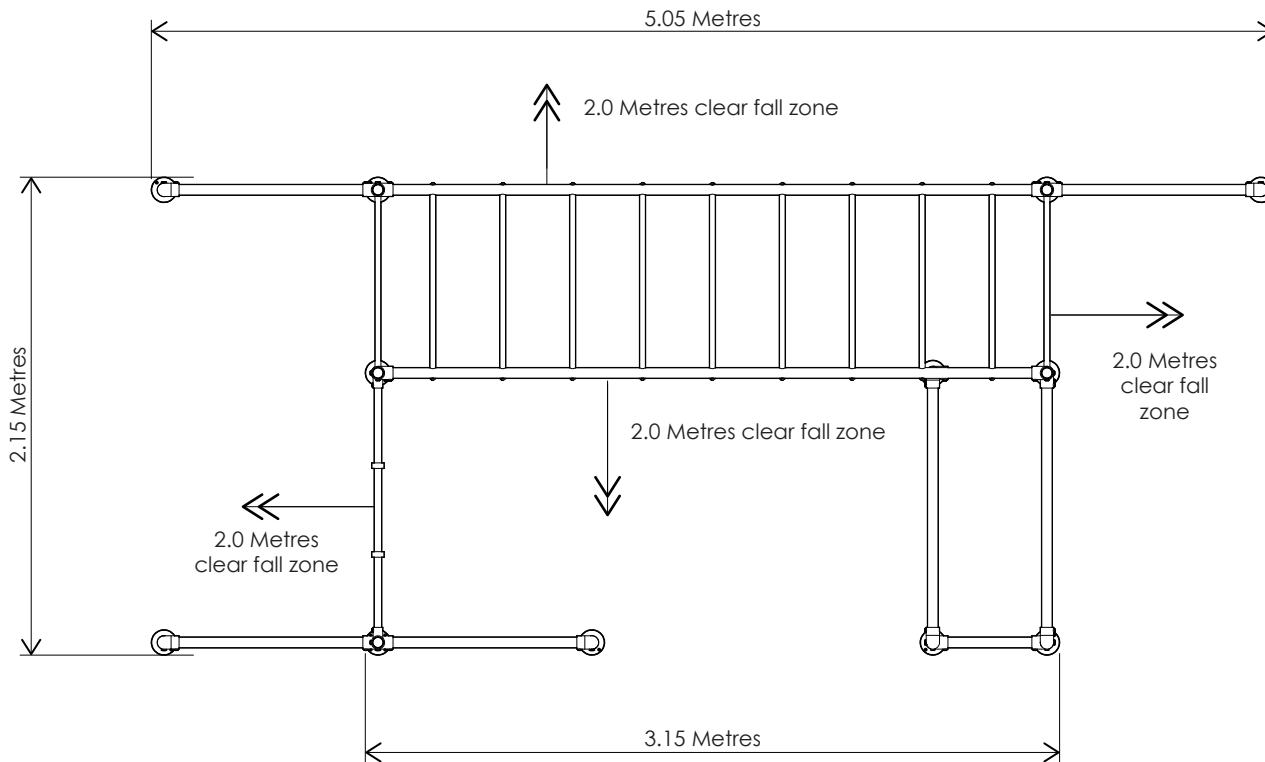

PLAN VIEW
(not to scale)

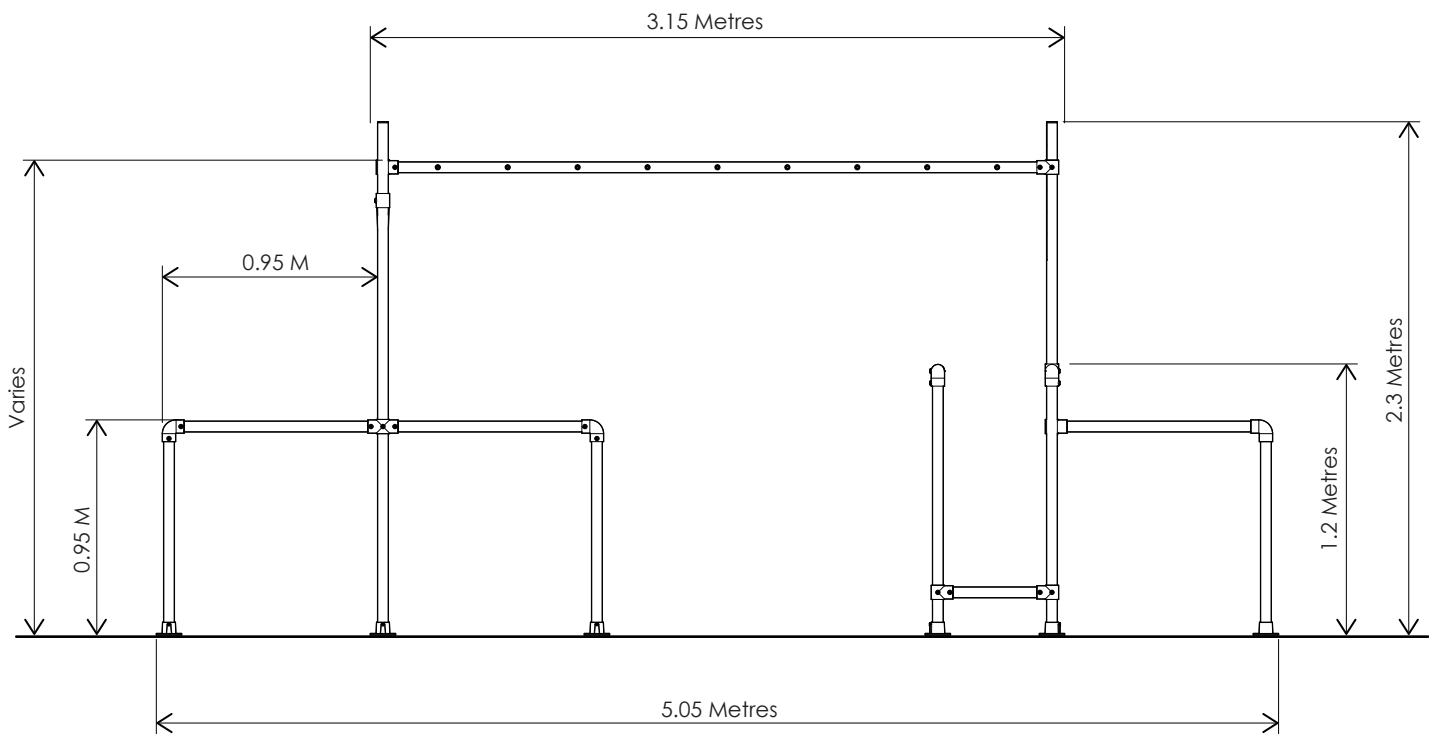


SIDE VIEW
(not to scale)


ASSEMBLY TIPS

CORRECT INSERTION INTO FITTINGS - (INDICATIVE DIAGRAM SHOWN)

All tubes must be fully inserted until contact is made with adjoining tube.

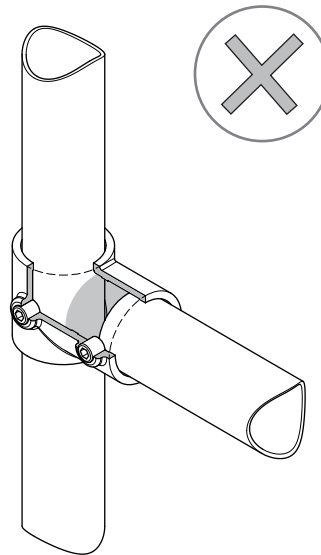


Gap.

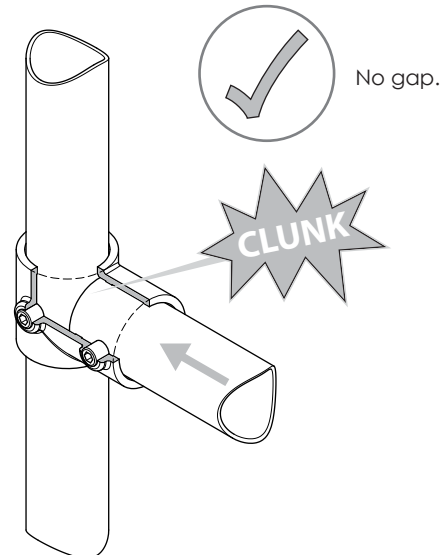


No gap.

CORRECT TIGHTENING METHOD OF GRUB SCREWS - (INDICATIVE DIAGRAM SHOWN)

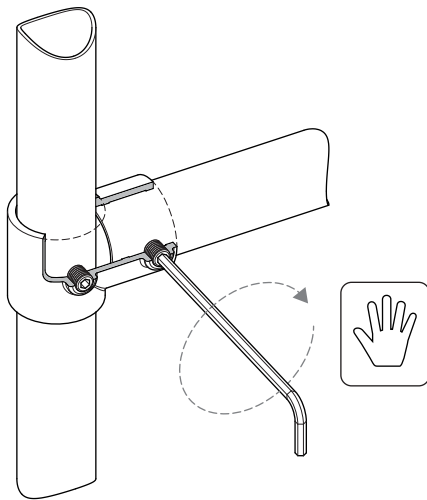


1. With long end of allen key, hand tighten grub screw as much as possible.

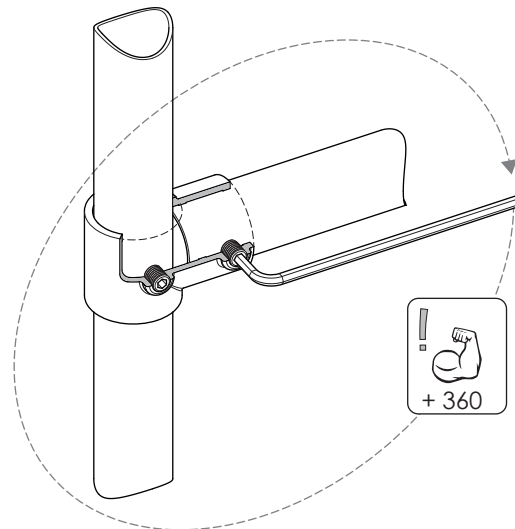


2. Using other end of the allen key do one full 360 degree turn as a minimum, use muscles!



CORRECT TIGHTENING METHOD OF RUNG BOLTS - (INDICATIVE DIAGRAM SHOWN)

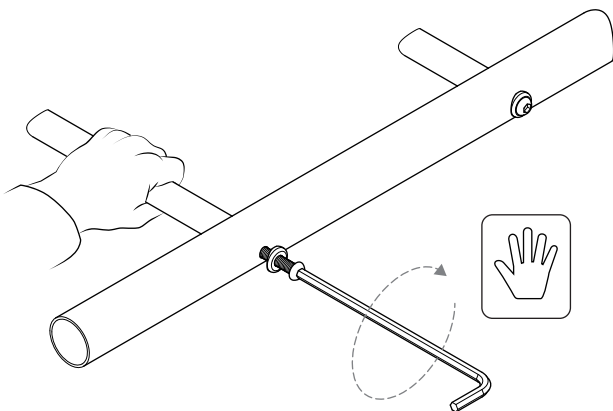

1. With long end of allen key, hand tighten bolt hard up against washer and outside of tube. Hold rung to avoid rotation.

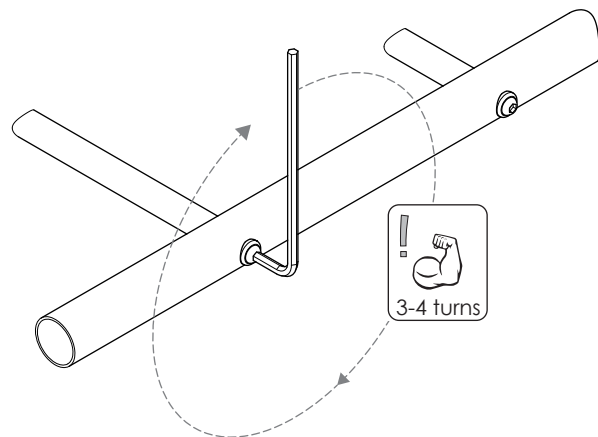


2. Using short end of the allen key fully tighten, approximately 3-4 full turns .






ASSEMBLY TIPS (CONTINUED)

IT IS CRITICAL YOUR MAIN FRAME IS 100% SQUARE AND LEVEL (INDICATIVE DIAGRAM SHOWN)




Check assembly is 100% level, square & straight.

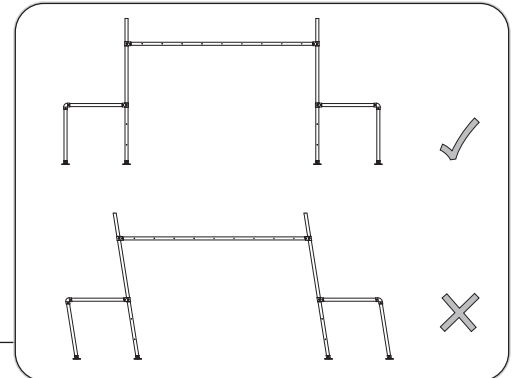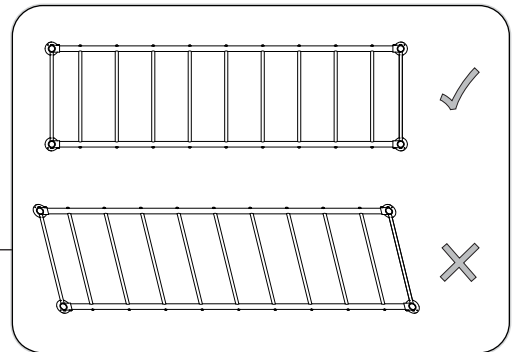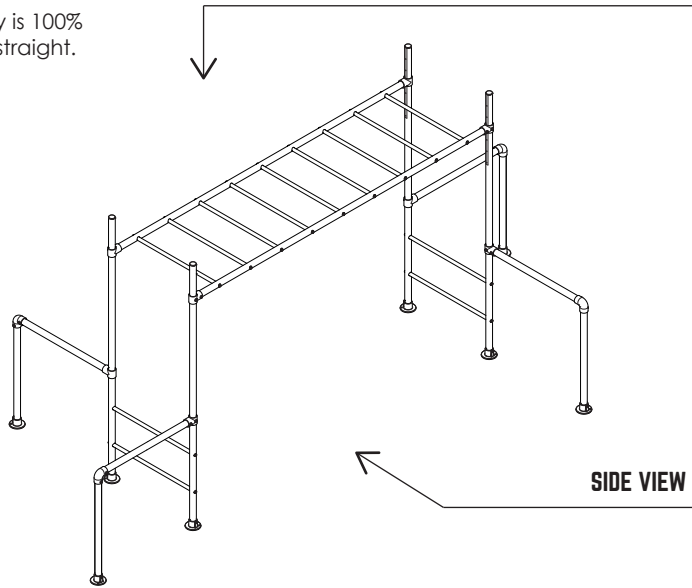

If your frame is not straight or level remove pegs, loosen grub screws, re-adjust re-tighten and re-peg the frame.


INSTALLATION ON A SLOPE

If your frame is being installed on a slope ensure the monkey ladder bar is level. Either install at different heights on the legs or dig down at one end until level.

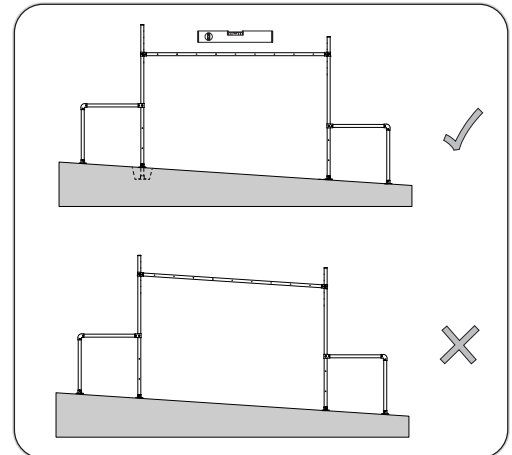


TYPICAL FITTING ORIENTATION - (INDICATIVE DIAGRAM SHOWN)

Unless otherwise stated all grub screws and fittings should face downwards and outwards. This will reduce weathering damage, help with assembly and ease of maintenance.

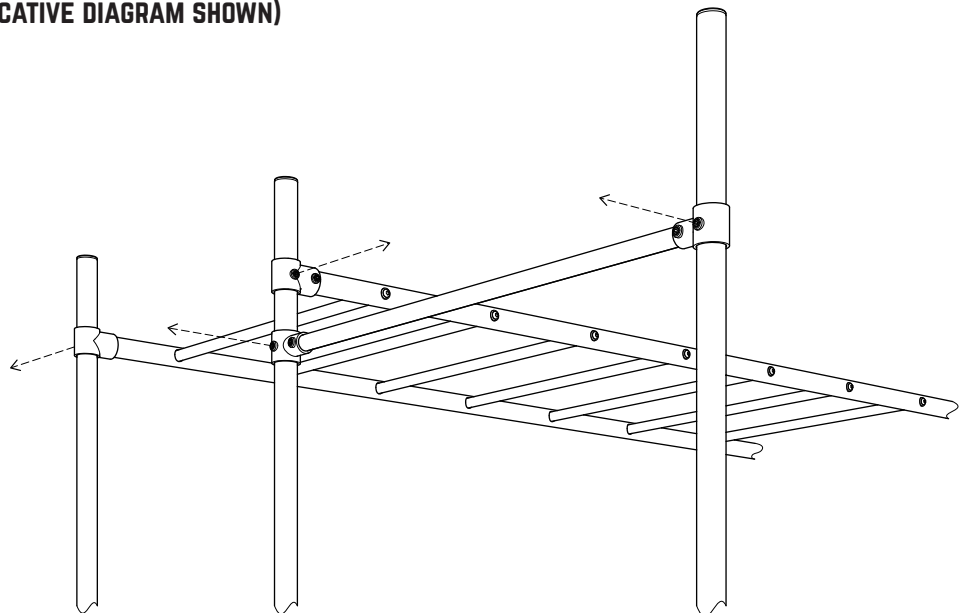

INVENTORY

TOOLS REQUIRED FOR INSTALLATION

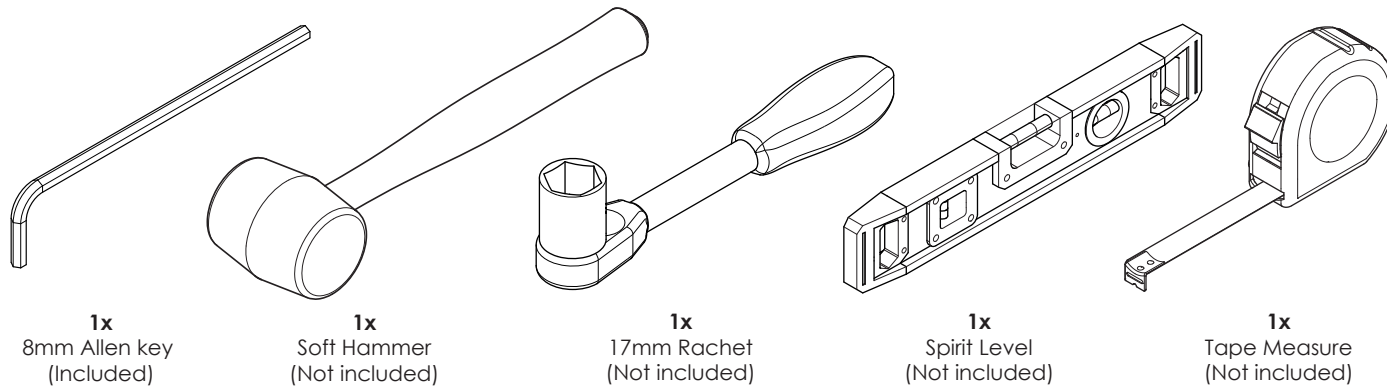

1x
8mm Allen key
(Included)

1x
Soft Hammer
(Not included)


1x
17mm Ratchet
(Not included)

1x
Spirit Level
(Not included)


1x
Tape Measure
(Not included)

TUBES

2x 50Dia. x 450mm
Brace Tube




25Dia. x 850mm




13x
Rung Tube

8x 50Dia. x 900mm
Twirly Tube




33Dia. x 1150mm




1x
Chin up Tube

3x 50Dia. x 1150mm
Dip Vertical Tube



2x 50Dia. x 1150mm
Dip Horizontal Black Tube




1x 50Dia. x 2300mm
Gym Leg Tube




4x 50Dia. x 2300mm
Adj. Leg Tube




2x 50Dia. x 2950mm
Ladder Tube




FITTINGS




7x
Elbow
D-125




11x
Short Tee
D-101




2x
Reducing Tee
D-101 D48-B34



1x
Straight Through
D-119



11x
Base Plate
D-131




1x
Base Plate
D-131-4 Hole




15x
Peg

INVENTORY (CONTINUED)


HARDWARE



27x
M10 Bolt




54x
Rung Insert



27x
Washer




54x
M10 Hex Nut



5x
Plastic End Cap



1x
Manufacture Sticker

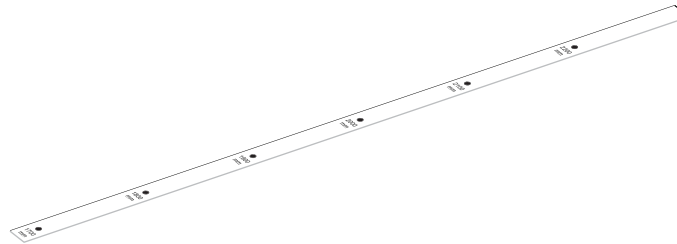

4x
Height Sticker


COMPONENTS (NOT APPLICABLE)

One of the best things about a Funky Monkey Bar is the ability to add new equipment and accessories as your child and family grows. You can swap or add accessories to your existing frame, or add extra frames that will give you more versatility to attach equipment. Check out what we've got in store now at...


WWW.FUNKYMONKEYBARS.COM

ASSEMBLY INSTRUCTIONS - LADDER BAR ASSEMBLY

1 RUNG ASSEMBLY (X13)



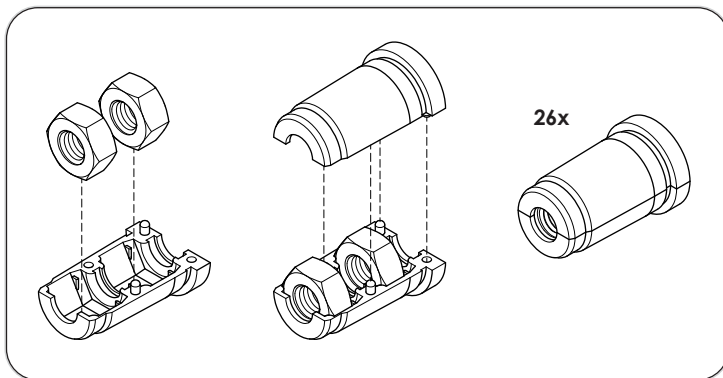


1. Assemble plastic rung inserts as shown above.

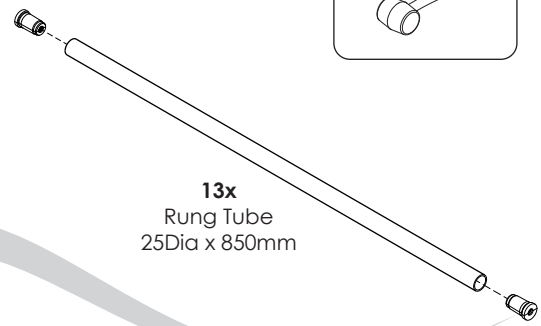


2. Push inserts into both ends of all rungs.

2 MONKEY BAR LADDER ASSEMBLY

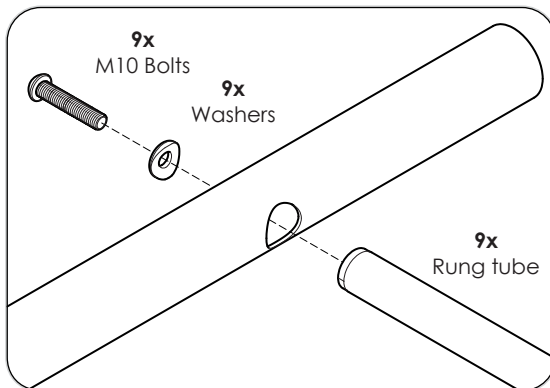


Hand tighten all bolts.


Assemble on flat surface.

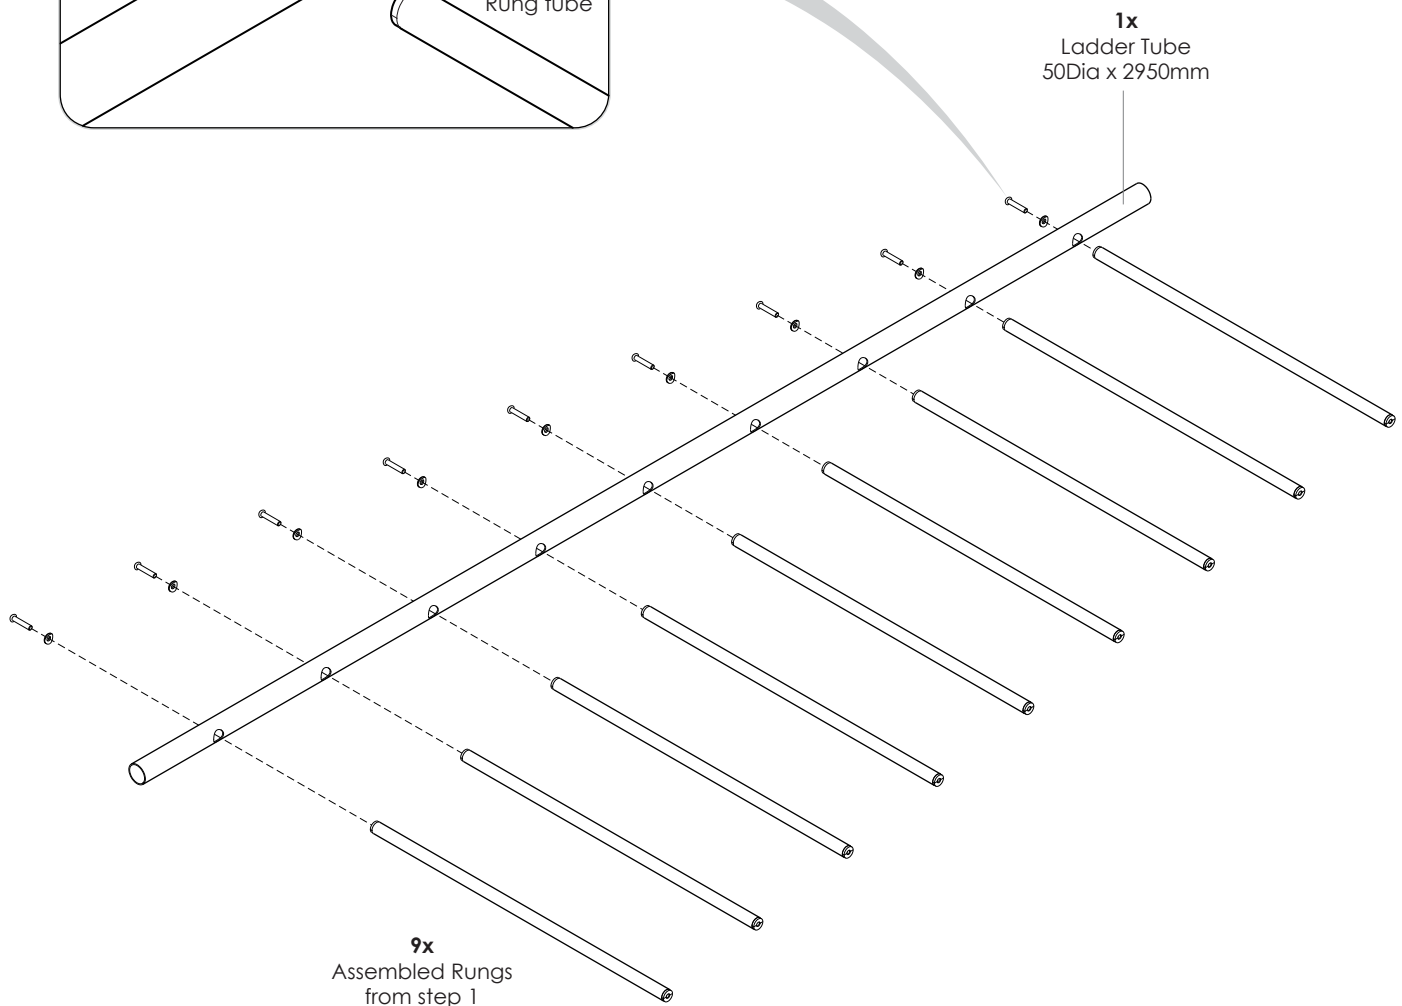


3 ATTACH SECOND LADDER TUBE




Hand tighten all bolts

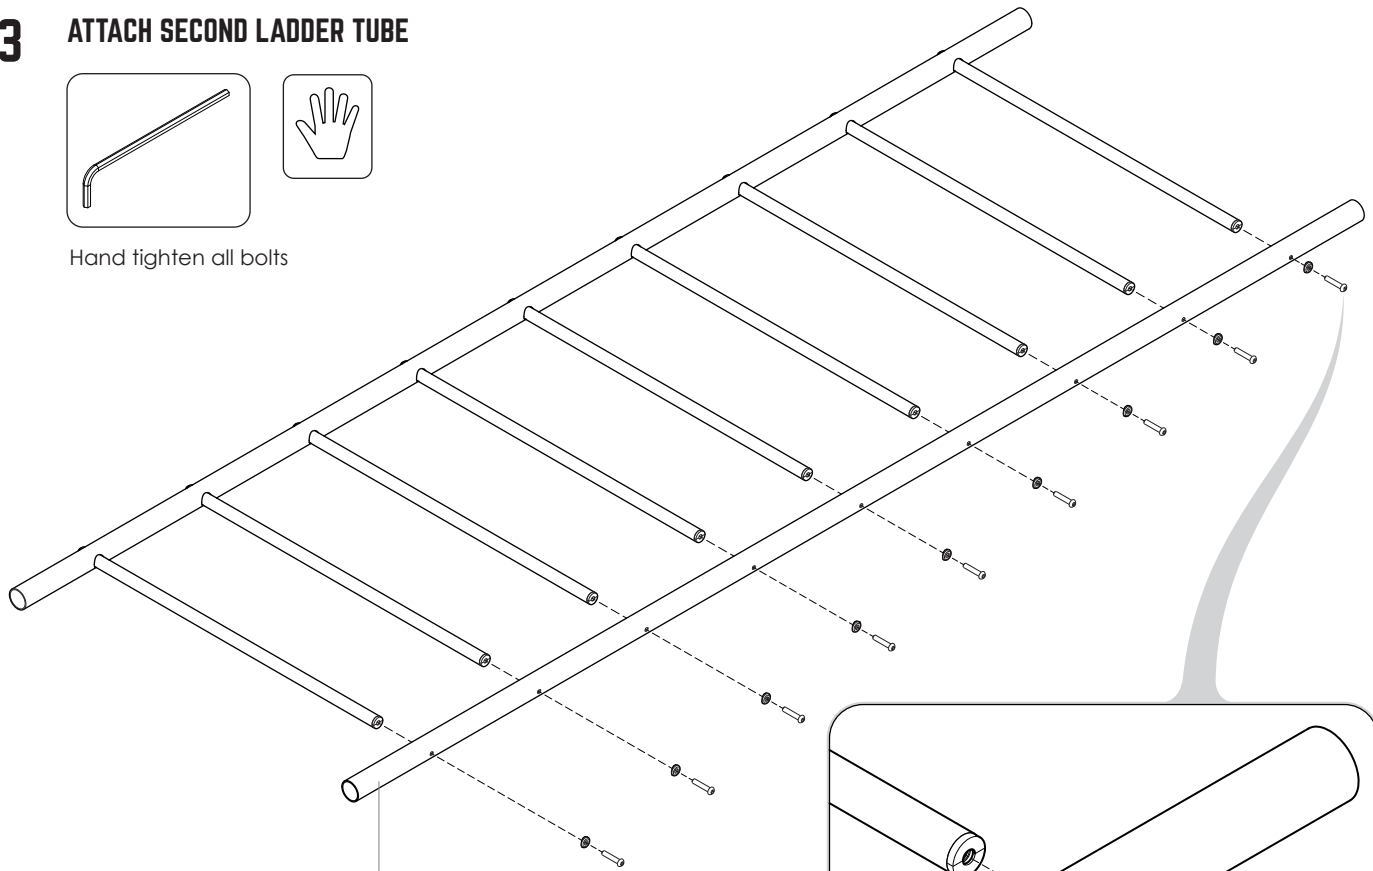



1x
Ladder Tube
50Dia x 2950mm

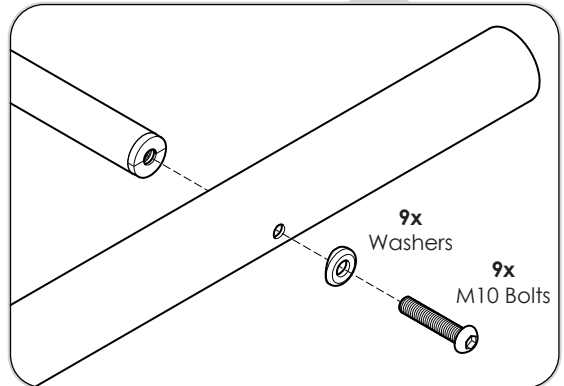

4 FIRMLY TIGHTEN ALL RUNG BOLTS.




See page 5 for correct tightening method.

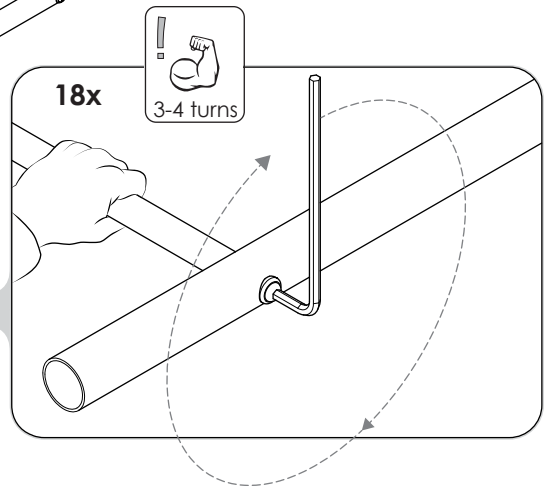
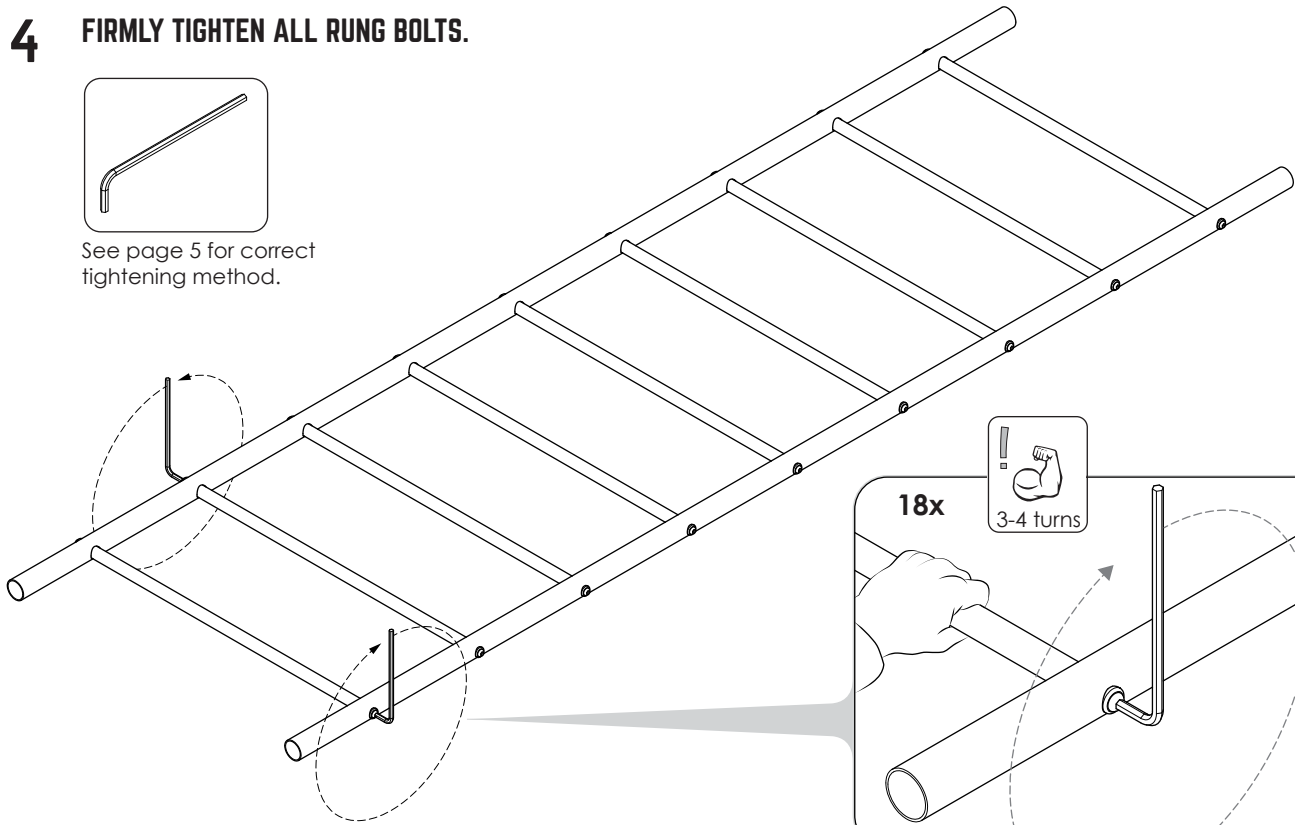


ASSEMBLY INSTRUCTIONS - LEG ASSEMBLY


5 LEG ASSEMBLY x 2

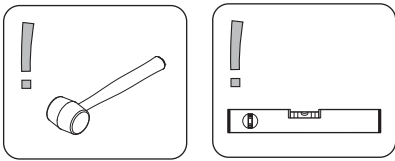



On flat level ground insert plastic end caps into leg tubes.

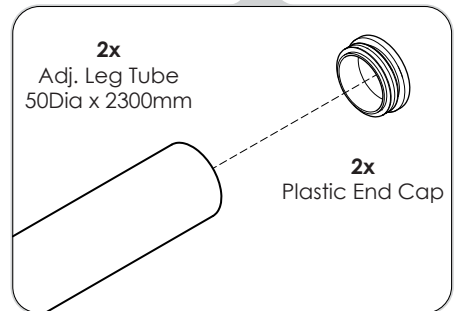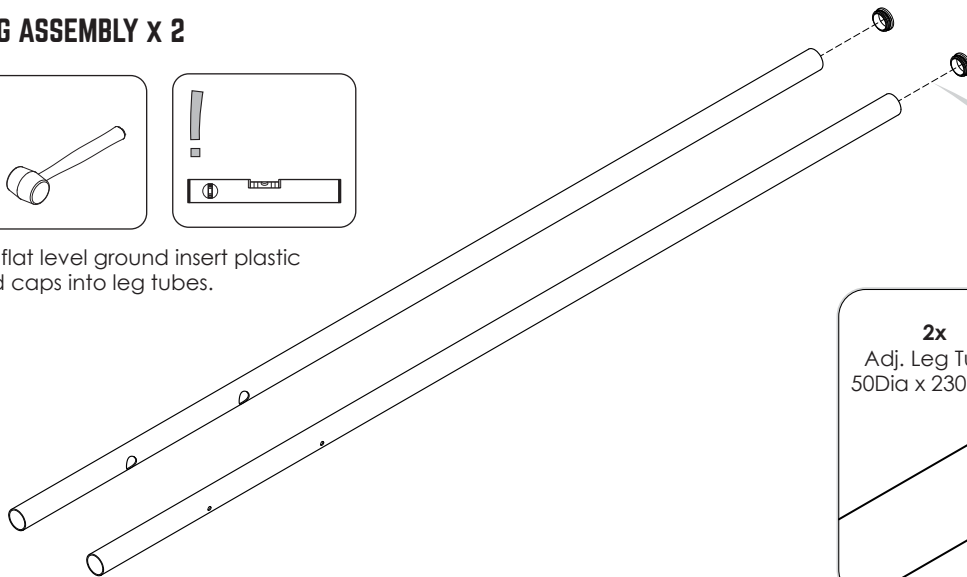


6 INSERT RUNGS





Hand tighten all bolts.

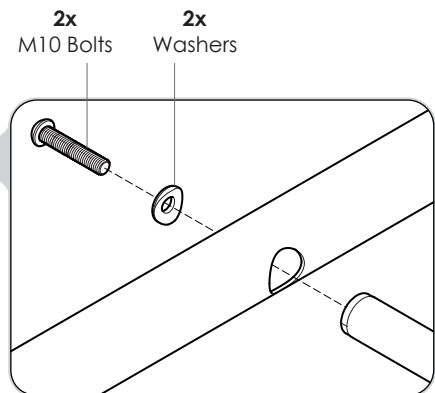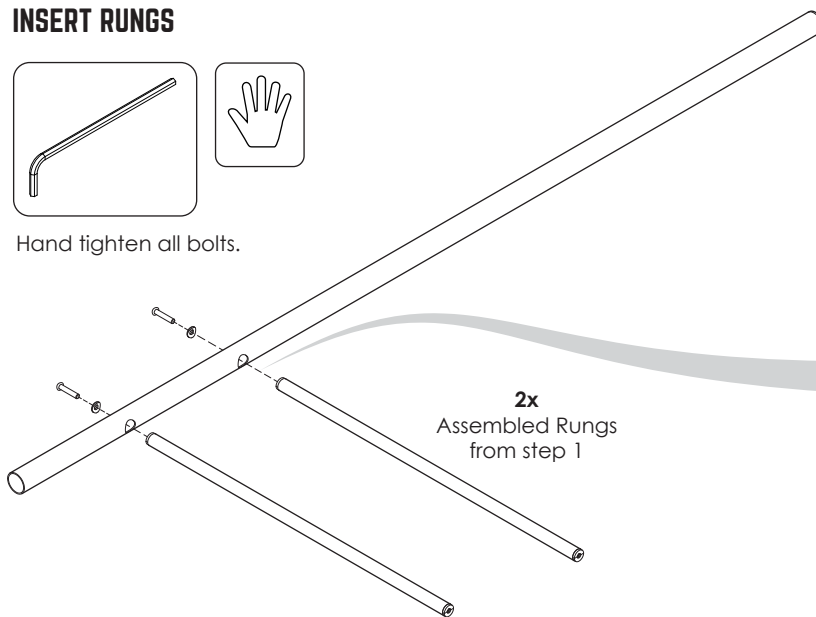


7 ATTACH SECOND LEG




Hand tighten all bolts.

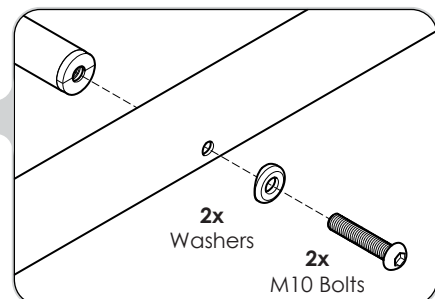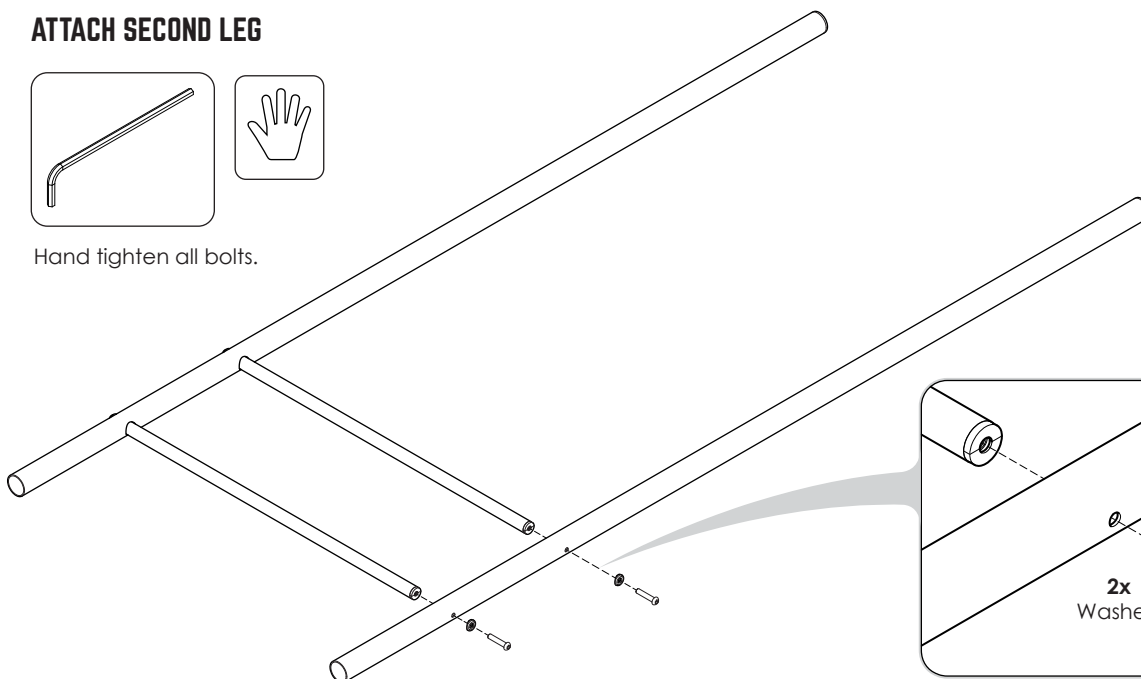


8 ATTACH BASE PLATES & SHORT TEE (A)




Slide on short tee (A) half way between rung and base plate. Tighten all grub screws.

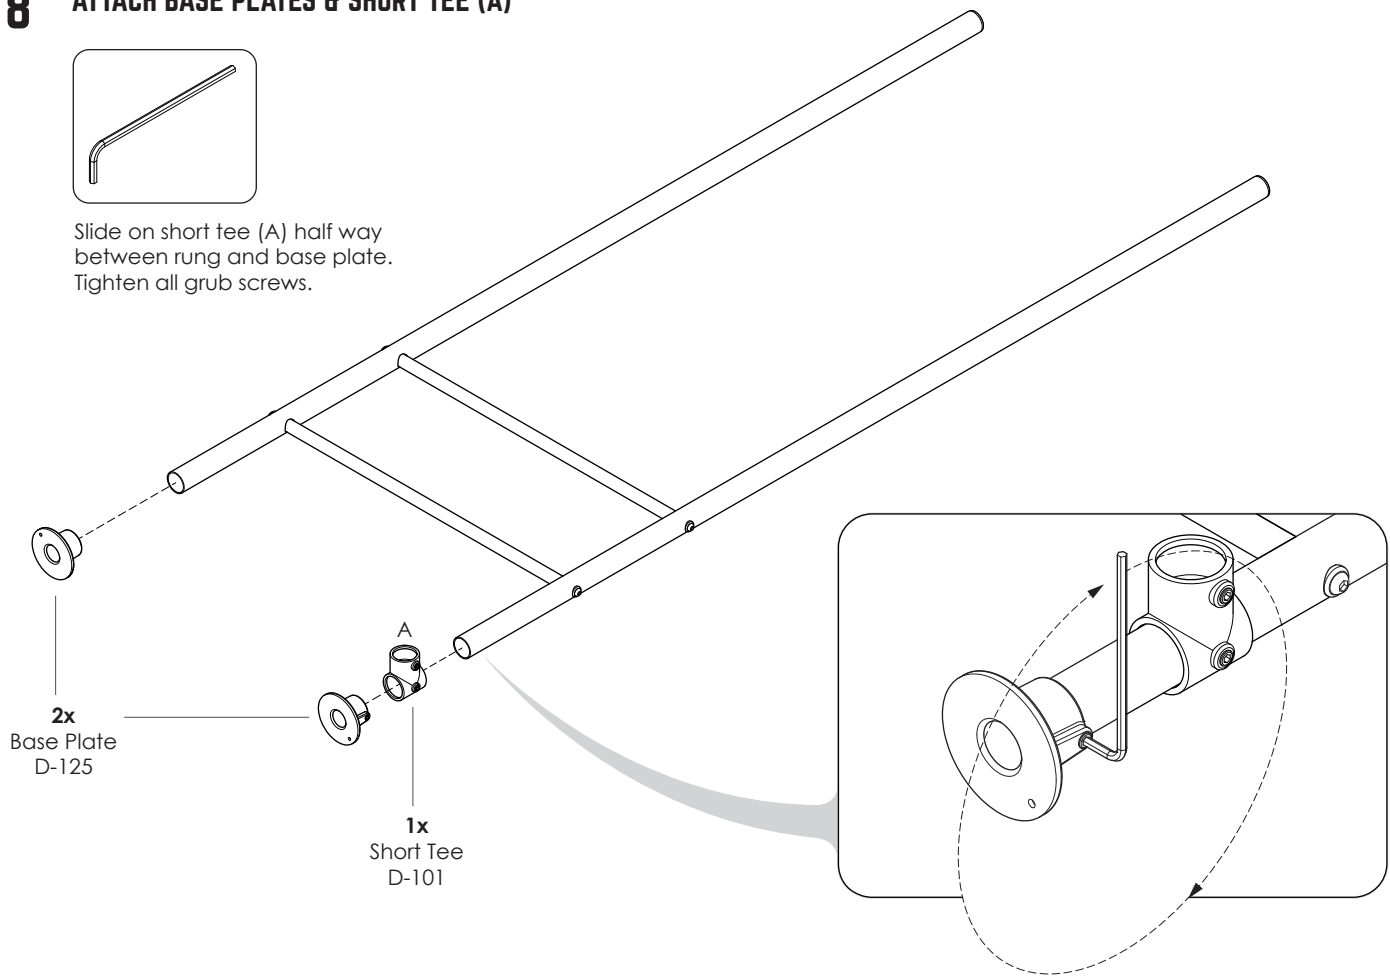


9 SLIDE ON SHORT TEES (B AND C)




Hand tighten grub screws on short tees (B and C). Temporary location.

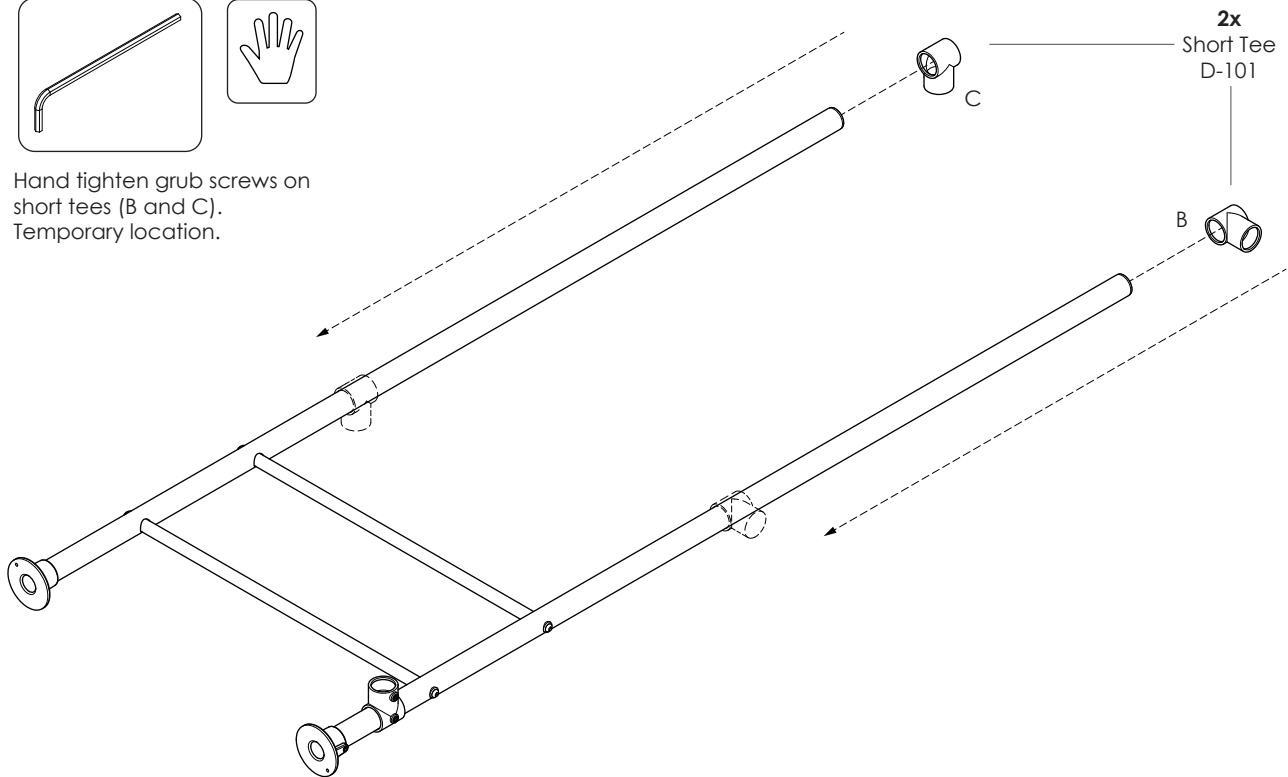


10 APPLY HEIGHT STICKERS.

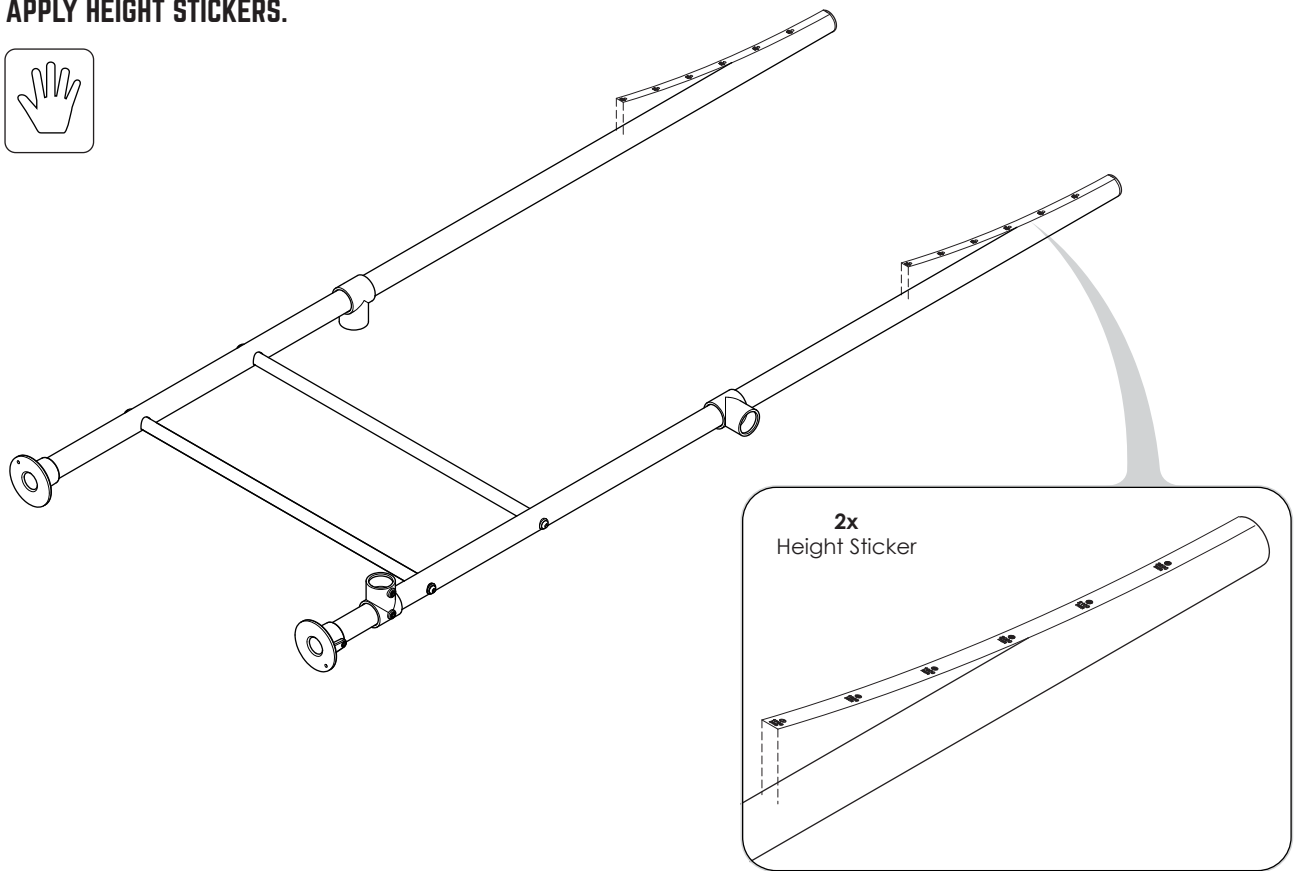

11 SET LADDER BAR HEIGHT.

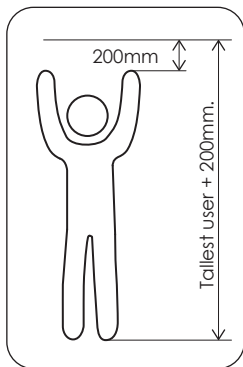


Good starting height is 100-200mm above reach.

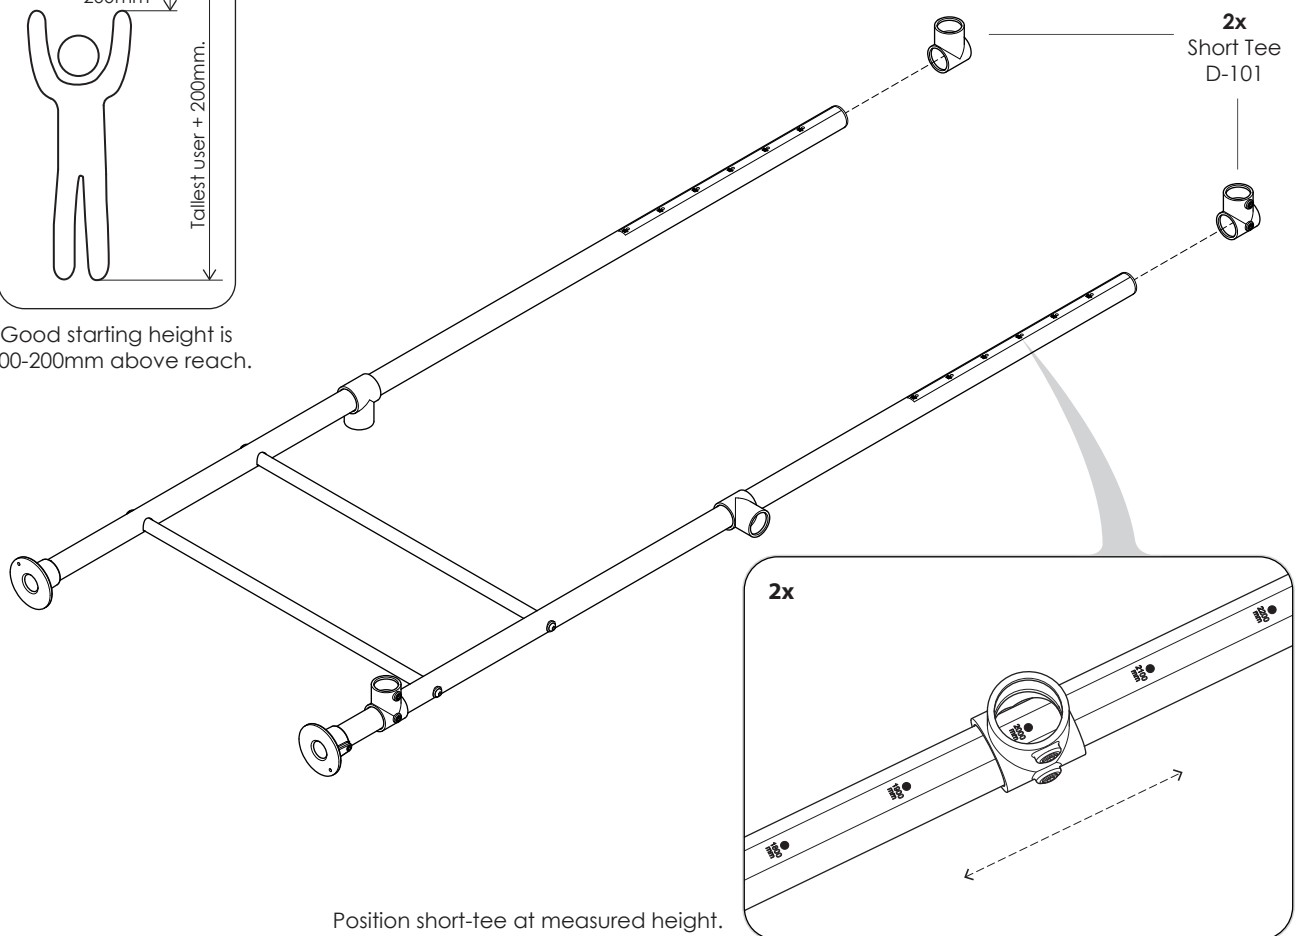


Position short-tee at measured height.


12 FIRMLY TIGHTEN ALL GRUB SCREWS & RUNG BOLTS.




Leave grub screw B and C hand tight.
(Temporary location).
Fully tighten all others.

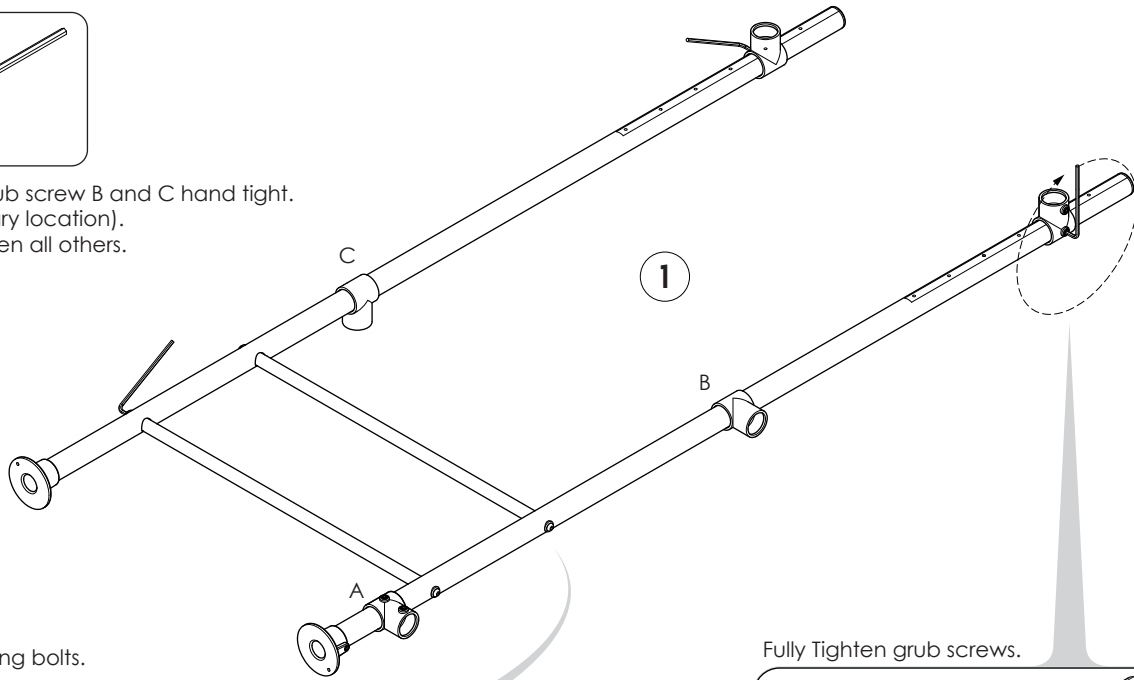

Fully Tighten rung bolts.

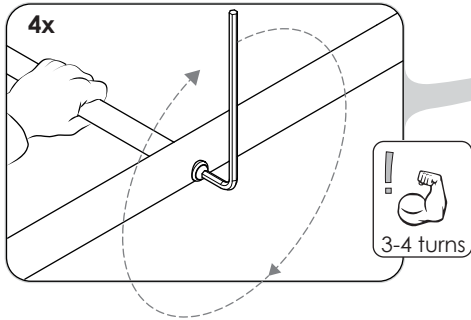


Fully Tighten grub screws.

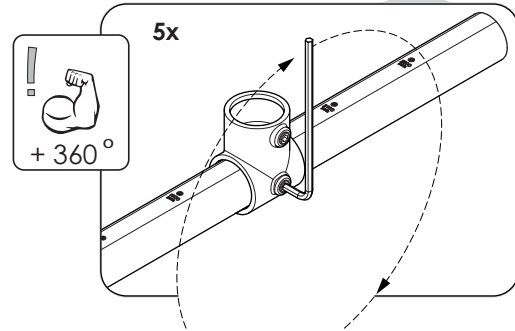


13 REPEAT STEPS 5-12 FOR 1x MORE LEG ASSEMBLY.

SAME PROCEDURE BUT WITHOUT LOWER SHORT TEE A, AND DIFFERENT FIXINGS AT TOP - (SEE STEP 14 FOR RESULT)




Position reducing tee (D) at
desired chin up bar height.
Fully tighten all grub screws.

NOTE: position of (D) could be
above short tees depending on
gym bar user height preferences.

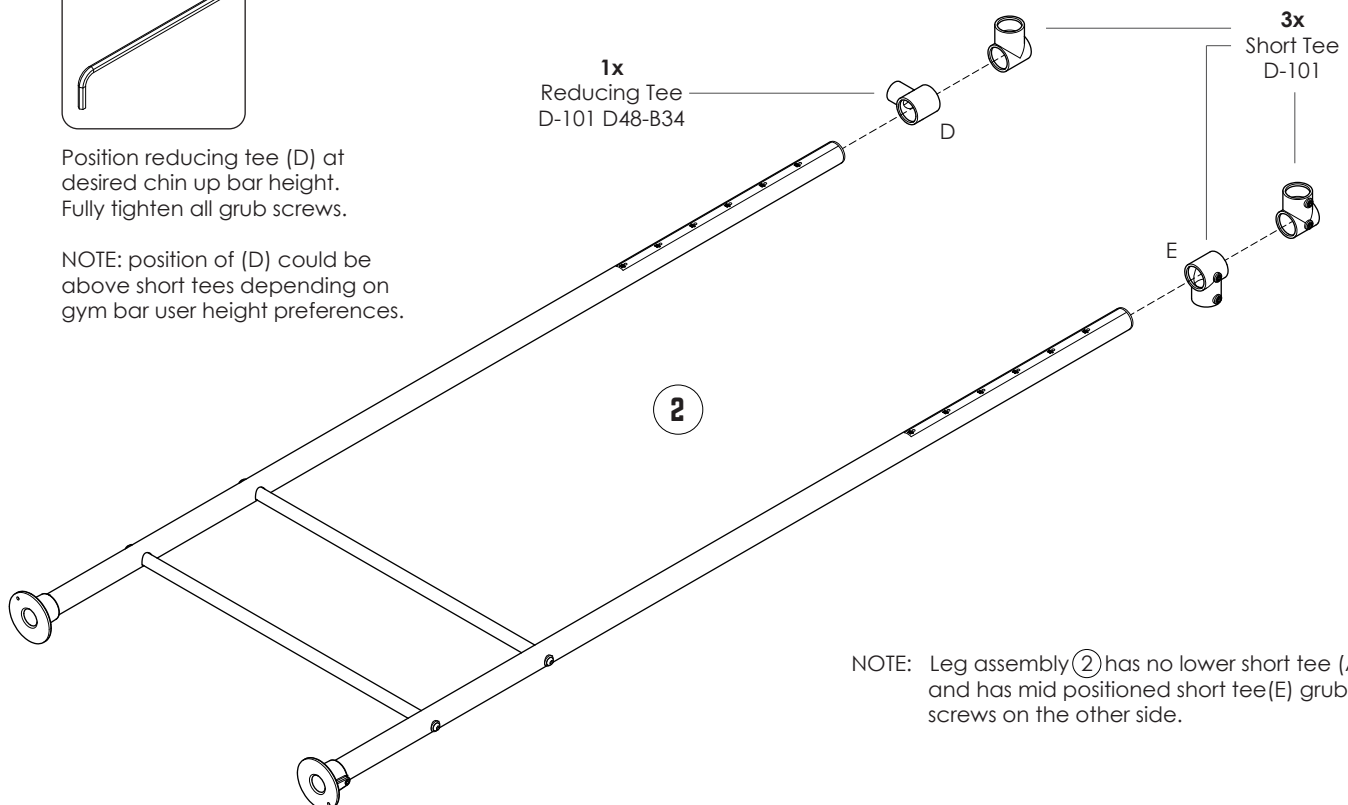


NOTE: Leg assembly ② has no lower short tee (A)
and has mid positioned short tee (E) grub
screws on the other side.



14 LEG ASSEMBLY X2.



Leg assembly 2 is turned 180° to face leg assembly 1. Tighten all grub screws.

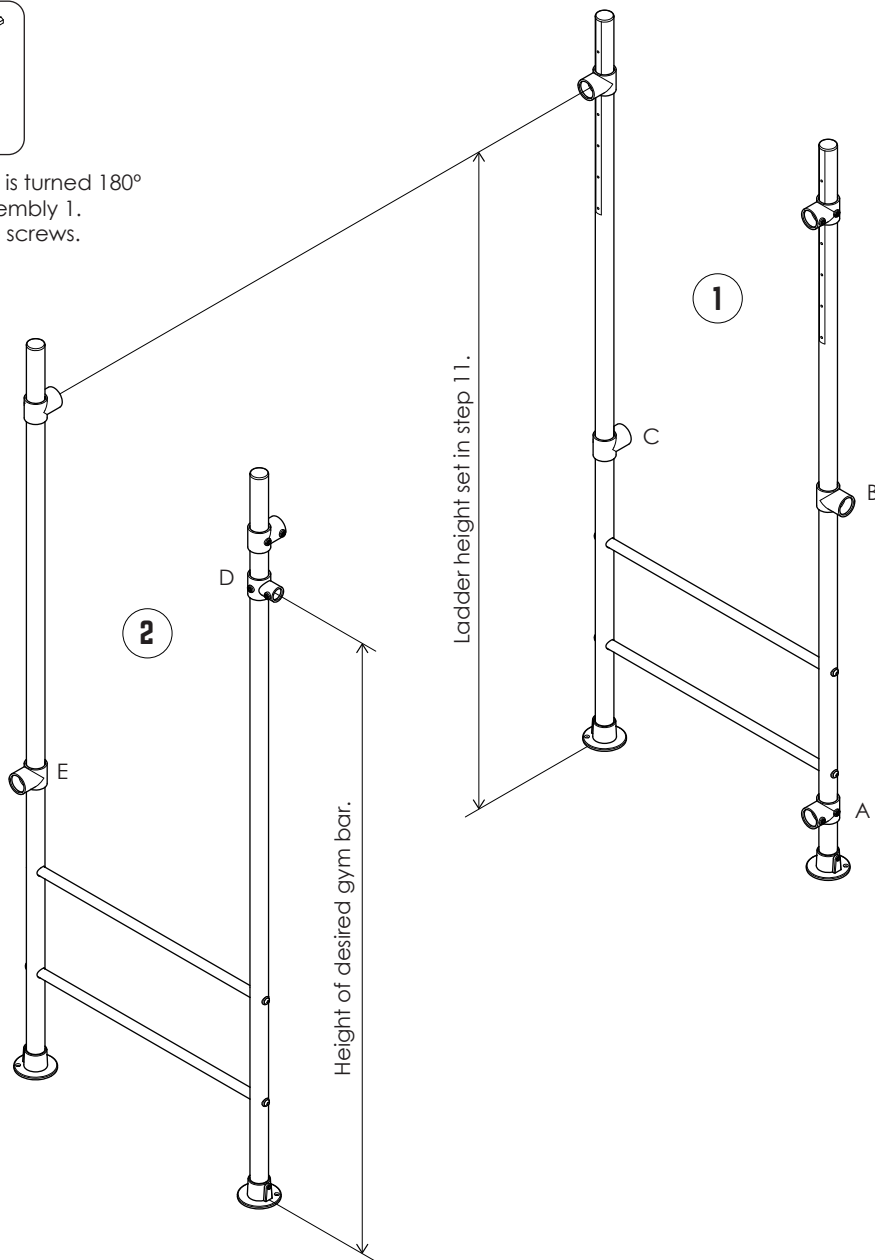


15 CHECK ALL FITTING GRUB SCREWS AND RUNG BOLTS ARE FULLY TIGHTENED





Firmly tighten all grub screws and bolts, Leave short tees B,C & E hand tight for later adjustment.

ASSEMBLY INSTRUCTIONS - TWIRLY WHIRLY BAR ASSEMBLY

16 ASSEMBLE VERTICAL TWIRLY TUBE






Tighten all grub screws.

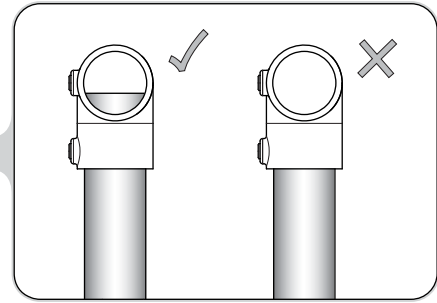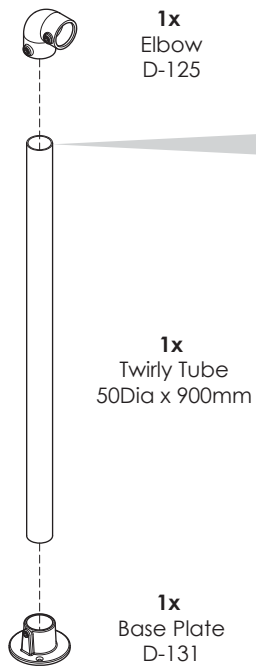

Insert Twirly Tube fully into Elbow.


17 ATTACH HORIZONTAL TWIRLY TUBE

Fully insert twirly tube then firmly tighten all grub screws.

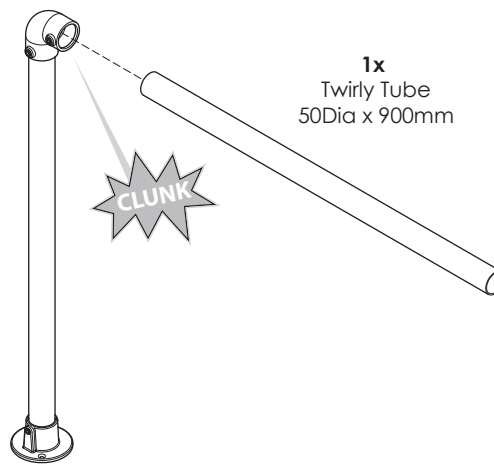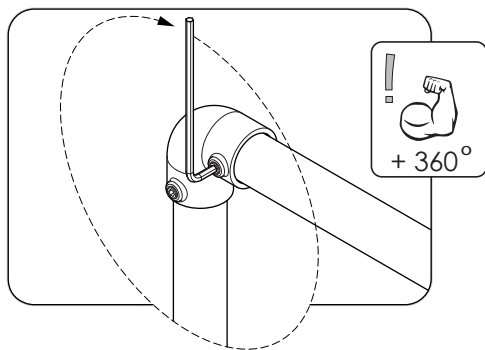


18 REPEAT STEPS 16 - 18 FOR 3 MORE TWIRLY WHIRLY BARS.

19 TWIRLY WHIRLY BAR x4

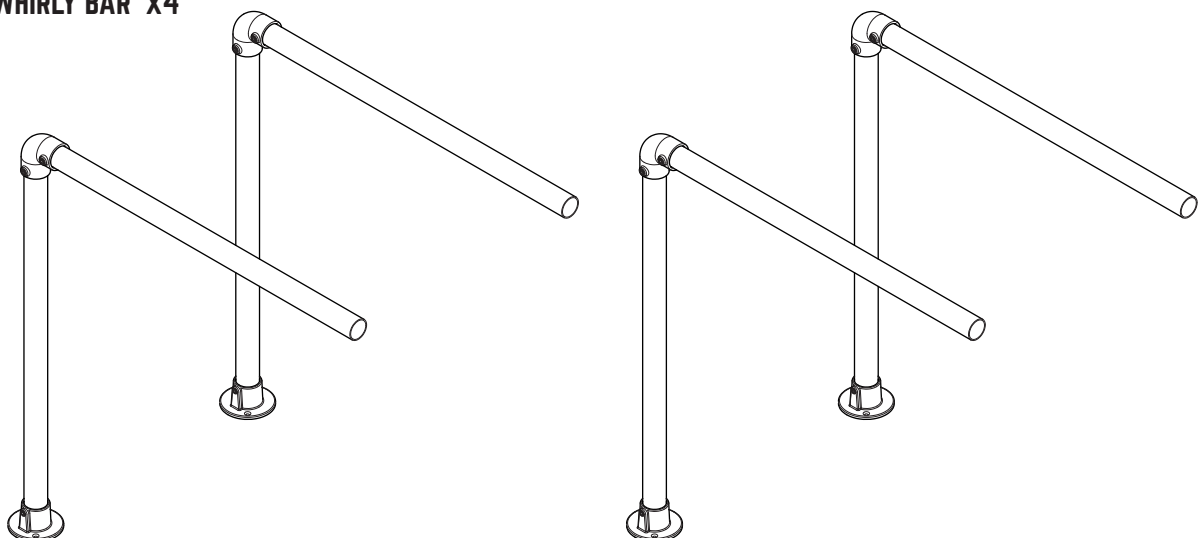


ASSEMBLY INSTRUCTIONS - MAIN MONKEY BAR ASSEMBLY



20 FLIP LEGS 1 & 2 OVER




For the following step the legs should be flipped over & attached one at a time.

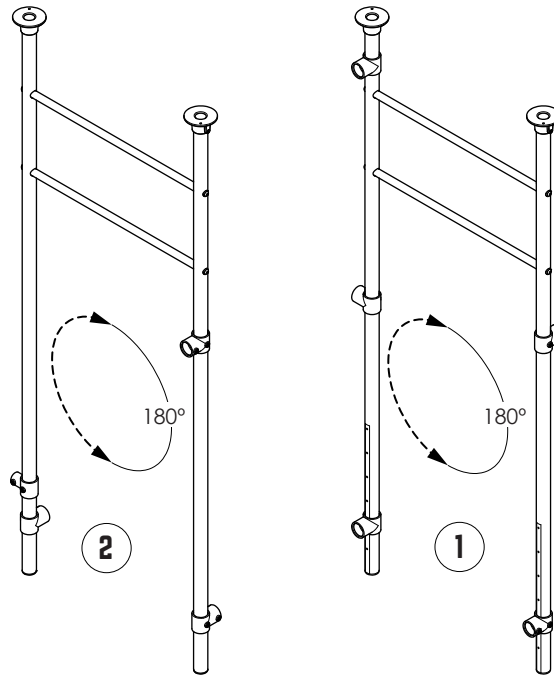





21 ATTACH 2x LEGS TO LADDER



1. Attach first set of legs ① - tighten all grub screws.
2. Attach second set of legs ② - tighten all grub screws.

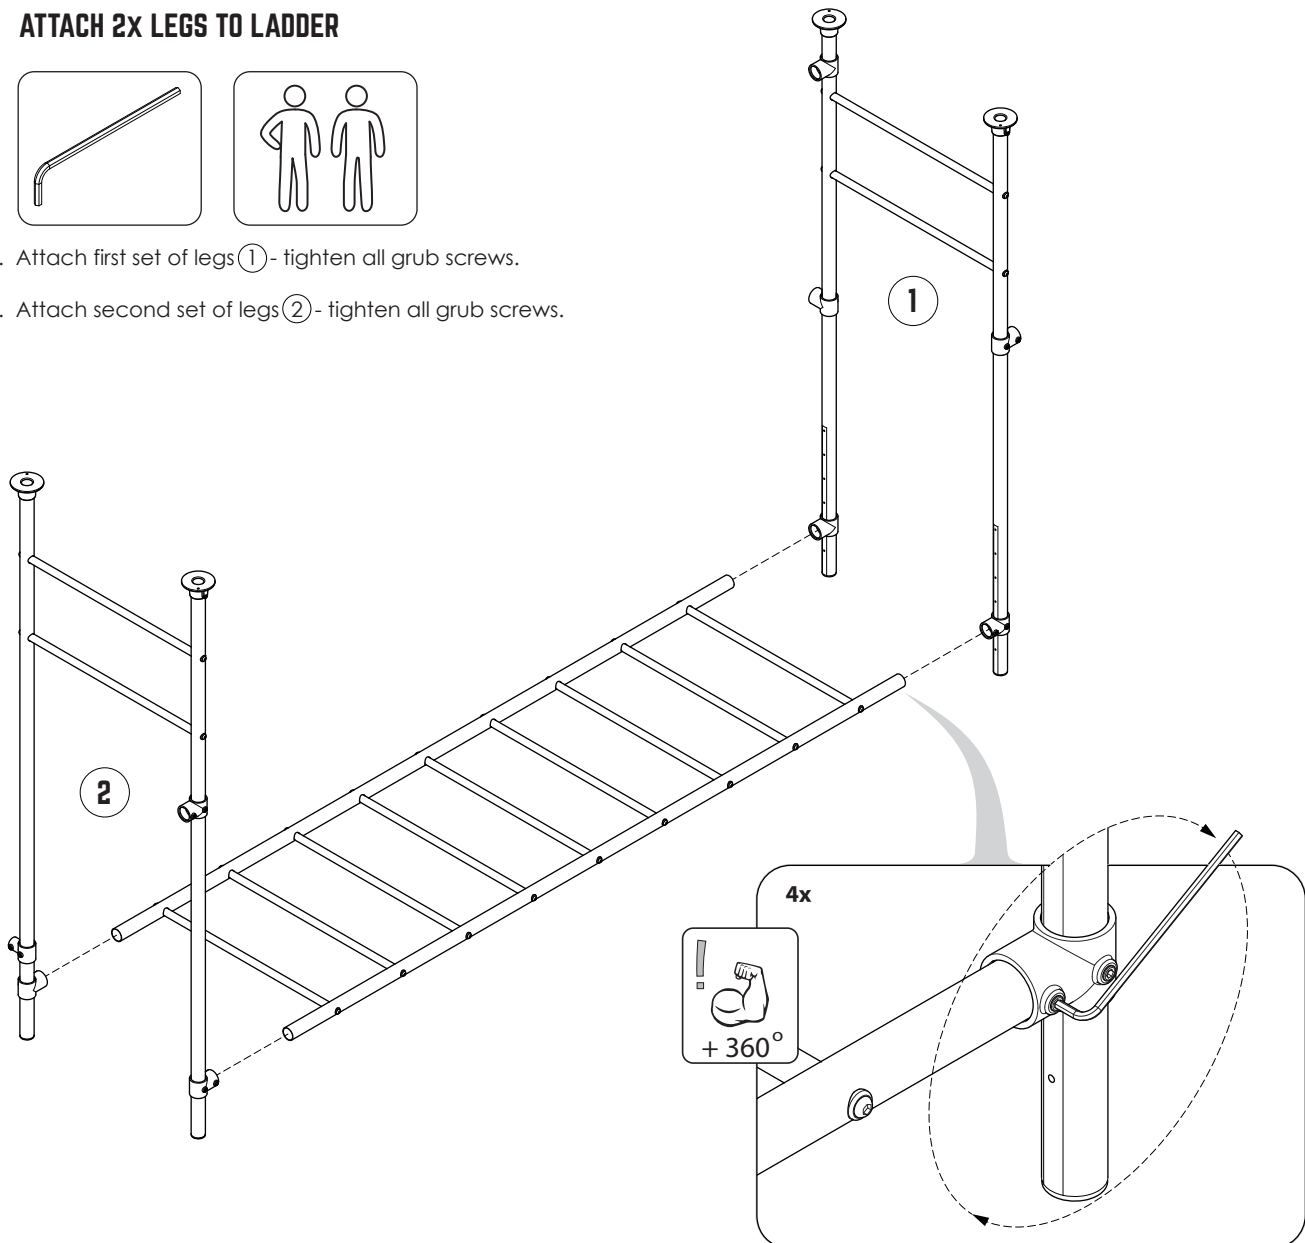


22 FLIP ASSEMBLY OVER

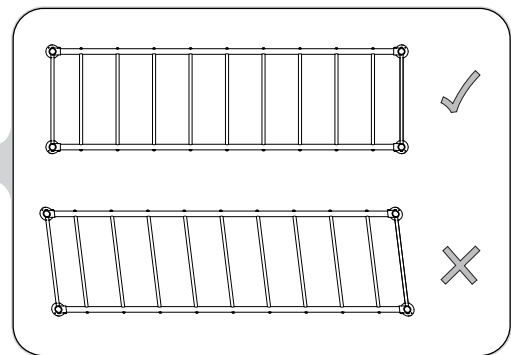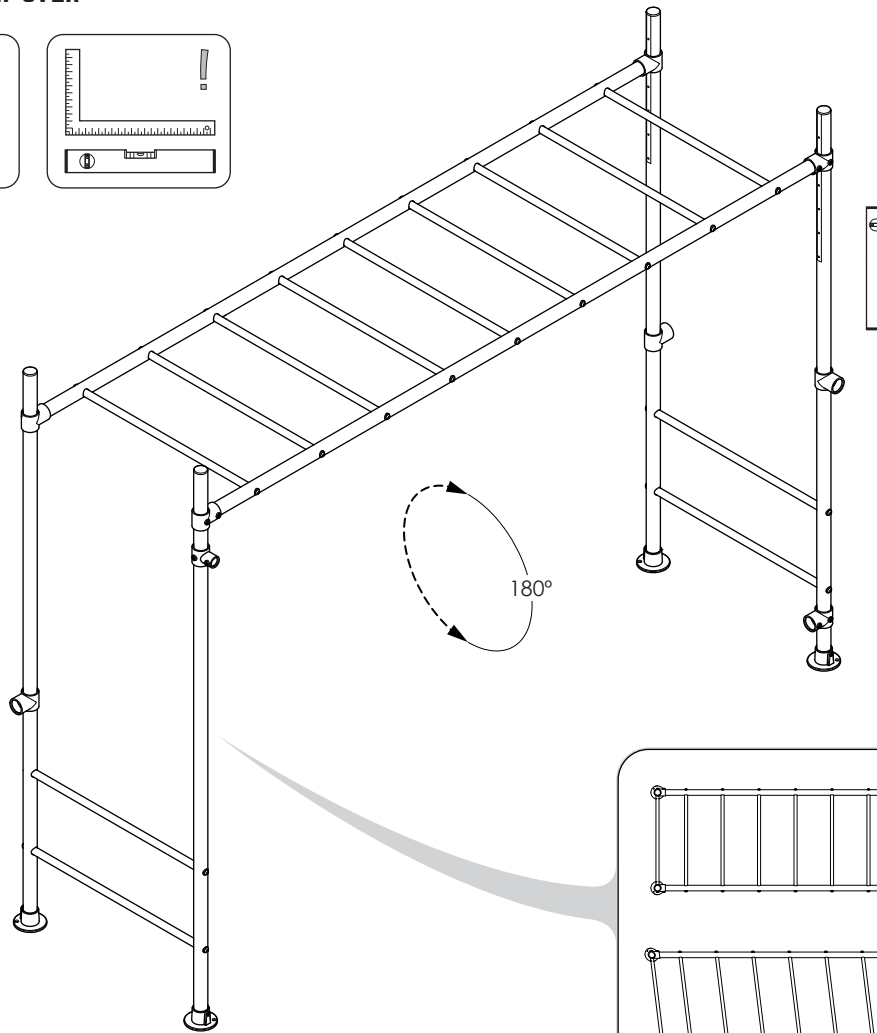



CRITICAL : ENSURE YOUR FRAME IS 100% SQUARE AND LEVEL (AS PER PAGE 6) BEFORE MOVING ONTO THE REST OF THE ASSEMBLY


23 SECURE TO GROUND




Select suitable location.
Hammer in pegs x4.

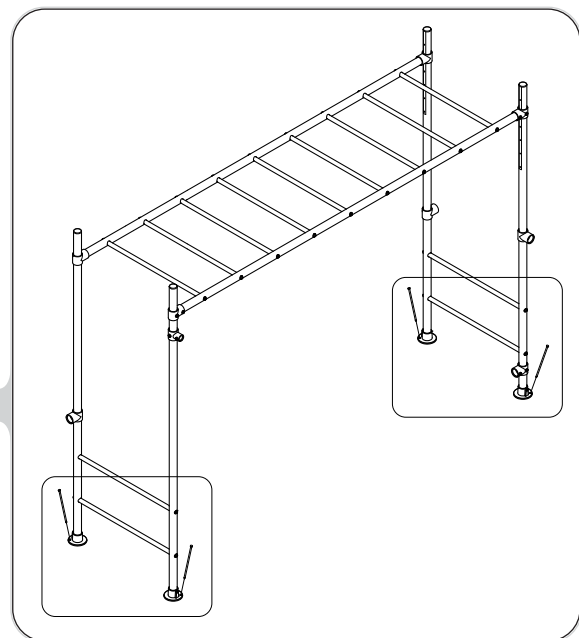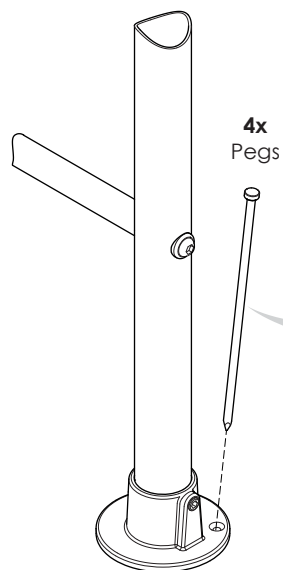


24 ASSEMBLE DIP STATION LEGS




1. Fit short tees at same height as leg short tee (A) in step 8.
2. Fully insert elbows and base plates, then fully tighten all grub screws.

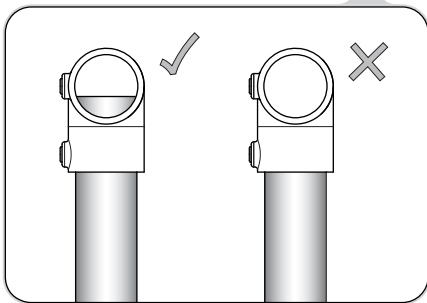


Insert Twirly Tube fully into Elbow.

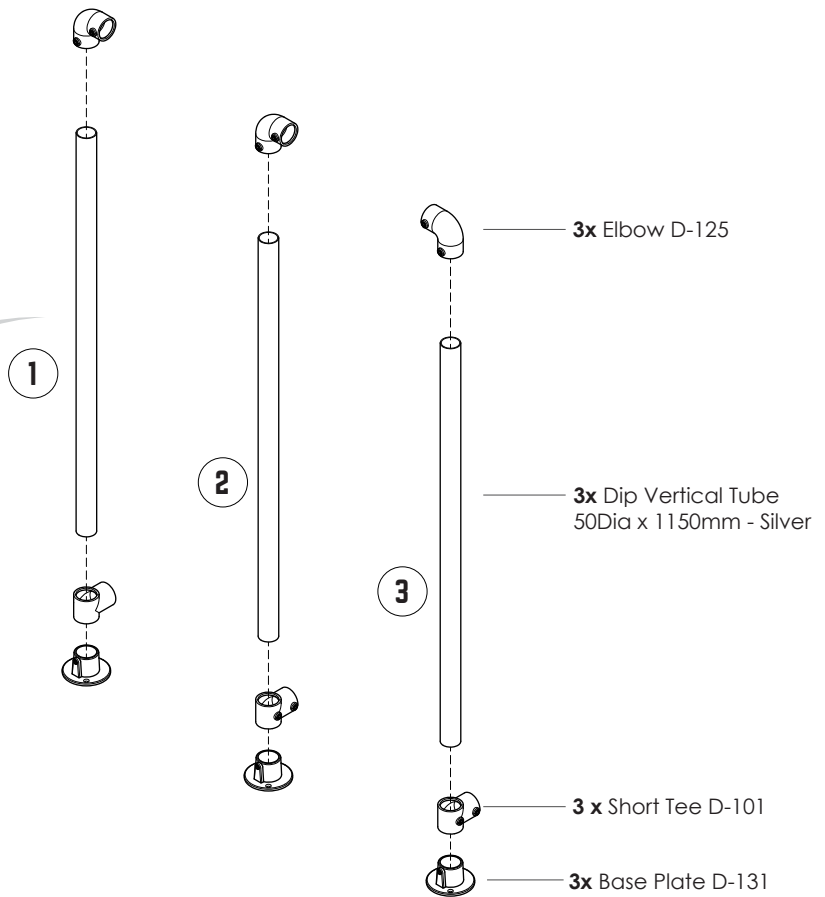


25 ATTACH DIP STATION LEG 1 & DIP BAR




Fully insert all fixings.
Adjust height of short tee
on leg & check it is
level and square.

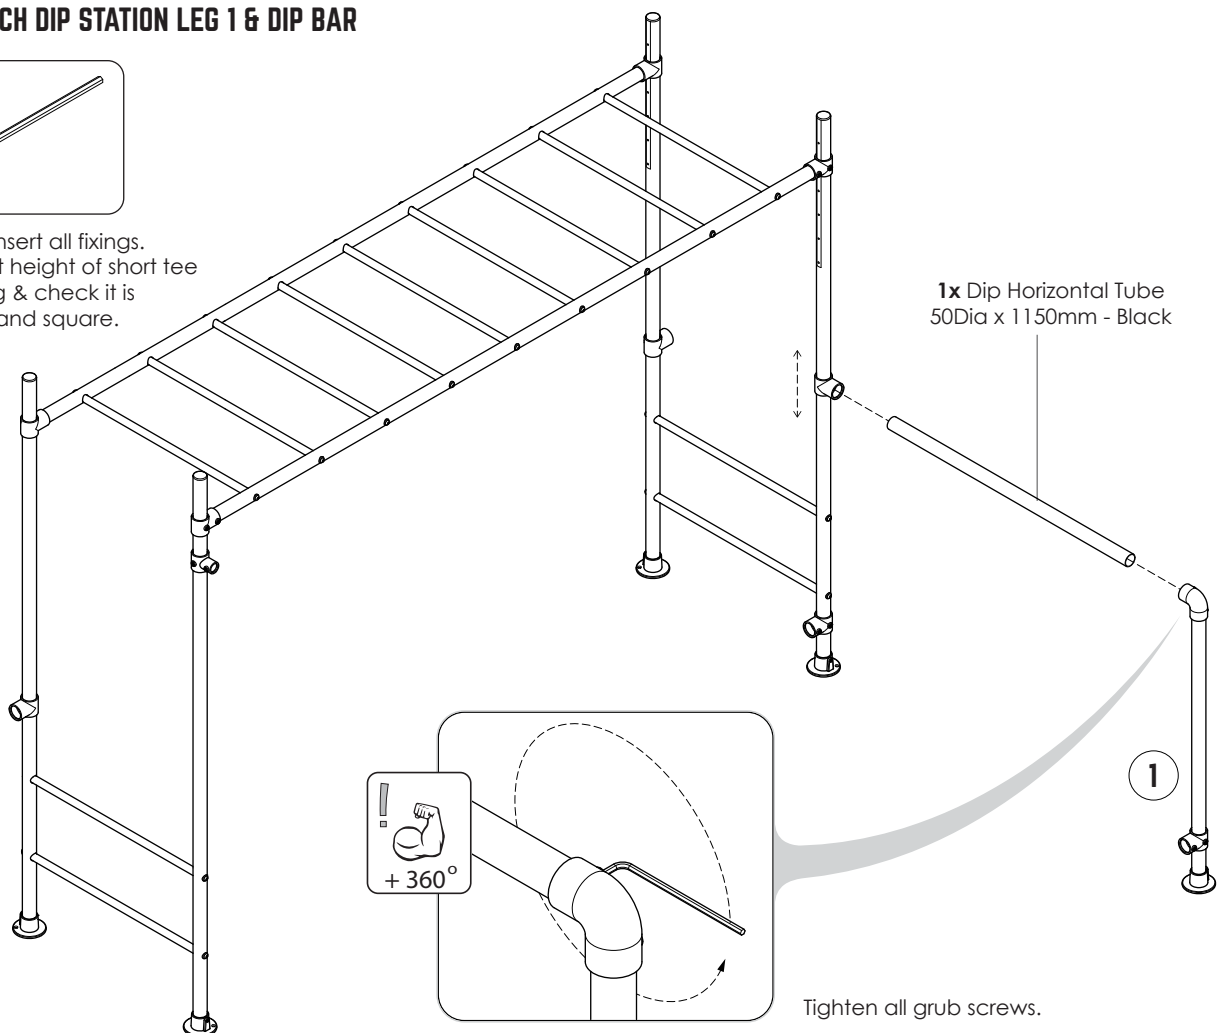


26 ASSEMBLE OTHER DIP STATION SIDE




On flat level ground insert brace and black dip tubes into dip station legs 2&3. Firmly tighten all grub screws.

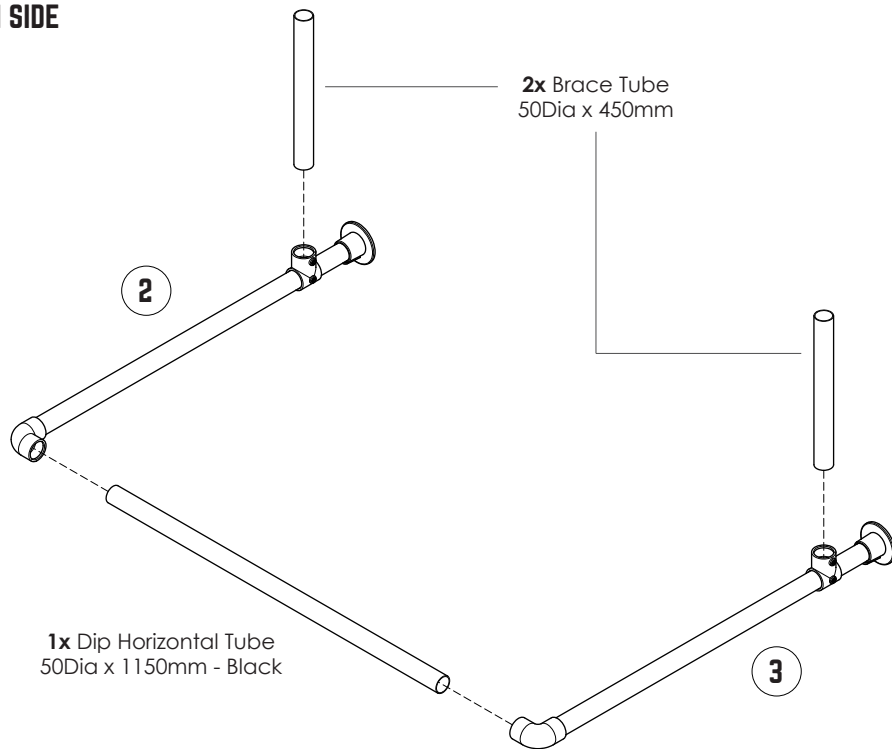

27 ATTACH OTHER DIP STATION SIDE




Insert brace tubes into short tees and fully tighten all grub screws on dip station.

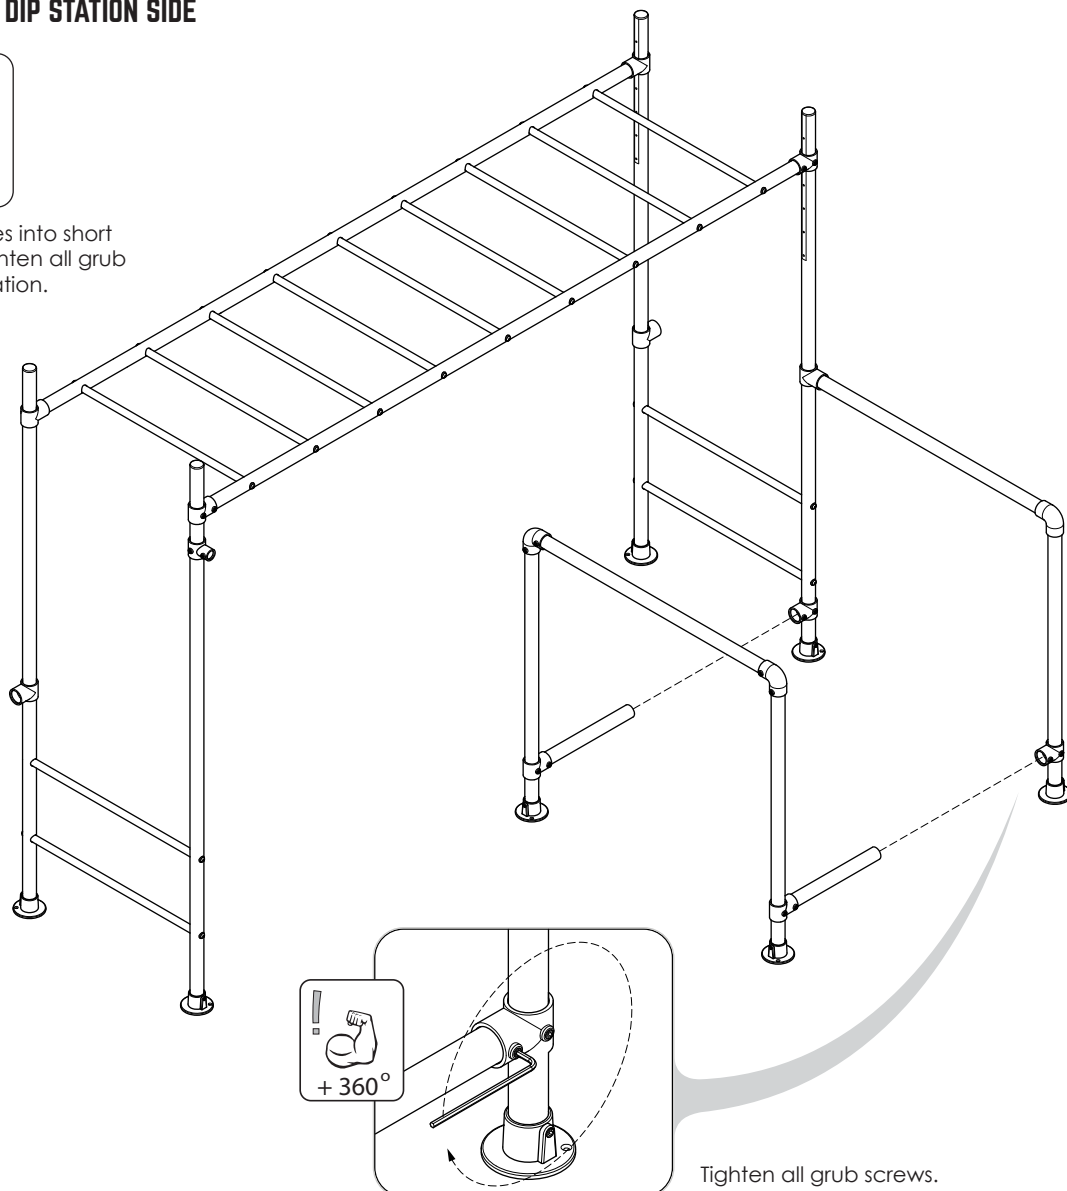



ASSEMBLY INSTRUCTIONS - GYM BAR ASSEMBLY

28 ASSEMBLE GYM BAR

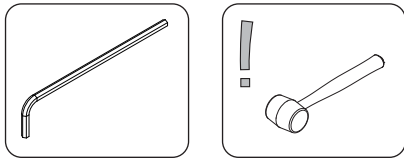


On flat level ground slide fittings onto gym leg tube. Ensure reducing tee is same height as on main frame, then fully insert chin up tube. Tap in end cap. Fully tighten all grub screws.


Ensure 4 hole base plate.

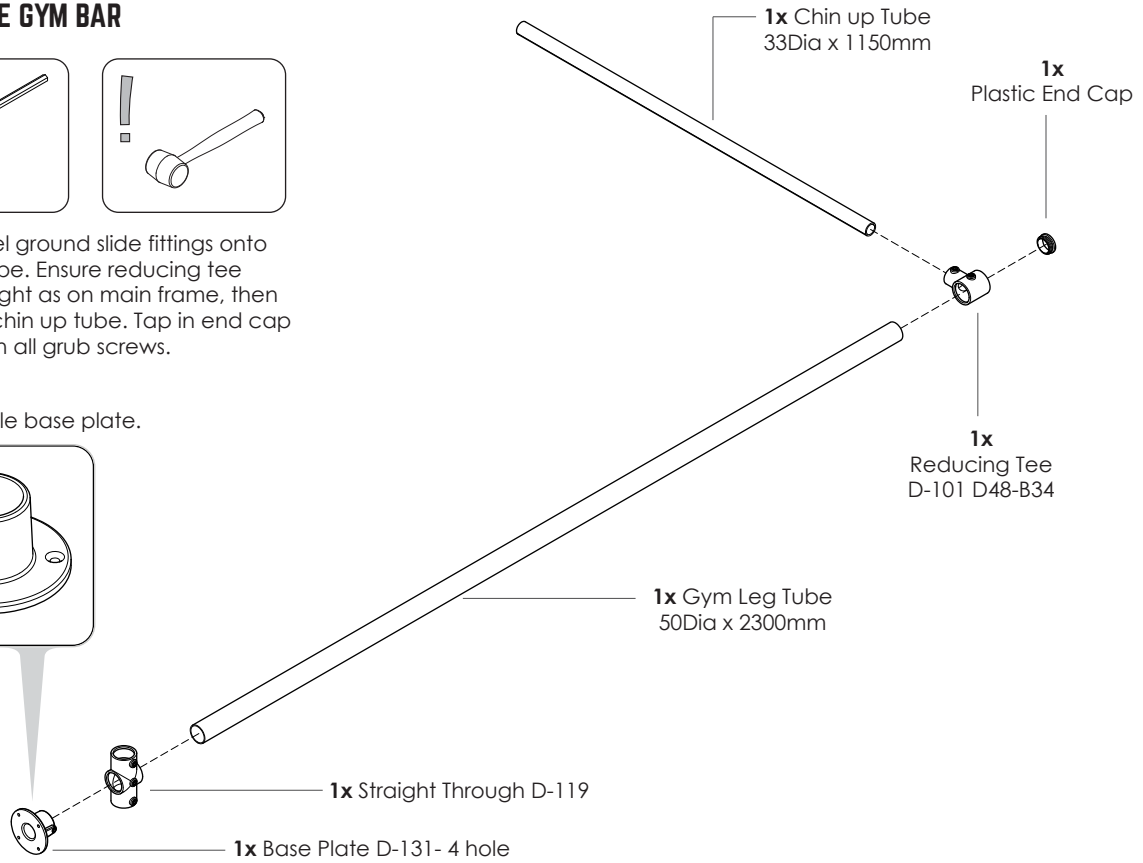


29 ATTACH GYM BAR





Insert gym bar tube into the reducing tee on the main monkey bar leg. Ensure gym bar is level and fully tighten all fixings.





Tighten all grub screws.

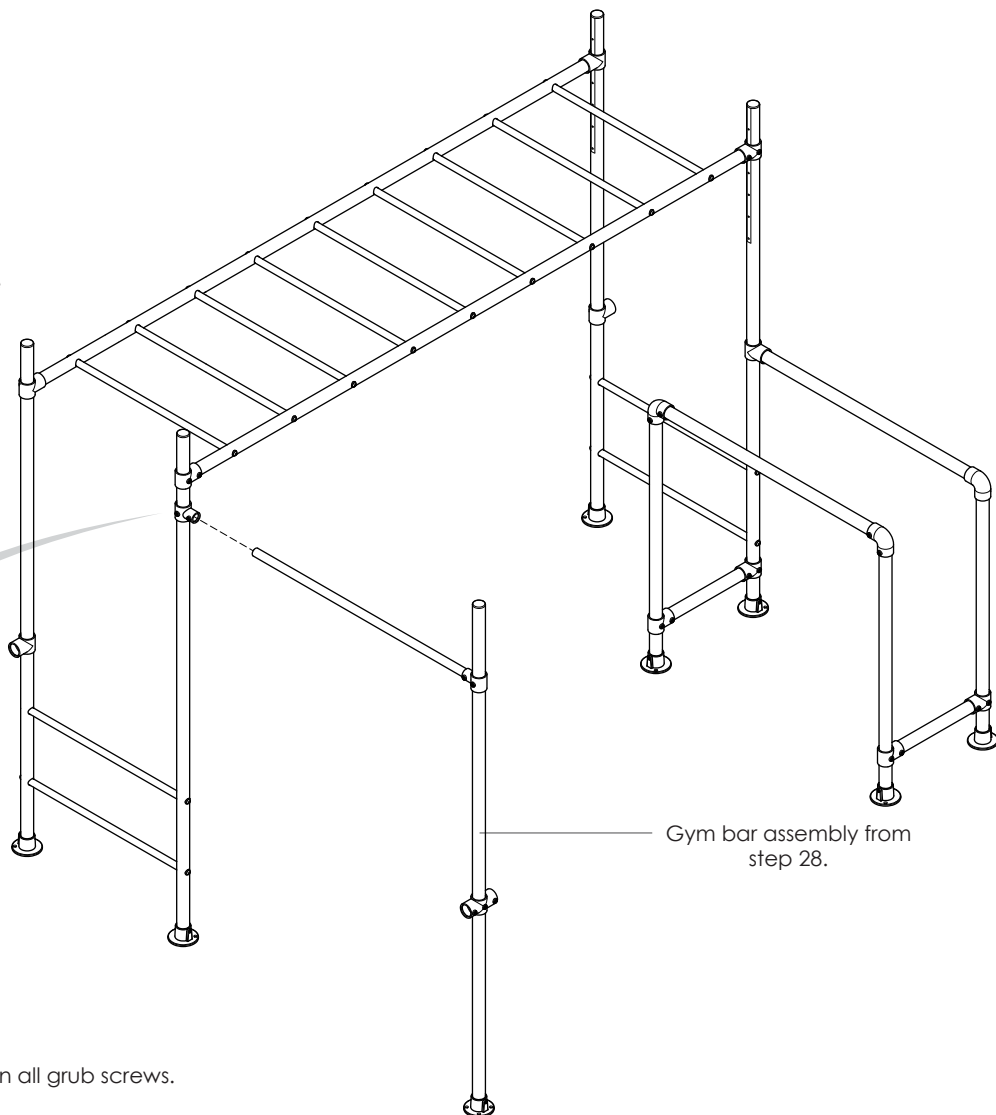


30 SECURE TO GROUND



1. Check level and square - Loosen and adjust if not.
2. Hammer in pegs 7x.
3. Check all fixings are fully tight.

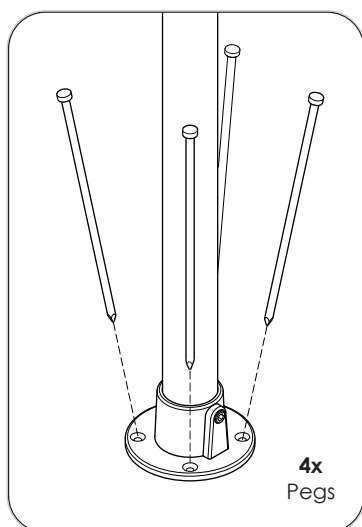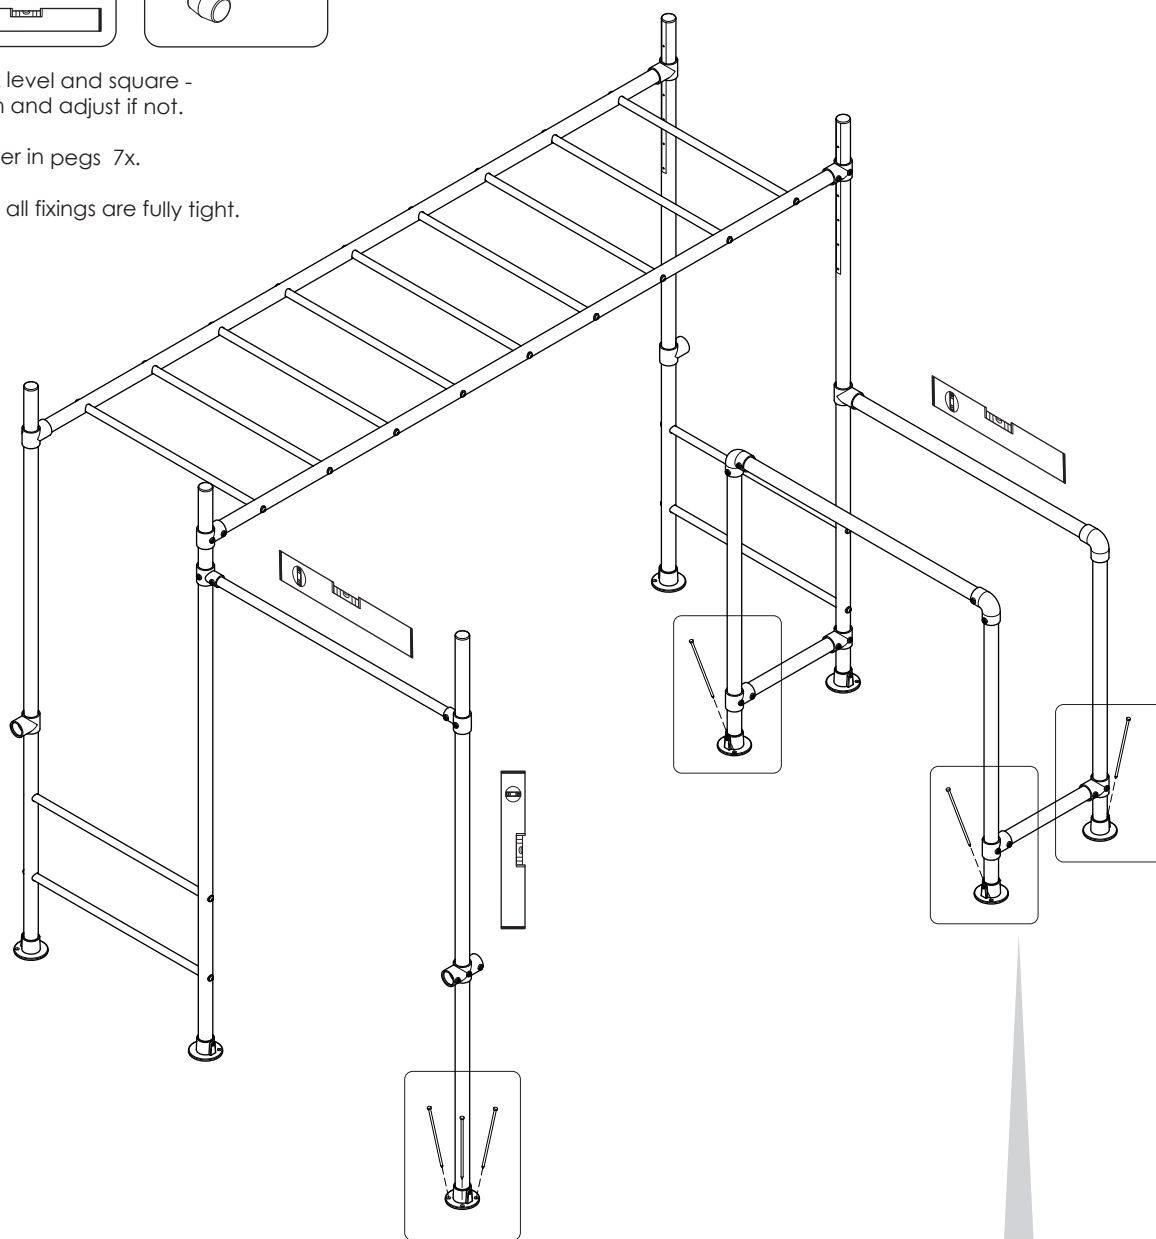


Four pegs for gym bar base plate.

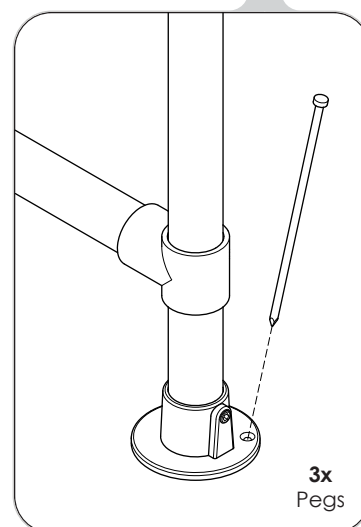


Single pegs for dip station base plates.


31 ATTACH TWIRLY WHIRLY BARS X4



1. Adjust short tees to align level with twirly whirly bars
2. Tighten all grub screws fixing twirly whirlys to legs.

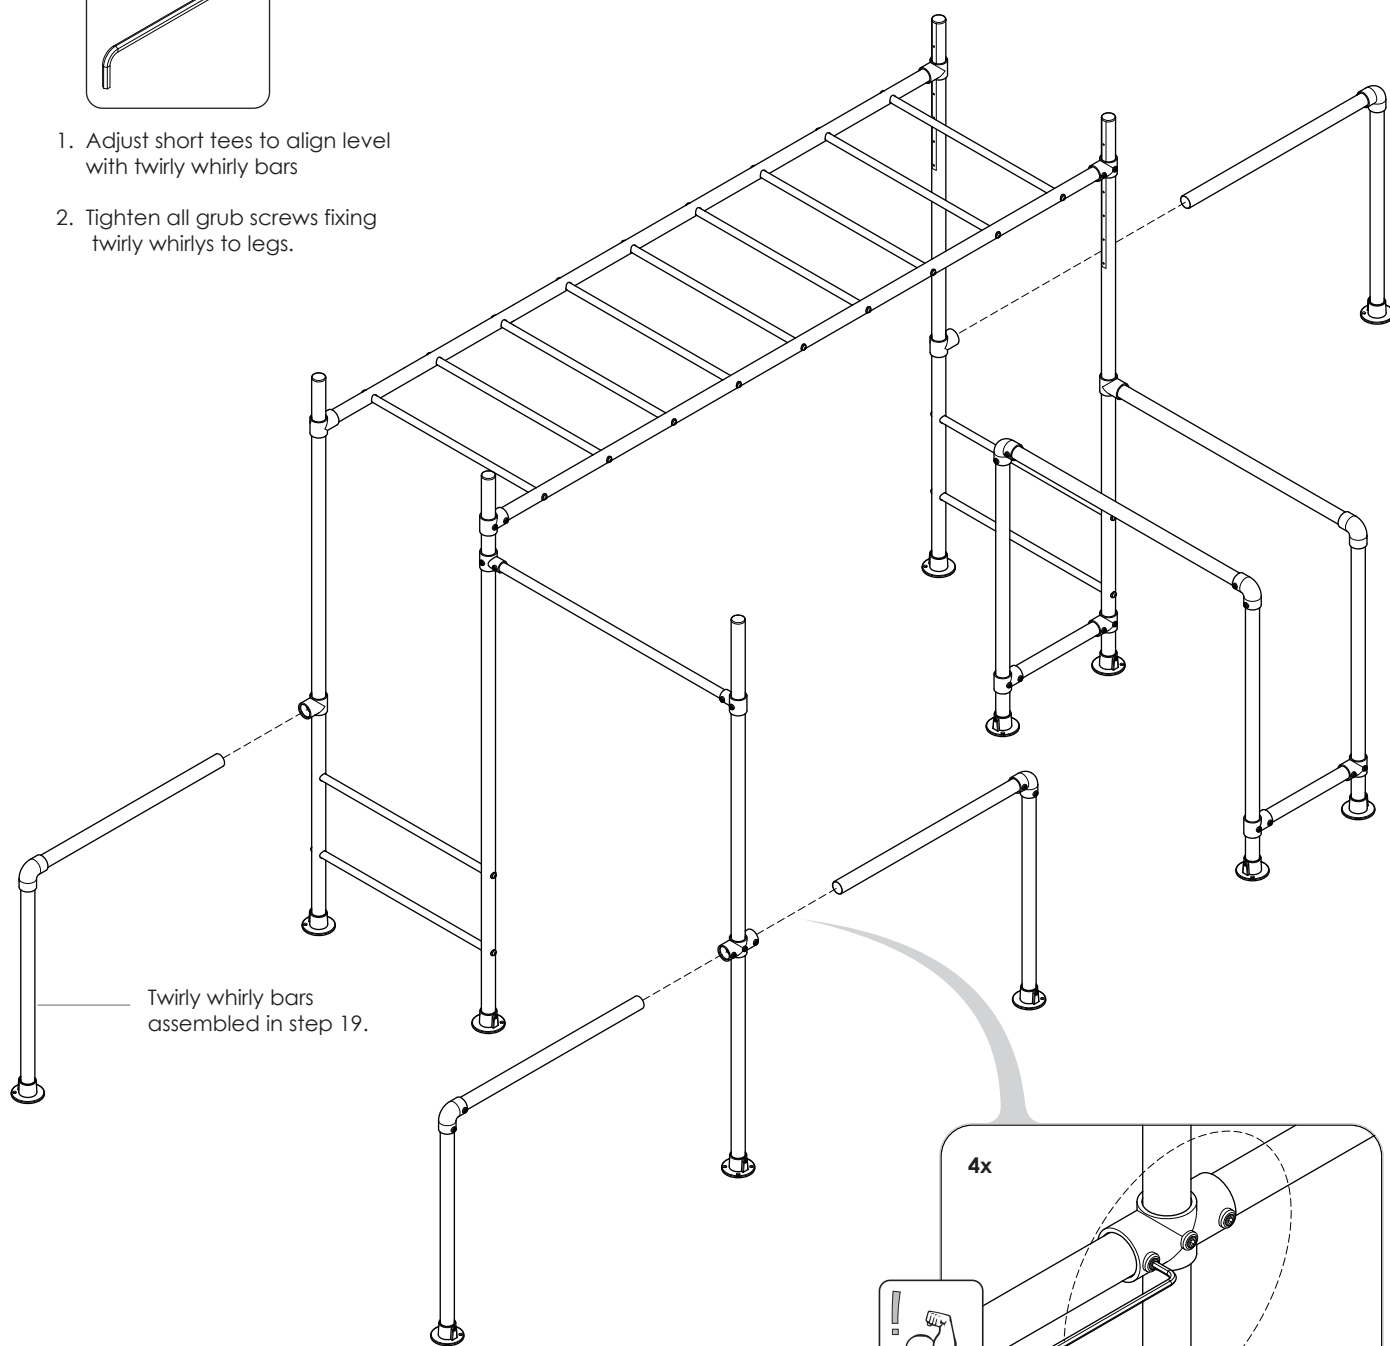

Twirly whirly bars assembled in step 19.


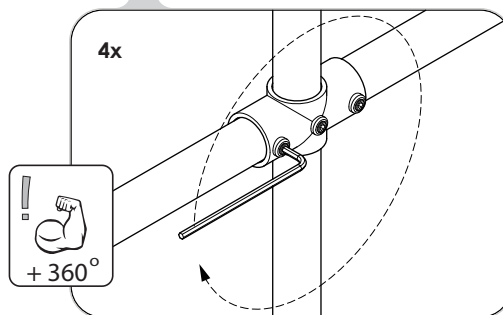


4x

+ 360°

Tighten all grub screws.


32 CHECK ALL FITTING GRUB SCREWS ARE FULLY TIGHTENED




1. Ensure frame is square and level.
2. Firmly tighten all grub screws and bolts.

ASSEMBLY INSTRUCTIONS - LOAD TWIRLY WHIRLY BARS

33 LOAD YOUR TWIRLY WHIRLY BARS x4


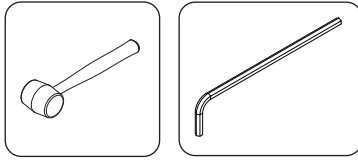


To reduce movement in your frame load your twirly whirly bars as follows.

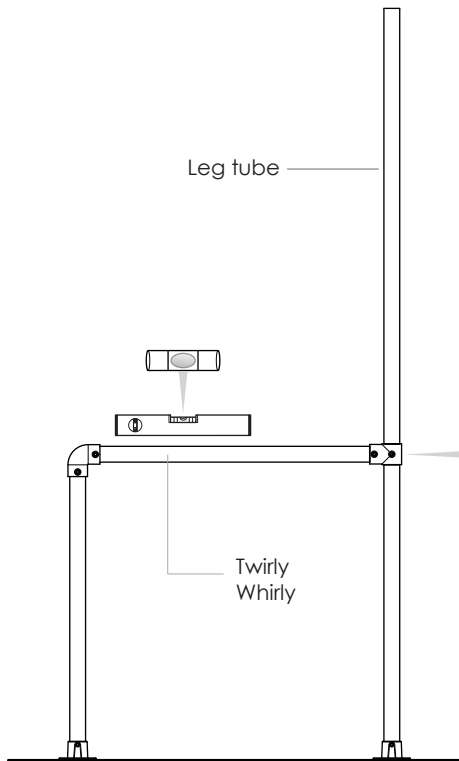


1. Ensure twirly whirly is level and square & leg tube is pegged down.


2. Loosen the grub screw fixing the short tee to the leg tube.

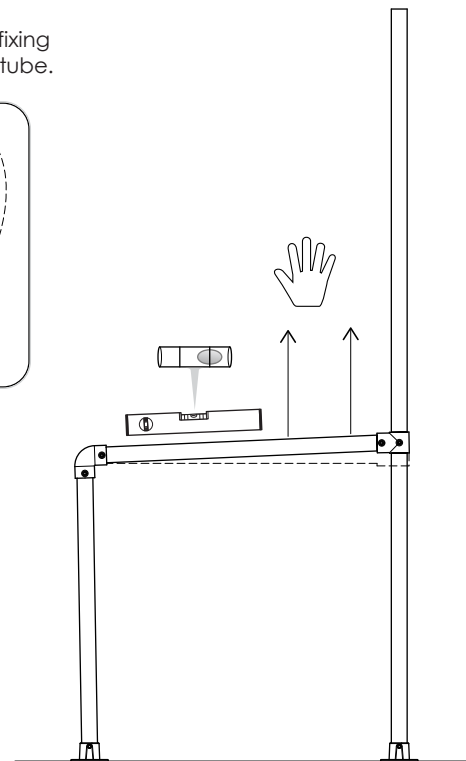


3. Pull upwards on the twirly whirly bar to make a slight angle. (Half a bubble off center on the level)



4. Peg down base plates on twirly whirly.

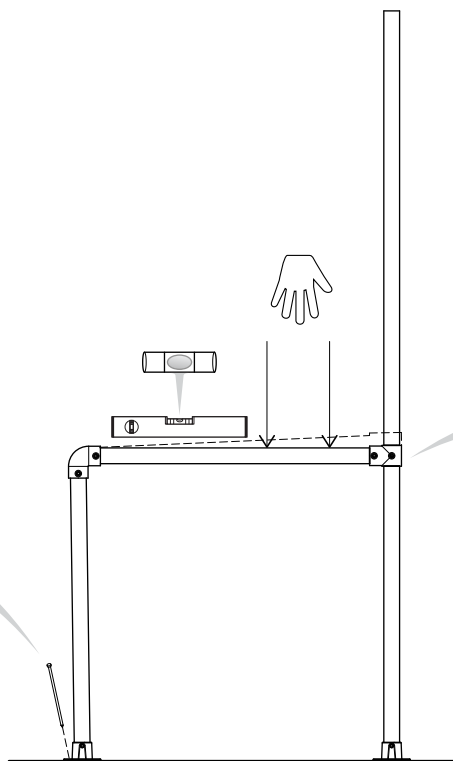


5. Push down on the twirly whirly bar until horizontal bar is level.

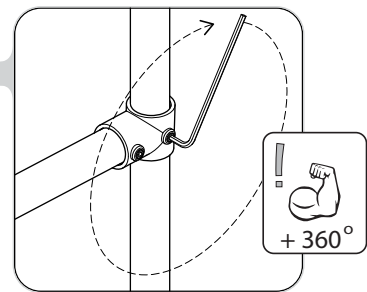


6. Tighten grub screw fixing the short tee to the leg tube. Apply to all twirly whirls.

REFER TO VIDEO SECTION OF WEBSITE [HTTP://WWW.FUNKYMONKEYBARS.COM/PAGES/VIDEOS](http://www.funkymonkeybars.com/pages/videos)



34 ATTACH ACCESSORIES (NONE SUPPLIED WITH TAMARIN)



Attach any new accessories in desired position (if applicable) and tighten any swing hook bolts with ratchet.

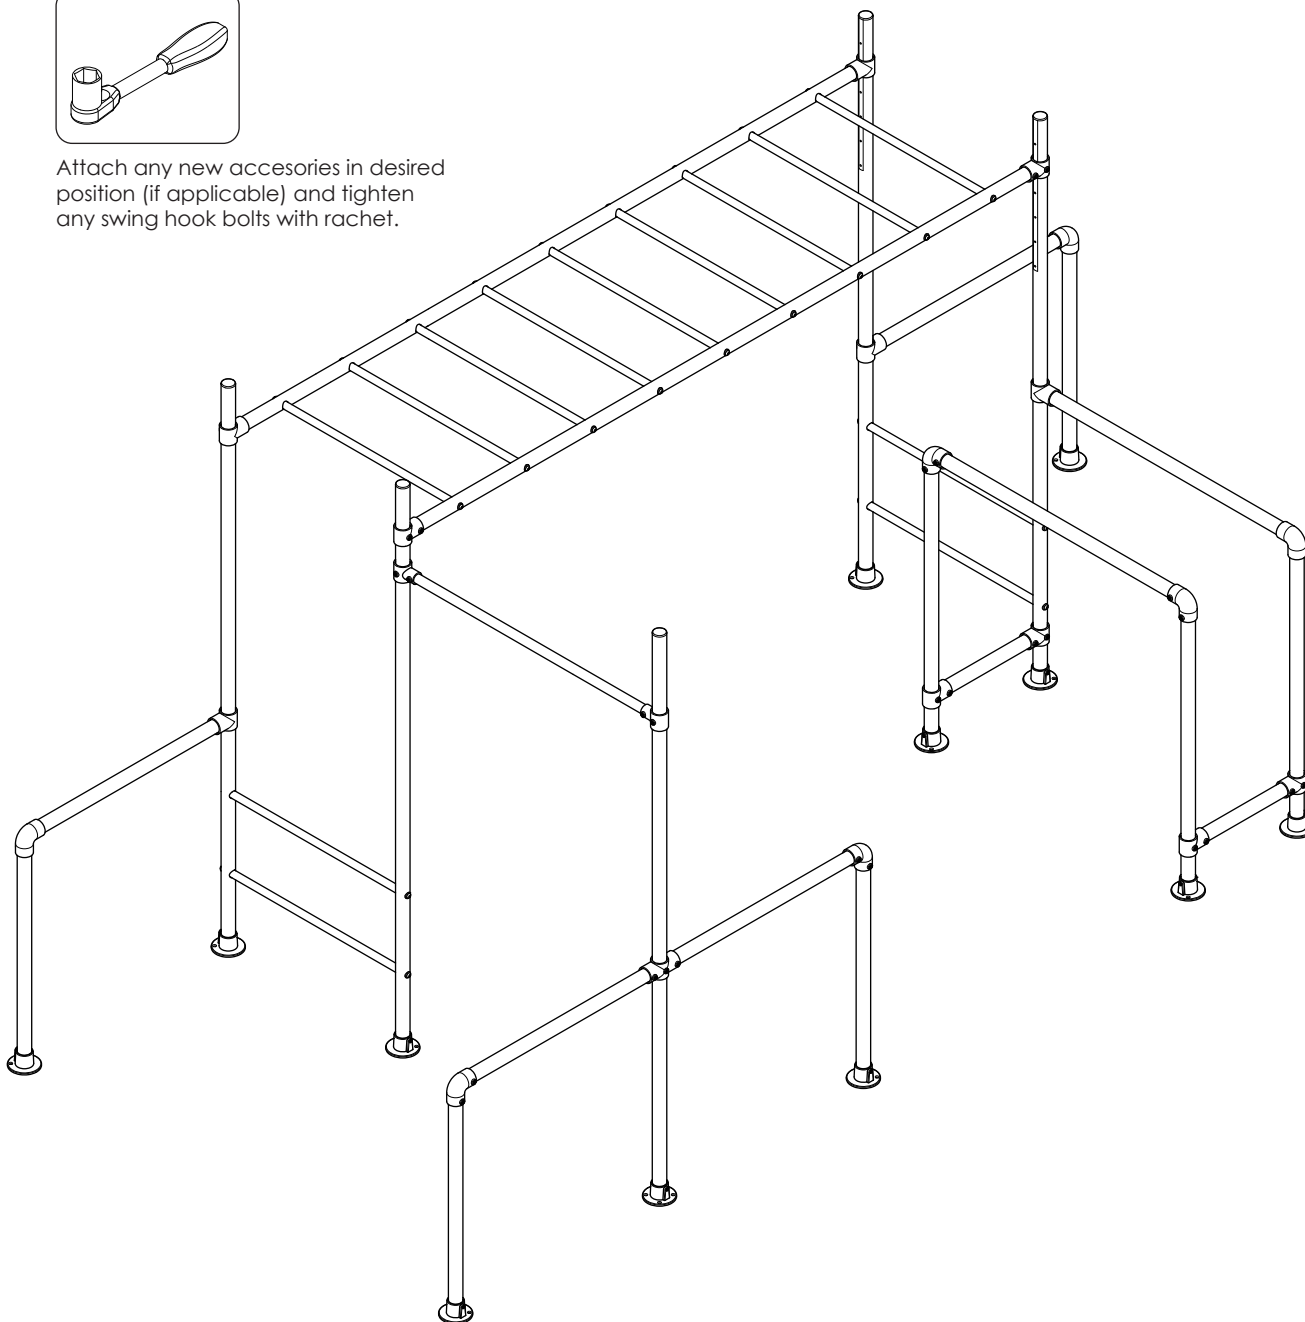


35 FINAL CHECKS





1. Ensure frame is square and level.
2. Firmly tighten all grub screws and bolts.
3. All base plates are pegged down.

Apply your manufacturing sticker to a leg tube.



36 MAINTENANCE.



At the beginning of each heavy play session (especially a party) and twice a month during play season ensure;

1. Tighten all hardware - grub screws, nuts and bolts.
2. Pegs are in place and fully secure.
3. Lubricate all metallic moving parts with WD40 or Vaseline - (trolley and swing hooks.)
4. Ensure your frame is level and square.

FAILURE TO DO SO COULD RESULT IN SERIOUS INJURY OR DEATH.


**FOR MORE INFORMATION AND ASSEMBLY TIPS
PLEASE REFER TO OUR WEBSITE VIDEO INSTRUCTION SECTION AT
[HTTP://WWW.FUNKYMONKEYBARS.COM/PAGES/VIDEOS](http://www.funkymonkeybars.com/pages/videos)**

37 HAVE FUN





ABN 72 164 496 520

 1300 912 198

 info@funkymonkeybars.com

 www.funkymonkeybars.com

 9 Cutting Way,
Yangebup WA 6164



WE ARE SOCIAL MONKEYS



Australian Government
IP Australia

All Funky Monkey Bars® designs are registered and protected under IP Australian certification.