

PRESIDENT

WALKER III FCC AM FM



VOX built in



«SCAN SKIP»

7 COLOR DISPLAY



Engineered to be the very best

- AM/FM • USB charging socket • Roger Beep • Dimmer
- RF Gain • Mic Gain • RF Power • PA (Public Address) • Scan
- Scan Skip • Key Beep • Frequency display • Vox • Tone
- 2 programmable priority channels • Talkback function
- Weather channel • Alert • ANL, NB and Hi-Cut filters
- Electret / dynamic microphone compatible...


*See warranty conditions on our website: www.president-electronics.us

Group
PRESIDENT
ELECTRONICS USA

2197/06-22

HEAD OFFICE: USA - 1007 Collier Center Way, Naples, Florida 34110
Web: <http://www.president-electronics.us> • Phone: +1 239.302.3100
Email: info@president-electronics.us



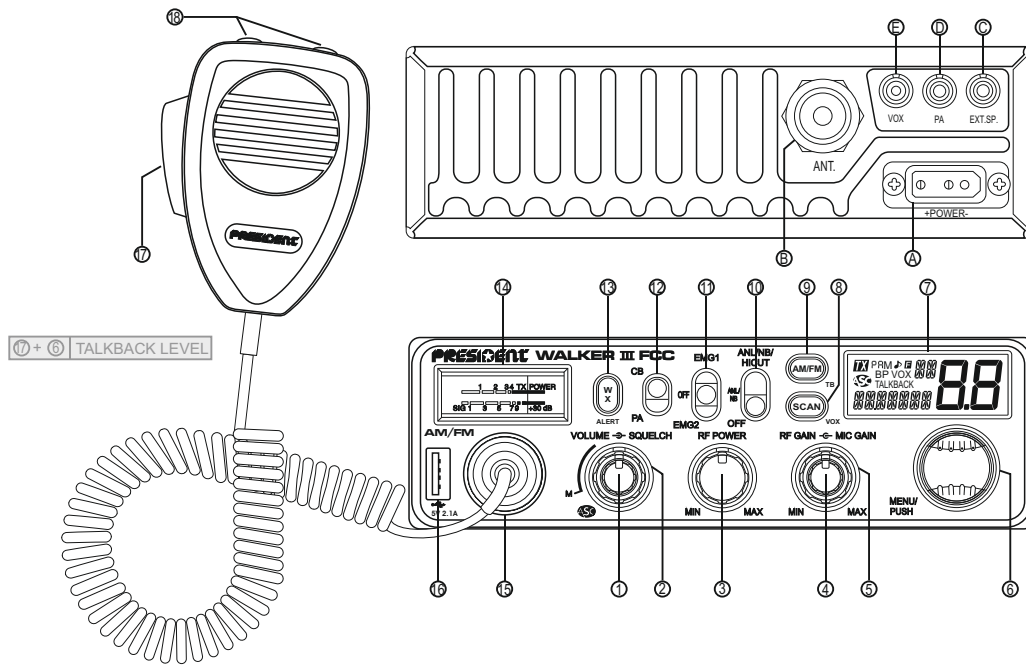

MENU

- 1) COLOR
- 2) DIMMER
- 3) KEY BEEP
- 4) ROGER BEEP
- 5) TONE
- 6) EMG SET 1
- 7) EMG SET 2
- 8) VOX SET
- 9) SWR ADJUSTMENT
- 10) MIC TYPE
- 11) PA SETTING
- 12) SCAN SKIP
- 13) RESET

FUNCTION WITH PTT SWITCH

- 1) TALKBACK LEVEL

- | | |
|--|--|
| <ol style="list-style-type: none"> 1) ON/OFF ~ VOLUME 2) ASC (Automatic Squelch Control) ~ SQUELCH 3) RF POWER 4) MIC GAIN 5) RF GAIN 6) ROTARY "PUSH" KNOB 7) LCD 8) SCAN ~ SKIP ~ VOX 9) AM/FM ~ TALKBACK 10) NB/ANL - HIC FILTERS 11) PRIORITY CHANNELS 12) CB/PA | <ol style="list-style-type: none"> 13) WX MODE ~ ALERT 14) BARGRAPH 15) 6 PIN MICROPHONE PLUG 16) USB CHARGING SOCKET 17) PTT 18) UP/DN BUTTONS ON MICROPHONE <p>A) DC-POWER TERMINAL (13,8 V)
 B) ANTENNA CONNECTOR (SO-239)
 C) JACK FOR EXTERNAL OPTIONAL SPEAKER (8 Ω, Ø 3.5 mm)
 D) JACK FOR PA OPTIONAL SPEAKER (Public Address) (8 Ω, Ø 3.5 mm)
 E) JACK FOR OPTIONAL VOX MICROPHONE (Ø 2.5 mm)</p> |
|--|--|

1) GENERAL

- Channels : 40
- Modulation modes : AM/FM
- Frequency range : from 26.965 MHz to 27.405 MHz
- Weather channels : from 162,400 MHz to 162,550 MHz
- Antenna impedance : 50 ohms
- Power supply : 13.8 V
- Dimensions : 6.692 (W) x 6.299 (D) x 2.047 (H) inches
: 170 (W) x 160 (D) x 52 (H) mm
- Weight : ± 2.43 lbs / 1.1 kg
- Accessories supplied : 1 microphone electret UP/DOWN with support, mounting cradle, screws and fused power cord.

2) TRANSMISSION

- Frequency allowance : +/- 200 Hz
- Carrier power : 4 WAM / 4 W FM
- Transmission interference : inferior to 4 nW (-54 dBm)
- Audio response : 300 Hz to 3 KHz
- Emitted power in the adj. channel : inferior to 20 μW
- Microphone sensitivity : 3.0 mV
- Drain : < 2 A max. (with modulation)
- Modulated signal distortion : 1,8 %

Specifications

3) RECEPTION

- Maxi. sensitivity at 20 dB sinad : 0.5 μV - 113 dBm - AM
: 0.35 μV - 116 dBm - FM
- Frequency response : 300 Hz to 3 kHz
- Adjacent channel selectivity : 60 dB
- Maximum audio power : 3 W
- Squelch sensitivity : minimum 0.2 μV - 120 dBm
maximum 1 mV - 47 dBm
- Frequency image rejection rate : 60 dB
- Intermediate frequency rejection rate : 70 dB
- Drain : 180 ~ 500 mA maximum

