


Note: Back Board Not Included



Pole shall be constructed of 3 1/2" outside diameter RS40 flow coated galvanized steel tubing with an 8 ga. wall thickness. Design shall be of a straight pole style and allow for a 36" bury into the ground and a straight adjustable extension that allows for a 36" offset from the front of the pole to the face of the backboard. Two 1 5/8" diameter 13 ga. Flow coated galvanized tubular braces shall support the top of the backboard and connect directly to the pole. Pole shall be designed so that the rim mounts directly to the horizontal pole section through the backboard to eliminate stress on the backboard during play. Pole systems without backboard support braces shall not be considered equal. If a pole is already installed order BA776A for extension arm, backboard and braces. Pole shall carry a minimum 10-year limited warranty and shall weigh approximately 125#.

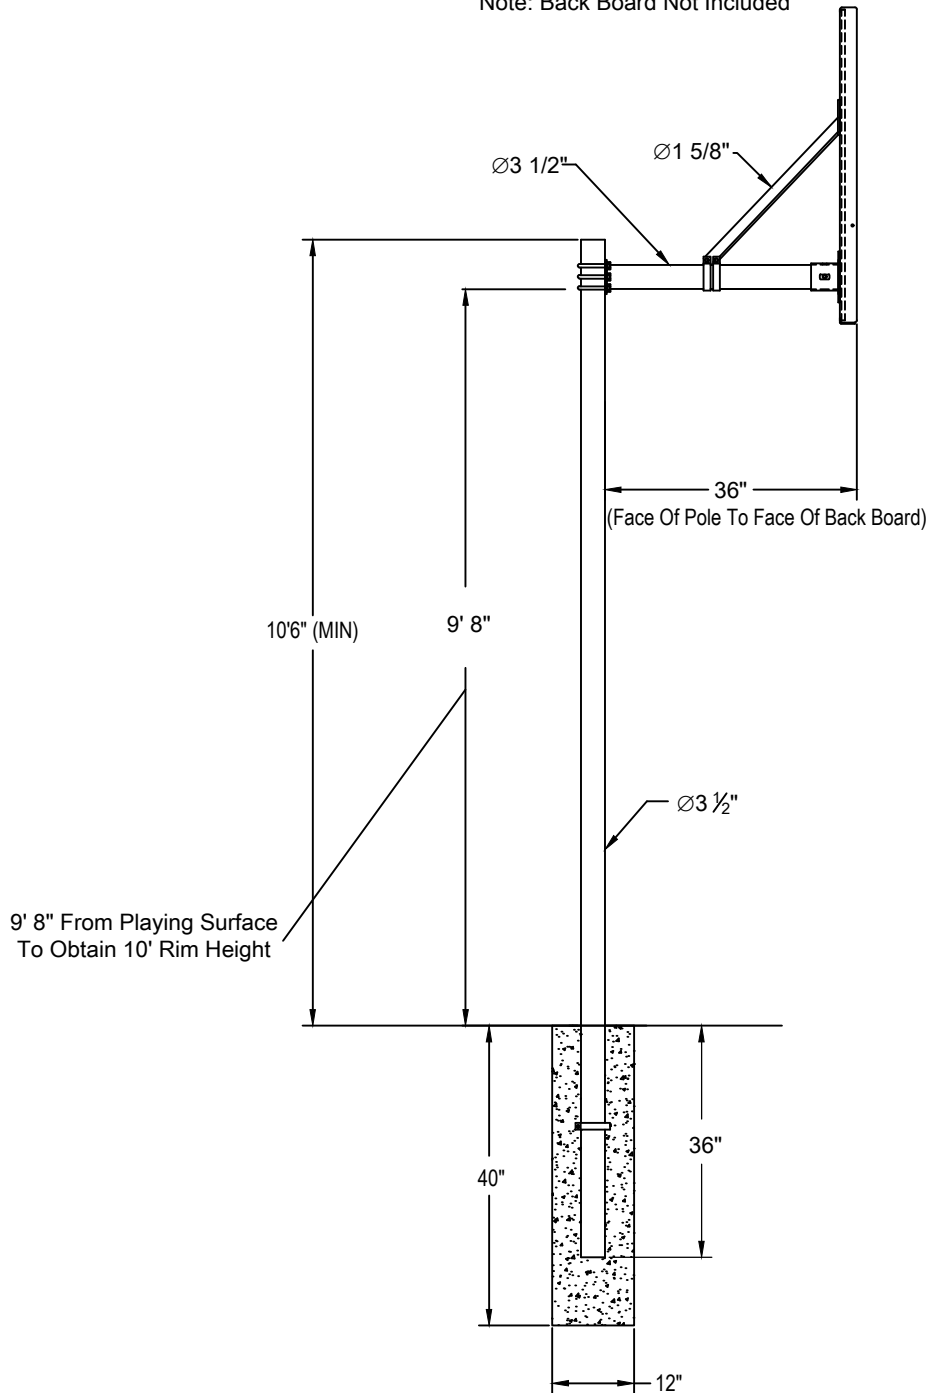

## PRODUCT SPECIFICATION

BA776 ADJUSTABLE TOUGH-DUTY PLAYGROUND POLE

REVISED 7/1/17