

— Instruction Manual —



Customer Service
(800) 247-7668

"J" TRACK FOR WOOD FLANGED, WOOD BACKED WALL PADDING

PARTS LIST

Item	Qty	Description	Item	Qty	Description
A	*	Wall Pads (ordered separately)	B	*	"J" Channel Track (8' lengths)
C	*	"Z" Channel (6' lengths)			

*Quantity is determined by how much wall space to be padded/protected.

- ◆ Inspect all contents prior to installation. Report any missing parts to dealer immediately.
- ◆ Read all instructions before proceeding.

Warning!

Per ASTM F2440-04 The bottom of all wall padding should be mounted no more than 4" from the floor

Warning!

Use eye protection during all drilling operations.

Notice:

In cases where your area to be protected is not divisible by 6' or 8' you will need to cut/trim the "J" Channel Track and "Z" Channel accordingly.

1. Drill 1/4" holes along the extruded line in 50% of the total "J" Channel Tracks (B) and all of the "Z" Channels (C). Holes should be spaced 3" from each end of the extrusions and approximately 12"-18" apart See Figure 1.
2. Position all drilled "J" Channel Tracks (B) no more than 3" from the floor and centered along area to be protected. Check for level.

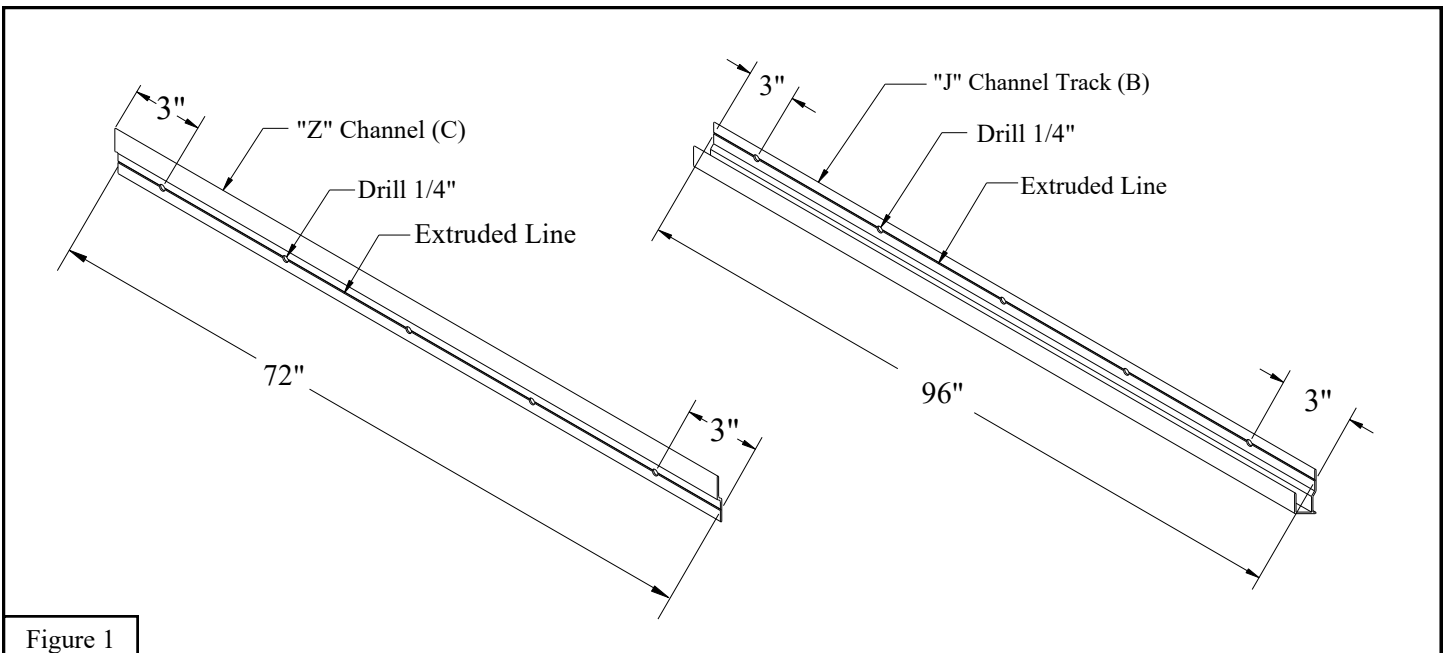


Figure 1

3. Mark the wall through each 1/4" hole in the "J" Channel Tracks (B).
4. Drill and anchor "J" Channel Tracks (B) to wall using appropriate anchors supplied by installer. Spacing and type of fastener is dependent on the type of wall construction. See Figures 1 and 2.
5. To determine "Z" Channel (C) placement on wall, subtract 4 1/4" from overall height of padding wood backer. Measure up from the top of floor mounted (bottom) "J" Channel Track (B). See Figure 2.
6. Repeat instructions #3 and 4 to install "Z" Channel (C). Position the first Wall Pad (A) into the bottom "J" Channel Track (B) starting at one end of area to be protected. Install top "J" Channel Track (B) over the top of pad making sure the leading edge is behind the "Z" Channel (C). Leave the "J" Channel Track (B) loose at this time. See Figure 3.
7. Position the first Wall Pad (A) into the bottom "J" Channel Track (B) starting at one end of area to be protected. Install top "J" Channel Track (B) over the top of pad making sure the leading edge is behind the "Z" Channel (C). Leave the "J" Channel Track (B) loose at this time. See Figure 3.
8. It is common for the wall that the padding is being mounted to not be flat or in the exact same plane. This can cause unsightly wrinkling of the vinyl. Shimming the center of the padding as needed will help offset wall irregularities, stretch the vinyl and improve the finished appearance.
9. Continue installing the remainder of your pad working toward the opposite end. It may be possible to slide each pad section in and/or you may need to wiggle and seat each pad.
10. Once all Wall Pads (A) are positioned press top "J" Channel Track (B) down tight.

