

**SUBMITTAL  
DATA**



**Schwank Air Curtain Swift5 Series:  
Electric Heated - Drive Thru Unit**



<b>PROJECT:</b>	
<b>ENGINEER:</b>	
<b>CONTRACTOR:</b>	
<b>DISTRIBUTOR:</b>	
<b>SCHWANK MODEL:</b>	
<b>Electric Heat</b>	<b>AC-ME32-20                      AC-ME32-20</b>
<b>APPROVED BY:</b>	
<b>DATE:</b>	
<b>APPROVAL #:</b>	

Schwank  
2 Schwank Way  
Waynesboro, Georgia,  
USA, 30830

5285 Bradco Boulevard,  
Mississauga, Ontario,  
Canada, L4W 2A6

Customer and Technical Service  
Phone: 1-877-446-3727  
Fax: 1-866-361-0523  
Email: [csr@schwankgroup.com](mailto:csr@schwankgroup.com)

[www.schwankgroup.com](http://www.schwankgroup.com)

## Notice:

Schwank reserves the right to make changes to equipment and specifications due to revision in standards or to provide product improvement without obligation of notification.

This publication is intended to convey product specifications and information to engineering or other consultants to a particular project. For other reasons, this publication, or parts thereof, may not be reproduced in any form without prior written consent from Schwank. Unauthorized use or distribution of this publication is strictly prohibited.

## Schwank Air Curtain Swift5 Series Features:

The Schwank Air Curtain Swift5 Series is a commercial air curtain intended for small openings such as kiosk and service hatches and cashier benches for heights up to 5ft.



The Swift5 Series Air Curtain is designed to provide quiet operation and energy savings by effectively separating indoor and outdoor environments, restricting entry of unconditioned air, dust, fumes, and insects.

- Sleek unit with corrosion proof housing made of hot zinc-plate & powder enamel steel panels
- Standard Colors:
  - Front — White, RAL 9016, NCS S 0500-N
  - Grille, Real, Side Panel — Grey, RAL 7046
- Mounting Brackets (Included)
- Unit Control Features Include:
  - Unit (On/Off)
  - Fan Step (Low/High)
  - Electric Heat Step (Low/High)
- Motor: 208 Vac/ Single Phase / 60 Hz
- Electric Heaters: 2.5kW / 3.7kW
- Single point of connection
- Sound Rating: 50dB
  - Sound power (LWA) measurements according to ISO 27327-2: 2014, Installation type E.
  - Sound pressure (LpA). Conditions: Distance to the unit 16 ft. Directional factor: 2. Equivalent absorption area: 2153 ft<sup>2</sup>. At lowest/highest airflow.
- 1 Year limited warranty

# Technical & Performance Specifications


## Dimensions

Project Qty	Model	Output (kW)	Airflow <sup>*1</sup> (CFM)	Sound Pressure (dB(A))	FLA (A)	Voltage (V) Amperage (A)	Length	Weight (lb)
	<b>AC-ME32-20</b>	2.5/3.7	200	50	19	208V~/18	32	17

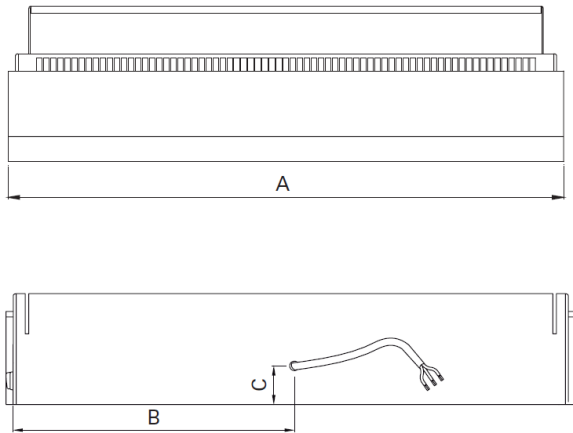

Ref	Imperial (In)
<b>A</b>	31.1
<b>B</b>	15.4
<b>C</b>	2.2
<b>D</b>	6.6
<b>E</b>	6.1
<b>F</b>	2.8
<b>G</b>	2.6
<b>H</b>	1.0

## Minimum distance

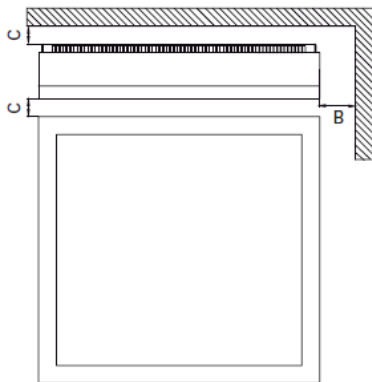

Ref	Imperial (In)
<b>A</b>	19.7
<b>B</b>	3.9
<b>C</b>	2.0
<b>D</b>	1.0

