







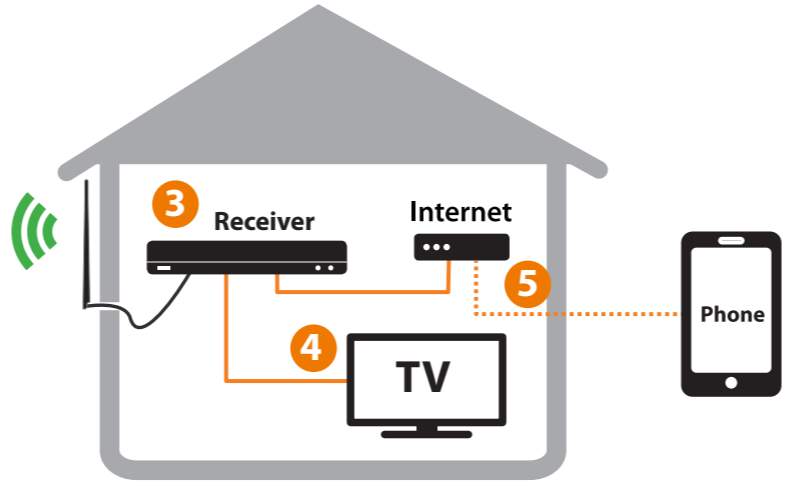






**1250 m**  
Maximum Range  
At Free Line of Sight



## HOW IT WORKS


- 1 The camera monitors your animals. The signal is transmitted through the cable (9-18m) to the outdoor antenna.
- 2 The signal is sent wirelessly to the office/home.
- 3 The receiver receives the signal through its outdoor antenna connected with cable (9-18m).
- 4 By connecting the receiver to your TV you can see the camera picture there as well!
- 5 By connecting the receiver to your internet router you can see your animals/barn/buildings/farm wherever you go, using any smartphone, tablet or computer connected to the internet.

### INCLUDED IN THE BOX


-  x1
-  x1
-  x1
-  x1
-  x2
-  x3
-  x1
-  x1
-  x1
-  x1
-  x3
-  x1

### INSTALLATION

- A** Mount the large outdoor antennas vertically as illustrated below. Place them at the same height and avoid any nearby metal objects. **NOTE:** Only use the large antenna with minimum 9m antenna cable.
- B** Connect the antennas to camera and receiver using the 9 m antenna cables. Connect the camera to power. Water-proof the camera power connector using the shrinkable tube.
- C** Connect the receiver to power. The system will setup automatically.

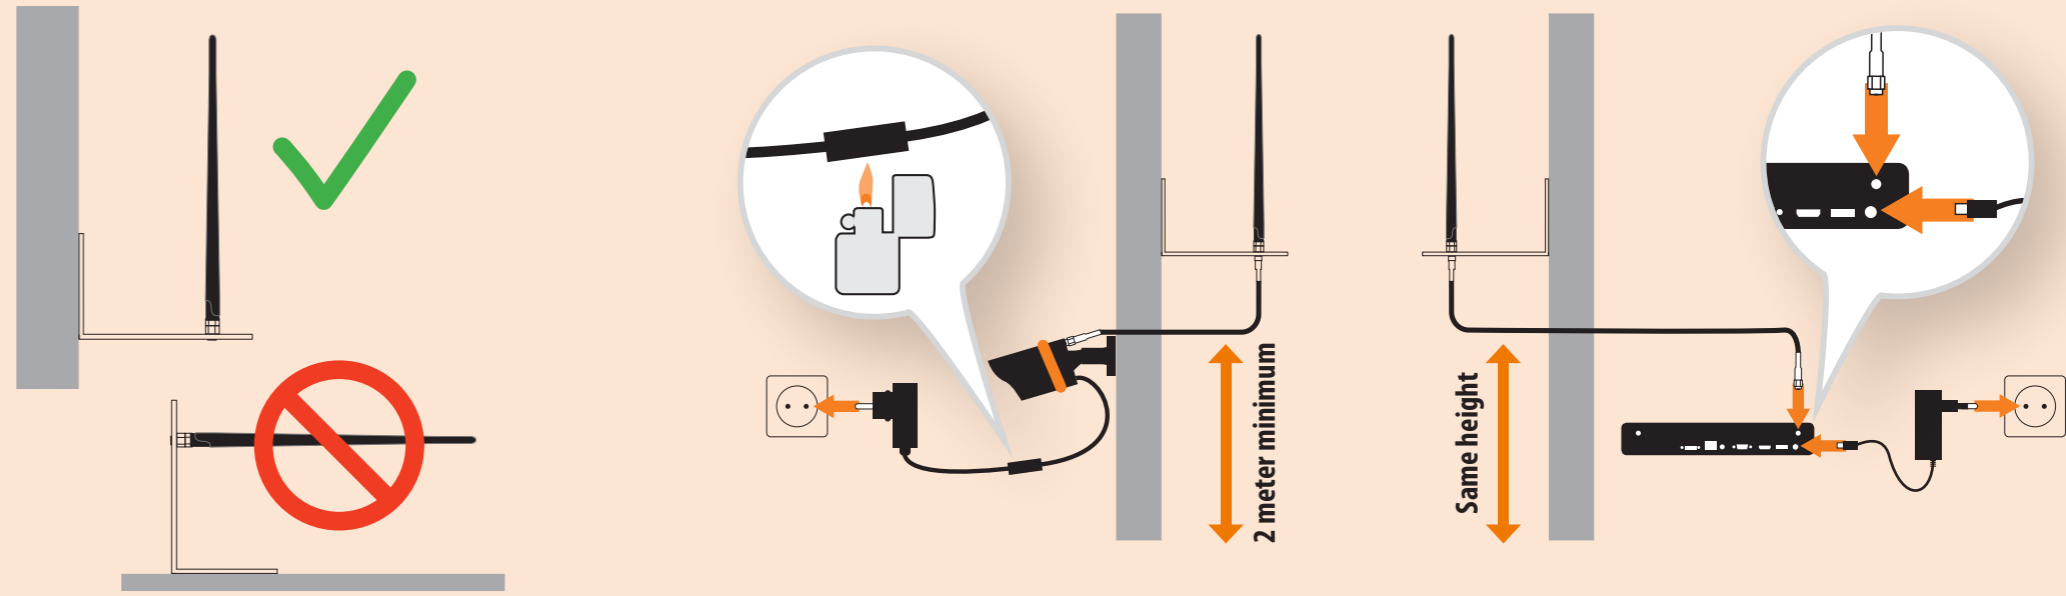


### TIP!

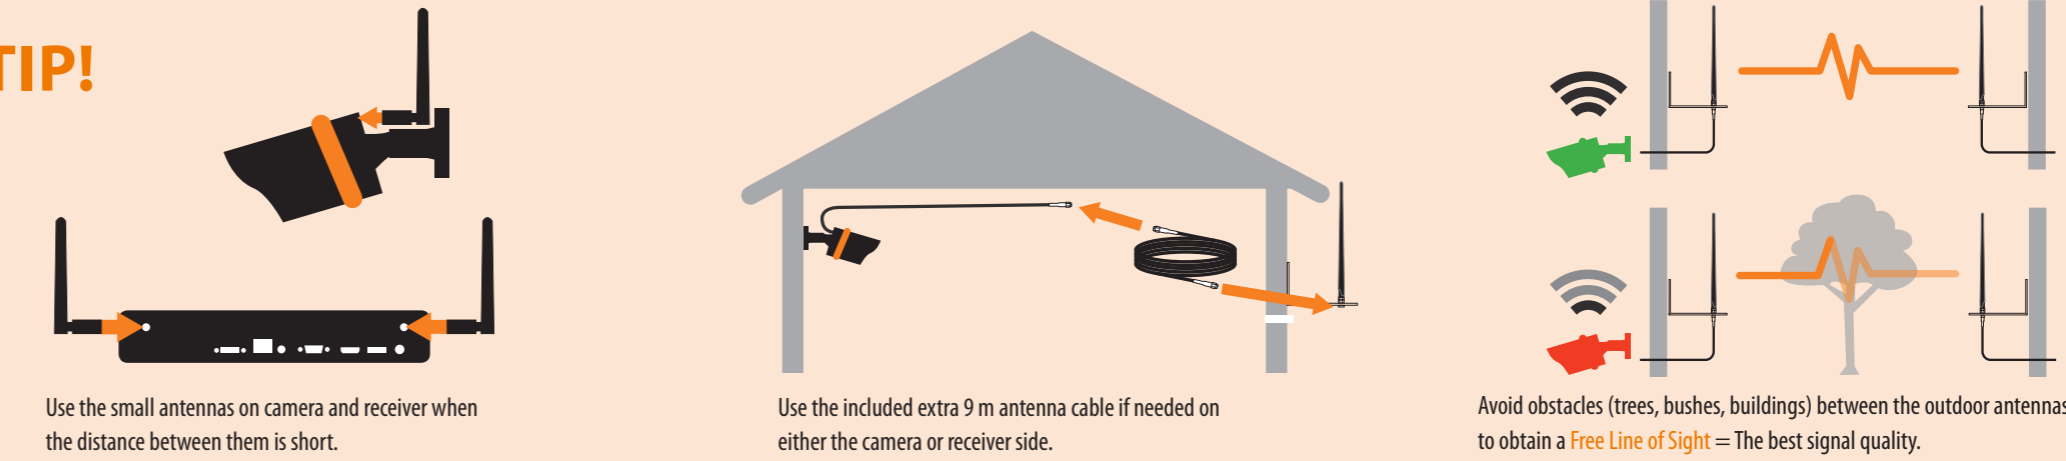


TV installation? START HERE!

**1** Connect the tv and mouse to your receiver.

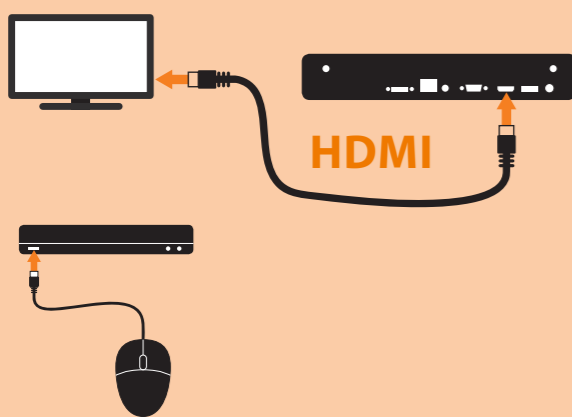

**2** a) Choose the HDMI-channel on your tv  
b) Choose your password (minimum 6 letters). **NOTE!** You must remember the password to log in if you do not choose to tick the checkbox  
c) Click on the ▶ button to save and continue

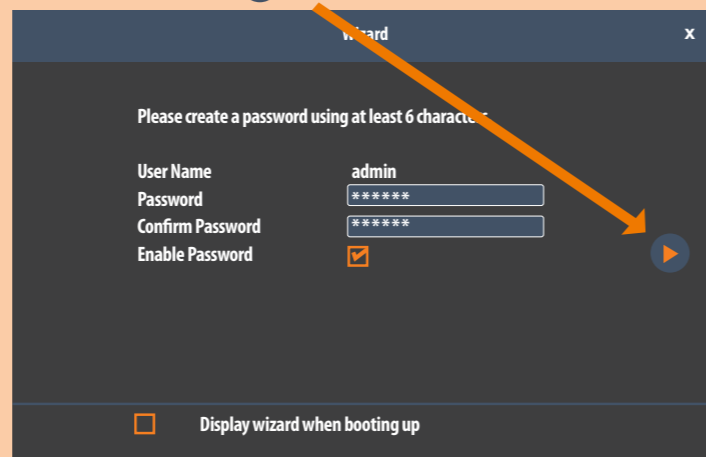

**NOTE!** You can write down your password in the field below

.....

**3** a) Choose your language  
b) Click on the ▶ button to save and on ✕ to finish\*



\*= this is enough to get going with your FarmCam HD. You can do more settings at a later stage.

**4** a) **DOUBLE-CLICK** on the image to get it in full screen  
b) **RIGHT-CLICK** to see the options:




c) **YOU'RE DONE** with the quick setup of FarmCam HD on your tv!


If you want to see the picture on your mobile or pc, continue to step 5.

SmartPhone installation only? START HERE!

**5** Connect the receiver to your broadband router using the ethernet cable.

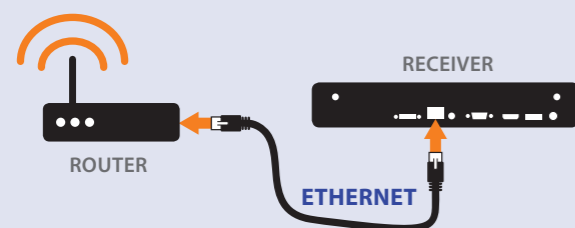

**6** a) Download and install the FarmCam 2.0 app from Appstore or Google play.




b) Open the app:



c) Allow notifications (iPhone only)

**7** Add your system by "Add new device".

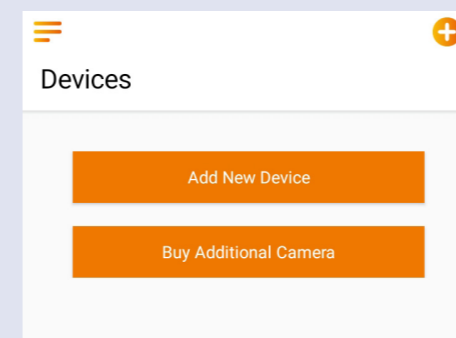

**8** Scan the QR code on the receiver.

**9** Choose a password for the system. Thereafter choose a name.

**10** Cameras within free line of sight range will automatically connect with the receiver and show on the app.

**11** 1 MIN REGISTRATION = 1 YEAR EXTRA WARRANTY Register your farmCam HD and get 3 years warranty.

Go to: [www.luda.farm/warranty-register](http://www.luda.farm/warranty-register)

To download pc-software and read about how to get going with FarmCam HD on your computer,

go to:



[www.luda.farm/farmcam2](http://www.luda.farm/farmcam2)



HOW IT WORKS

How the app works

1. Access to devices
2. Channels
3. Sound
4. Windows
5. Live view
6. Play/stop
7. Take snapshot (to mobile)
8. Record video (to mobile)
9. Video quality
10. Color
11. Full screen
12. Playback mode

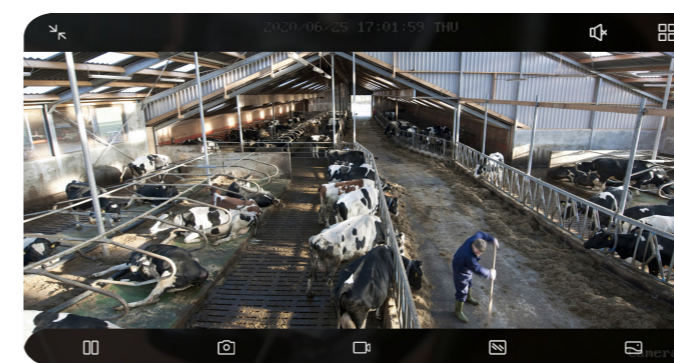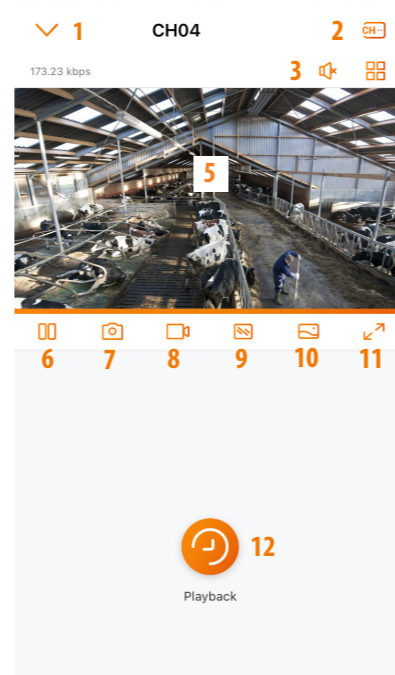

Technical Specifications for Art.No. 1073:

2,4GHz Wireless Camera

Frequency Bands:  
802.11b/g/n(20MHz): 2412-2472MHz  
802.11n(40MHz): 2422-2462 MHz  
Maximum radio frequency effect: up to 20 dBm  
Modulation Mode: CCK7OFDM7DBPSK7DAPSK  
Wireless Range: 1250 m  
Resolution: 1920 x1080p  
Video Frame Rate: 15fps @ 1080p  
Angle of View: 90°  
IR night range: 30 Meters  
Image Sensor: 1/3" 1080P CMOS  
Microphone: Embedded mic  
Power Supply adapter: 100-240V  
Power to camera: DC12V -1A  
Operating temperature: -20 °C~+55 °C  
IP classification: IP66  
Dimensions: Ø70 x 190mm

2,4GHz Wireless Receiver NVR

Frequency Bands:  
802.11b/g/n(20MHz):2412-2472MHz  
802.11n(40MHz):2422-2462 MHz  
Maximum radio frequency effect: up to 20 dBm  
Modulation Mode: CCK7OFDM7DBPSK7DAPSK  
Resolution: 1920 x1080p  
Maximum Cameras: 4  
Hard Drive included: 1 TB  
Video output: HDMI & VGA  
Audio output: RCA  
Network Interface: RJ 45 Ethernet  
Supported systems: Android, Iphone, MAC & PC  
Power Supply adapter: 100-240V  
Power to receiver: DC12V - 2A  
Operating temperature: -10°C~+55°C



Luda.Farm AB,  
Krokslätts Fabriker 30,  
431 37 Mölnal/Sweden