


Gorilla Flex Cool II

Nitrile foam finish palm coated cut resistant glove

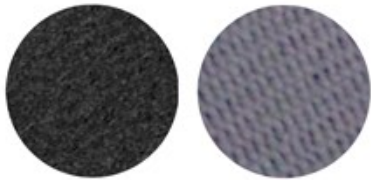

Gorilla Flex Cool II
E142573720
E142573721
E142573722

EN 407:2004 EN 388:2016



X1XXXX



4131XX

EN 420



Standards:

CE Cat. II
EN 388:2016 4131X
EN ISO 21420:2020, EN 407:2004

Features:

Unique NBR micro foam finish provides excellent dry, wet and oil grip performance. 360 degree breathable coating keeps hand cool & comfortable. Ergonomically design for superior fit, feel & comfort. Special blend of engineered covered yarn for high cut performance & protection. Excellent abrasion resistance allows long term use and better durability. Product is in compliance with reach directives, Oeko Tex certified & azo free dyestuff. Coating: Black nitrile rubber coating. 30% coating content. Liner: 15GG machine knitted. Grey, Black & Red. Nylon & spandex. 70% liner content. Length: 220-280mm. Size: Medium, Large, XLarge.

Packing:

12 Dozen/carton

Carton Dimension:

42x29x40 cms

Carton Weight:

Gross Weight:7.33kgs/carton
Net Weight:6.48kgs/carton

Volume:

0.0487CBM

Origin:

Sri Lanka

Application:

General maintenance, agriculture, automotive, construction, mechanical assemble, precision machinery, engineering workshops & logistic.