


Gorilla Flex Oil I

Lightweight, Oil & Water-repellent,
Eco-friendly, Breathable,
Touch Screen.

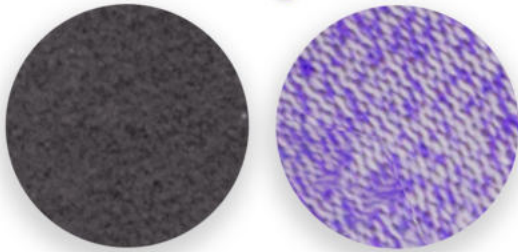

HPT HYDROPELLENT TECHNOLOGY®
Superior Wet Grip

INGENA™
ECO-FRIENDLY YARN



Technical Details:

Liner: 15gg Ingenia™-blend liner
Liner Colour: Royal Blue
Coating: HPT® coating
Coating Colour: Black
Length: 24 cm
Sizes: 8-10

Glove Properties:

Touchscreen capability
Encapsulated air pockets provide
vibration absorption
High resistance to wear and tear
Excellent wet grip
Lightweight for all-day wear

Features:

One-third sustainably sourced ingredients by weight.
Ingenia™ production requires only 70% of the energy
and produces almost 60% less CO2 emissions
than the production of an equal amount of Nylon 6.

Super-soft for extended comfort.

Exceptional moisture wicking.

High elasticity for excellent recovery.

Wrinkle-free.

Breathable.

Standards:

CE, Cat. II
EN388:2016 3121X
EN420:2003/A1:2009

Packing:

1 pair/polybag
120 pairs/carton

Carton Dimension:

42 x 29 x 33cms

Carton Weight:

Gross Weight: 7.48kgs/carton

Volume:

0.04CBM

Sizes	Overlock Color	Item Code
Medium 8	Yellow	M143720220
Large 9	Blue	M143720221
XLarge 10	White	M143720222

Gorilla Flex Oil I

Lightweight, Oil & Water-repellent,
Eco-friendly, Breathable,
Touch Screen.



Origin:
Pakistan

Application:
Automotive Assembly
Warehousing
General Purpose
Materials Handling and Assembly
Precision-based Applications
Shipping and Receiving

The gloves shall not be worn when there is a risk of entanglement with moving parts of machines. None of the materials or processes used in the manufacture of these products is known to be harmful to the wearer.

EN 388:2016 Protection against mechanical risks
3 Abrasion Resistance (Min 0, Max 4)
1 Cut Resistance (Min 0, Max 5)
2 Tear Resistance (Min 0, Max 4)
1 Puncture Resistance (Min 0, Max 4)
X TDM Cut (ISO 13997) (Min A, Max F)



3121X

X means test not tested

Protection levels are measured from palm area of glove. The test results are in-house. Dexterity performance level is 5 in accordance with EN 420:2003+A1:2009.

EU type examination under process by SATRA Technology Europe Ltd, Bracetown Business Park, Clonee, Dublin, D15 YN2P Ireland, (Notified Body No. 2777), in accordance with Regulation EU 2016/425.

Touch screen functionality depend upon size fitting on hand and on environmental conditions. Suitability will be determined by end user.

MARKING:

Name of manufacturer, Style, Size, Sanitized. CE Mark and mechanical pictogram with performance levels.

Glove Size	XS	S	M	L	XL	XXL	XXXL
EN Hand Size as defined in EN 420:2003+A1:2009	6	7	8	9	10	11	12

* The above are designed to fit for special purpose and glove size measurements are made when the glove is laid flat and relaxed. The stretch property of these products allows the gloves to accommodate the hand size quoted above.

Gorilla Flex Oil I

Lightweight, Oil & Water-repellent,
Eco-friendly, Breathable,
Touch Screen.



GLOVE DESCRIPTION:

Knitted Wrist with PVC-HPT coating on nylon, lycra with Ingenia lining palm, front & back of fingers/thumb palm dip.

Touch screen feature with porous finish coating using Hydropellent technology, provides the highest level of grip and soaks up the oil to ensure the hand won't slip in oil conditions.

Greater dexterity and grip in dry and wet applications. Light weight with non-slip surface.

Seamless nylon liner allows to breath and produces minimal lint Dexterity and grip with durability makes this glove an economical choice.

Actifresh or Sanitized treated to provide some protection against organisms which give rise to bad odour and cross infection.

Not recommended for liquid chemicals.

Protection levels are measured from palm area of glove.

STORAGE:

Store dry and cool in its original packaging, sheltered from direct light.

CLEANING / MAINTENANCE/ STORAGE:

Excess contaminant should first be removed and the gloves may be decontaminated with rinse water then rinsed with clean water and dried ideally with some air movement. When the contaminant is not removable or presents a potential hazard it is advisable to ease left and right hand gloves off alternately using the gloved hand so that the gloves are removed without the contaminant contacting bare hands. Gloves should be ideally stored at 5-25 °C in dry, well-ventilated area in original packing. Prevent direct sunlight.

LIMITATION OF USE / RISK:

Gloves are intended to protect hands in working environment in accordance with EN388:2016 and EN420:2003+A1:2009. The user shall evaluate and determine risks based on intended application and use gloves only in intended application. Risk should be evaluated keeping in mind the protection levels and the harmonized standards on which gloves are tested. The described glove series have been evaluated by testing to EN388:2016 and EN420:2003+A1:2009 and covers all reasonably foreseeable risks.

OBSOLESCENCE/DISPOSAL:

When stored as recommended will not suffer change in mechanical properties for up to three years from the date of manufacture. Service life cannot be specified and depends on the application and responsibility of user to ascertain suitability of the glove for its intended use.

GENERAL:

None of the raw materials or processes used in the manufacture of these products is known to have any harmful effect on the wearer. Please note that the results of the tests should help in glove selection, however it must be understood that actual conditions of use cannot be simulated and it is the responsibility of the user, not the manufacturer to determine glove suitability to the intended use. Further information may be obtained from manufacturer.

