

Eye Washer GI-E100

Free-Standing Eye Washer, Galvanized Steel, Model: GI-E100



M339670921

Features:

Controlled, low velocity flow and uninterrupted water supply at 3gpm
 Deliver 11L of water per minute
 Valve actuator are easy to locate and readily accessible to user
 Handsfree stay open valve activate within one second

Supply: 1/2" NPT male inlet

Waste: 1-1/4" NPT female outlet

Spray Head Assembly: Two spray heads, each head has a dust cover, internal flow control, and filter to remove impurities from water flow

Bowl: 11-1/2" diameter ABS plastic bowl
 Valve: 1/2" stainless steel stay-open ball valve

Standard:

EN 15154-1:2006
 EN 15154-2:2006

Packing:

1 piece / packet
 1 packet / carton

Carton Dimensions:

91 x 41 x 30 cms

Carton Weight:

Gross Weight: 10.00 kgs. / carton
 Net Weight: 08.00 kgs. / carton

Volume:

CBM 0.1119

Origin:

China


Applications:

Where the eyes and face of any person may be exposed to injurious or corrosive materials, suitable facilities for quick flushing & cleansing of the eyes and face must be provided within the work area for immediate emergency use. Emergency eye/face wash facilities shall be in unobstructed and accessible locations that require no more than 10 seconds for the injured person to reach

Connect base unit waste receptor to waster water outlet

Connect foot panel chain to hand panel small hole

Assemble base unit to water supplier unit

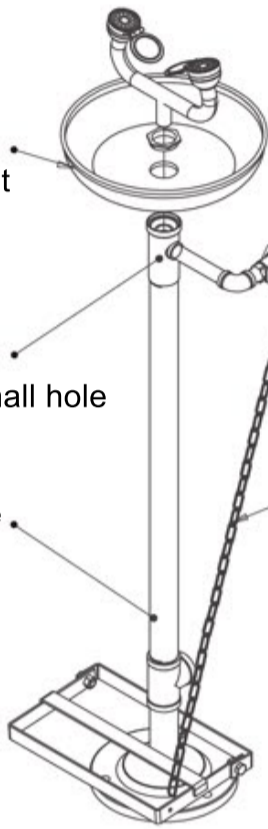

Secure the entire unit to the floor for stability

Connect hose to the water supply



Eye Washer GI-E100

Free-Standing Eye Washer, Galvanized Steel, Model: GI-E100

Assembly & Design Specifications

