

# Eye Washer GI-S100

Eye Washer & Safety Shower, Galvanized Steel, Model: GI-S100



M339670920

### Features:

Controlled, low velocity flow and uninterrupted water supply at 3gpm  
 Shower can provide 76L of water per minute  
 Eye washer unit deliver 11.5L of water per minute  
 Valve actuator are easy to locate & readily accessible to user  
 Handsfree stay open valve activate within one second

**Shower Head:** 8" diameter head

**Shower Valve:** 1" IPS Stainless Steel ball valve

**Eye Wash Valve:** 1/2" IPS Stainless Steel ball stay-open ball valve

**Eye Wash Bowl:** 11-1/2" diameter ABS plastic bowl

**Supply:** 1-1/4" NPT female inlet

**Waste:** 1-1/4" NPT female outlet

**Spray Head Assembly:** Two spray heads, each head has a dust cover, internal flow control, and filter to remove impurities from water flow

**Pipe and Fittings:** Schedule 1-1/4", 1" & 1/2" galvanized steel

### Standard:

EN 15154-1:2006

EN 15154-2:2006

### Packing:

1 piece / packet

1 packet / carton

### Carton Dimensions:

91 x 41 x 30 cms

### Carton Weight:

Gross Weight: 17.5 kgs. / carton

Net Weight: 16.00 kgs. / carton

### Volume:

CBM 0.1119

### Origin:

China

### Applications:


Where the eyes or body of any person may be exposed to injurious or corrosive materials, suitable facilities for quick drenching or flushing of the eyes and body shall be provided within the work area for immediate emergency use. Emergency eyewash facilities and deluge showers shall be in unobstructed and accessible locations that require no more than 10 seconds for the injured person to reach



# Eye Washer GI-S100

Eye Washer & Safety Shower, Galvanized Steel, Model: GI-S100

### Assembly & Design Specifications

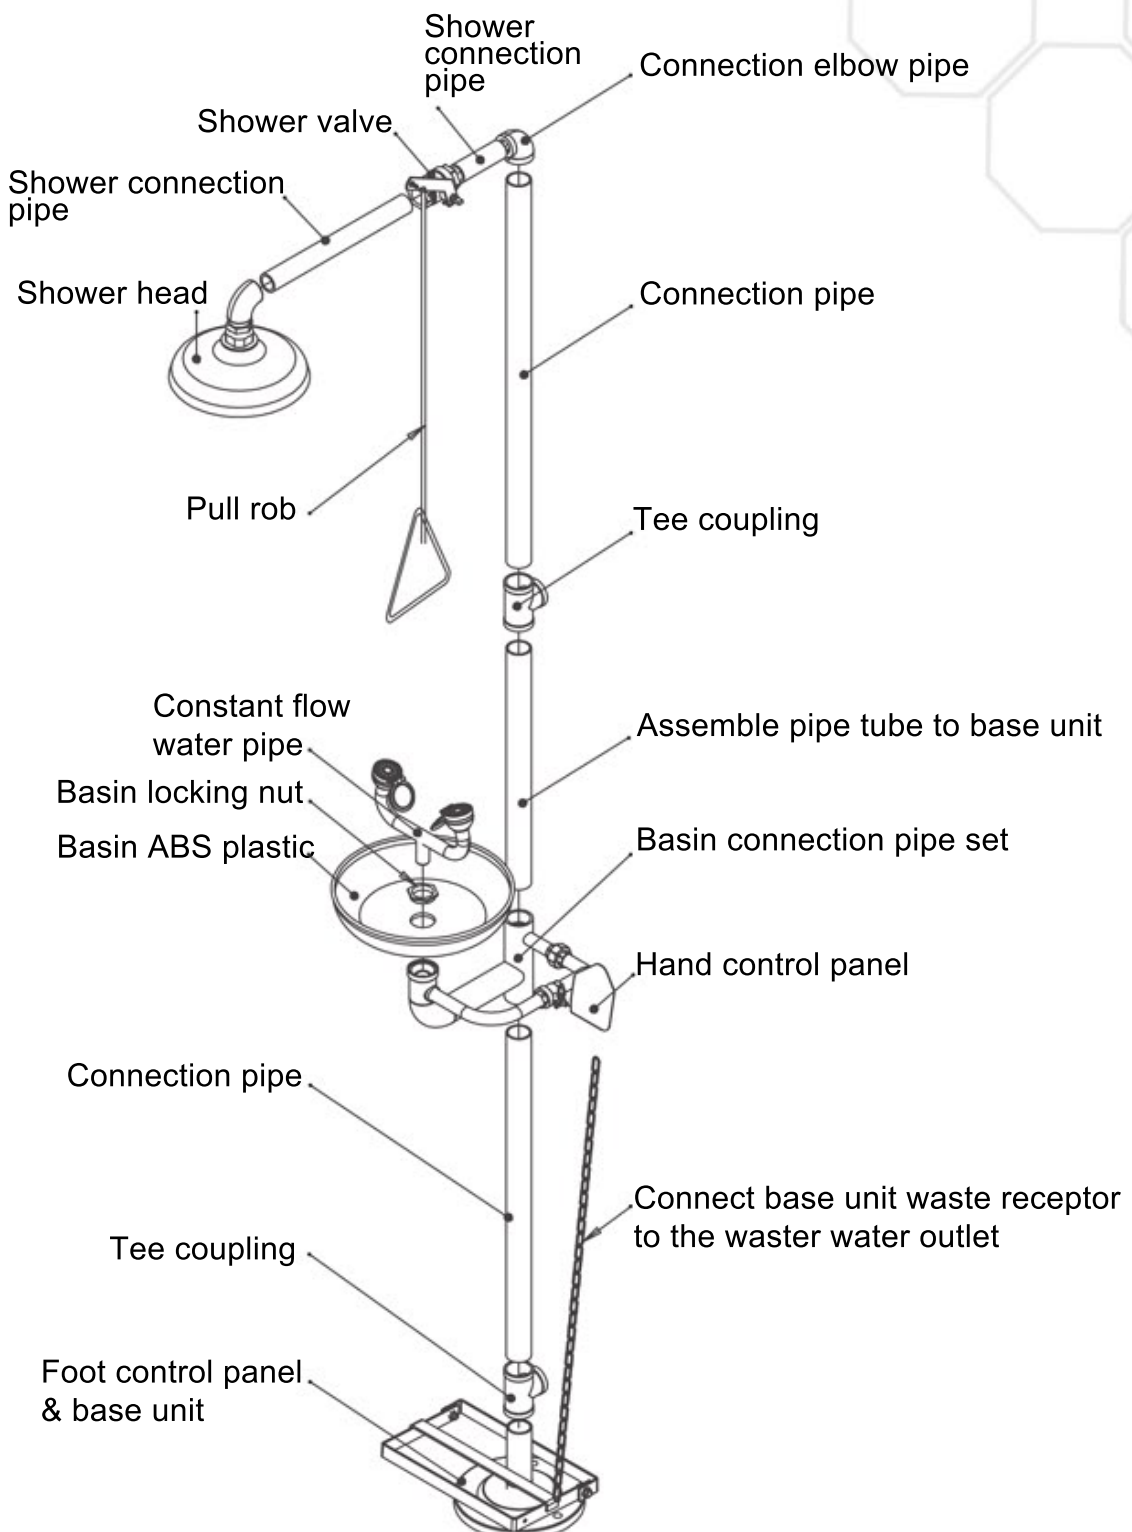

# Eye Washer GI-S100

Eye Washer & Safety Shower, Galvanized Steel, Model: GI-S100

### Assembly & Design Specifications

