

Safety Shower & Eye Washer SS-S100

Combination of Eye Washer & Safety Shower, Stainless Steel, Model: SS-S100



M339670920

Features:

Controlled, low velocity flow and uninterrupted water supply at 3gpm
 Shower can provide 76L of water per minute
 Eye washer unit deliver 11.5L of water per minute
 Valve actuator are easy to locate & readily accessible to user
 Handsfree stay open valve activate within one second

Shower Head: 8" diameter head

Shower Valve: 1" IPS Stainless Steel ball valve

Eye Wash Valve: 1/2" IPS Stainless Steel ball stay-open ball valve

Eye Wash Bowl: 11-1/2" diameter stainless steel bowl

Supply: 1-1/4" NPT female inlet (upper tee joint)

Waste: 1-1/4" NPT female outlet (bottom tee joint)

Spray Head Assembly: Two spray heads, each head has a dust cover, internal flow control, and filter to remove impurities from water flow

Pipe and Fittings: Schedule 1-1/4", 1" and 1/2" stainless steel

Standard:

EN 15154-1:2006

EN 15154-2:2006

Packing:

1 piece / packet

1 packet / carton

Carton Dimensions:

91 x 41 x 30 cms

Carton Weight:

Gross Weight: 18.8 kgs. / carton

Net Weight: 17.5 kgs. / carton

Volume:

CBM 0.1119

Origin:

China

Applications:


Where the eyes or body of any person may be exposed to injurious or corrosive materials, suitable facilities for quick drenching or flushing of the eyes and body shall be provided within the work area for immediate emergency use. Emergency eyewash facilities and deluge showers shall be in unobstructed and accessible locations that require no more than 10 seconds for the injured person to reach



Safety Shower & Eye Washer SS-S100

Combination of Eye Washer & Safety Shower, Stainless Steel, Model: SS-S100

Assembly & Design Specifications

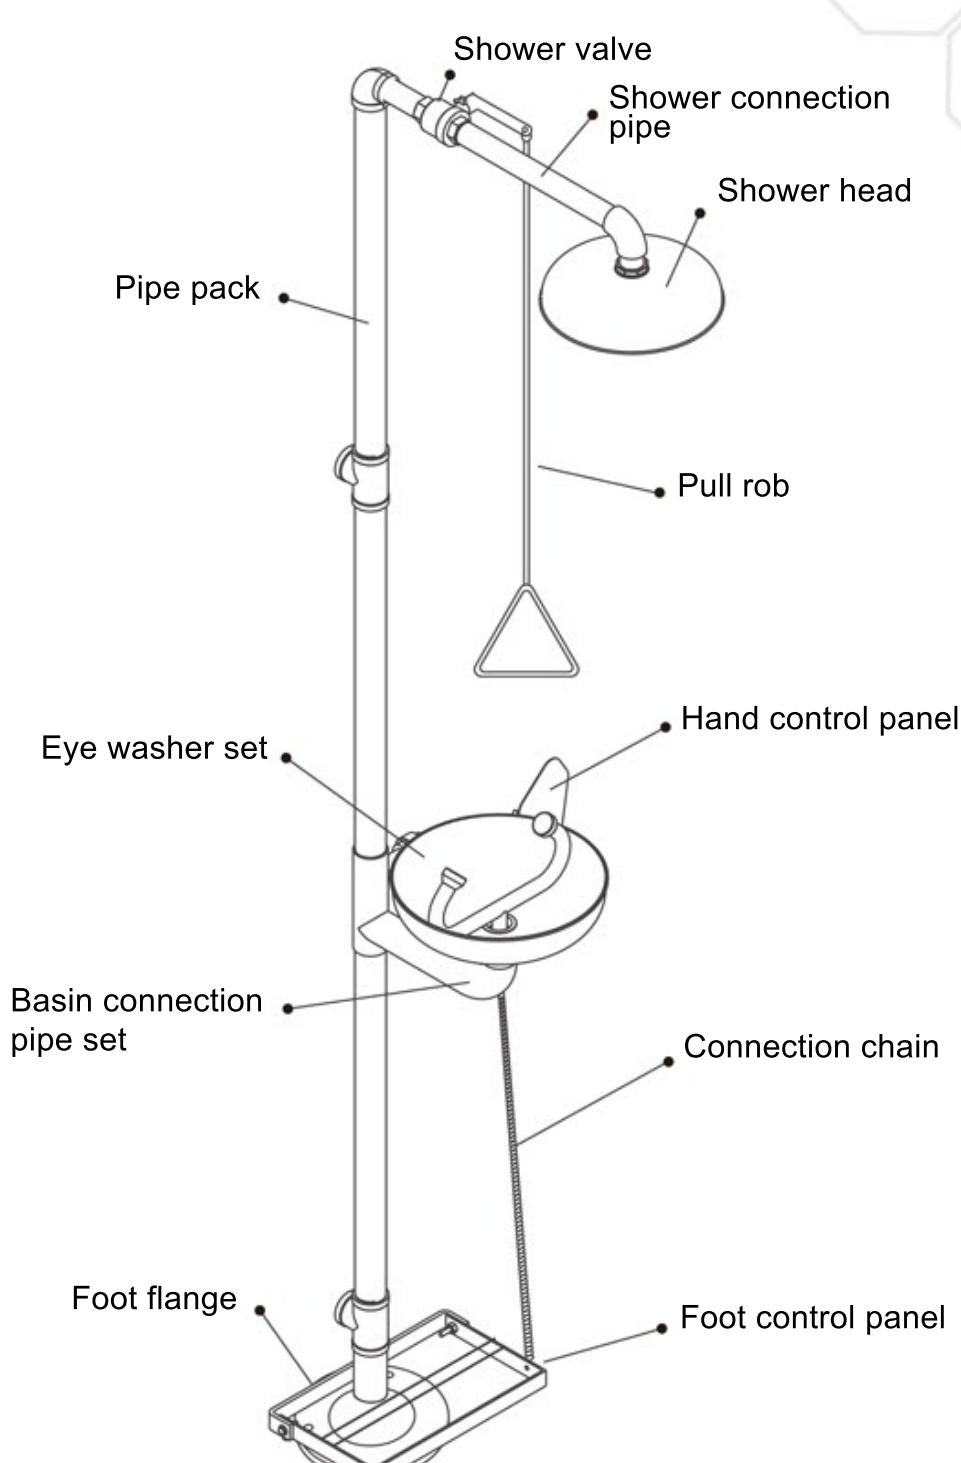

Safety Shower & Eye Washer SS-S100

Combination of Eye Washer & Safety Shower, Stainless Steel, Model: SS-S100

Assembly & Design Specifications

